INCH-POUND

A-A-55120
21 January 1993

COMMERCIAL ITEM DESCRIPTION

LANYARD, INDIVIDUAL EQUIPMENT CARRYING

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-L-10028F.

Abstract. The pistol lanyard is intended for use by the Military Police of the Department of Defense. Class 1 is used by the Army and Class 2 is used by the Navy and Marine Corps.

Classification. The pistol lanyard shall be in the following classes:

Class 1	White
Class 2	Camouflage Green 483

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Salient Characteristics. The adjustable lanyard shall consist of nylon covered cotton core braid, ending in a metal snap hook with swivel; and held together with three plastic keepers. The lanyard shall be adjustable to a maximum length of 35 inches, and be capable of holding a pistol. The bottom keeper shall be adjustable and capable of stowing excess braid; top keeper shall be free for adjusting purposes. Bottom and adjustable keepers will be secured by means of staples. One end of cord shall be seared and stapled to the adjustable keeper with the end extending approximately 1/8 inch beyond the edge of the keeper. The other end of the cord shall be secured, after threading through the swivel eye by zigzag machine stitching (type 308 9-14 stitches per inch). The bottom keeper shall cover the wrapping and stitching as a tight fit. (See Figure 1).

Materials:

Braided Cord:

Core Yarn: The core yarn shall be made from cotton and shall be four ply, bleached or unbleached.

Nylon yarn: The cover yarn shall be two or three ply, multifilament high tenacity.

Braid: The cords shall be braided with nylon yarn over a minimum of 5 ends of cotton core yarn. The cores shall be braided on a 16 carrier machine with a minimum of 2 ends per carrier, with carriers set in pairs, giving a interlacing of over-one and under-one basket stitch.

Finish: The finish of the yarns shall be a bright finish nylon.

Color:

Class 1: The nylon yarn shall be white (undyed).

Class 2: The nylon yarn shall be Camouflage Green 483, and show good colorfastness to laundering and to light.

Snap Hook with swivel:

Hook and swivel: The 1/2 inch snaphook shall be made of steel and shall conform to Waterbury Buckle Company Part No. 402 or equal. The snaphook after being fully depressed, shall snap shut with no gap between the spring and the hook.

Finish: The finish shall consist of a phosphate treated zinc plate, conforming to type IV, SC3 of ASTM B 633, followed by bake enameling.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

403 of the Federal Acquisition ... in accordance with paragraph 4.4

Enamel: The enamel shall be black and shall conform to type 11, class B of TT-E-529. The coating shall level out to a uniform continuous dry film of uniform black color and shall have no objectionable orange peel, wrinkles, drops, streaks, or areas of no film.

Keepers (Top, bottom and adjustable): The 3/4 inch keepers shall be made of extruded vinyl-chloride-acetate copolymer plastic in a black color and in the thickness, shape, and size shown on Figure 1. All keepers shall be the same size and shall show no hardening, cracking, warping, or discoloration after being subject to laundering, dry-cleaning and accelerated service.

Staples: The wire for the staple shall be zinc or cadmium plated steel of 0.018 inch nominal thickness and 0.043 inch nominal width. The crown width of the staple shall be 1/2 +/- 1/32 inch and the leg length of the staple shall be 7/16 +/- 1/32 inch.

Thread: The thread shall be cotton conforming to type I, 3 ply, ticket No. 30 of A-A-52094.

Workmanship. After completion, the finished lanyard shall be thoroughly cleaned, and all loose thread, and foreign matter removed. The item shall be free from irregularities or defects which adversely affect appearance, performance, reliability or durability, such as cuts, frayed cord, cracked or damaged keepers or imperfect snaphook.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract.

Examination. Lots of lanyards shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The inspection level for visual examination shall be II and the AQL 2.5. The sample unit is one lanyard.

Defects. The lanyard shall be examined for the following defects: any hole, cut, tear, seriously affecting serviceability; open seam, badly shaped, or definite variation in color, any stain seriously affecting appearance, stitching excessively tight or loose.

cord: Any construction nonconformity such as unevenly braided, broken, loose or projecting strands, thread ends not removed; colorfastness, ends not seared, measurements not as specified.

hardware: (Plastic keepers, staple, snaphook, swivel): Any component not as specified such as any discoloration, color other than specified, any crack, malformed, peeling.

Physical requirements of cord. The test specified in Table I shall be performed on the braided cord.

Dimensional Examination. The finished lanyard shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one lanyard; the inspection level shall be S-3 and the AQL shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL shall be 2.5.

Examination	Defect
Material	Missing, damaged, not as required.
Content	Number of lanyards per shipping container is more or less than required.

TABLE I. Physical requirements of cord

Diameter inches)1/	Breaking strength (pounds), minimum	Weight per unit length (ounces per liner yard) minimum	Picks per inch, minimum
3/16	225	0.30	9

1/ A tolerance of minus 1/32 inch is permitted.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

End Item Performance Testing. The test specified in Table II shall be performed on components and materials listed in table II for the characteristics shown. The sample unit shall be 5 yards of nylon yarn and three keepers as applicable. The inspection level shall be 6.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Table II - Testing of Components

Components and characteristics	Test Method of FED-STD-191
Dyed nylon yarn colorfastness to:	
laundering	5614
light	5660
Keeper resistance to:	
laundering	5610 2/
dry cleaning	5622
accelerated service	D 756 3/

2/ Except that the soap solution shall not include sodium carbonate and acetric acid solution shall not be used.

3/ In accordance with one complete cycle of Procedure A, ASTM D 756.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Custodians:
Army - GL
Navy - NU

Review Activities:
Army - GL

User Activities:
Navy - MC


Civil Agency Coordinating Activity:
GSA - FSS


Preparing Activity:
DLA - CT

Project No.8465-0108


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

LANYARD, INDIVIDUAL EQUIPMENT CARRYING

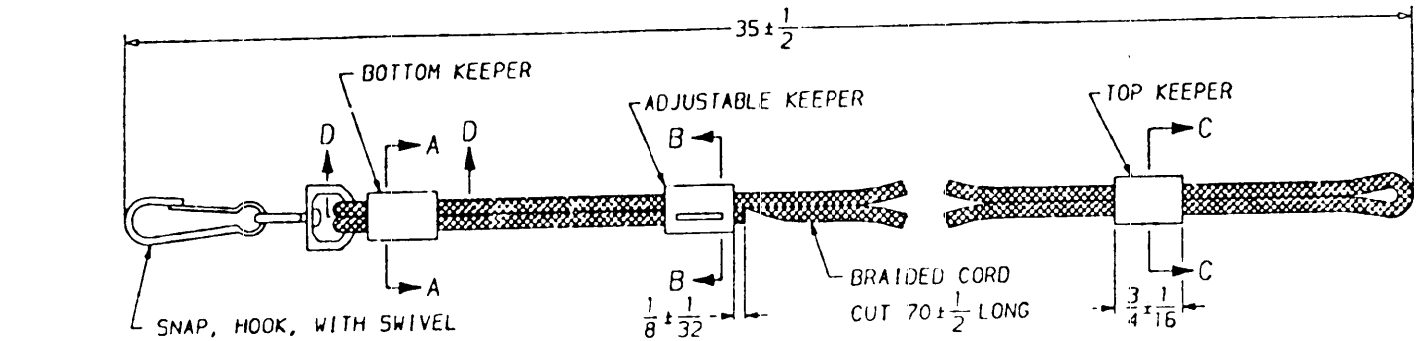


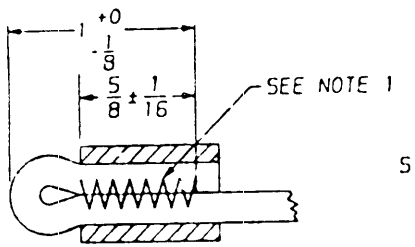


SECTION D-D
(SCALE 2/1)

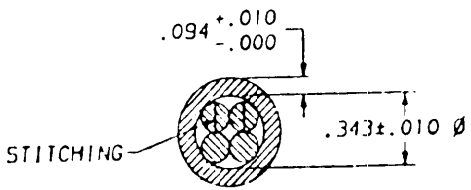

SECTION A-A
(SCALE 2/1)

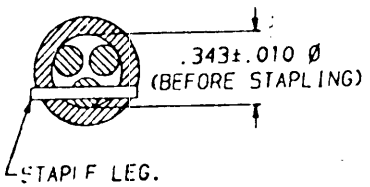

SECTION B-B
(SCALE 2/1)



SECTION C-C
(SCALE 2/1)

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2. 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55120	93/01/15

3. DOCUMENT TITLE
LANYARD, INDIVIDUAL EQUIPMENT CARRYING

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the currentversion before use.