INCH-POUND

MIL-M-28787/48A(SH)
AMENDMENT 2
19 July 1991
SUPERSEDING
AMENDMENT 1
29 December 1982

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

DRIVER, TRANSLATE, DIGITAL, KEY CODE MDP

This amendment forms a part of Military Specification MIL-M-28787/48A(EC), dated 12 February 1979, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

PAGE 2

1.2, Output voltage Delete "Low level (I_{IL} = 0.5 mA)" and substitute "Low level (I_{OL} = 0 5 mA)"

1.2, Output voltage Delete "High level (I_I = 1 5 mA)" and substitute "High level (I_{OH} = 1 5 mA)"

1 3 Delete first sentence in its entirety

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:42Z
Check the source to verify that this is the current version before use.

PAGE 4

3 5 8, second line Delete "M28787/48" and substitute "M28787/48-1"

4.3. Delete and substitute the following

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified "

PAGE 5

* 4 4.2· Delete and substitute the following·

"4.4.2 Order of testing. Test conditions A through T shall be performed in any order with the following exceptions Test conditions A and B are stress tests and shall be performed only at 25 ± 5°C If test conditions A or B are part of a sequence of tests, the order of testing shall be as follows: A, B where applicable, followed by the remaining tests in the sequence."

PAGE 9

Add new paragraph 6.3 as follows

"6 3 Cross reference of classification Military Specification MIL-M-28787/48 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No 10001-2833419 Part number M28787/48-1 supersedes part numbers 2833419 and M28787/48 "

PAGE 11

FIGURE 3 Delete and substitute new figure 3 as printed on page 4 of this amendment.

PAGE 12

* FIGURE 4· Delete and substitute new figure 4 as printed on page 5 of this amendment

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:42Z
Check the source to verify that this is the current version before use.

PAGE 24

FIGURE 8: Delete and substitute new figure 8 as printed on page 6 of this amendment

PAGE 36

FIGURE 15: Delete and substitute new figure 15 as printed on page 7 of this amendment.


NOTE The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment

Preparing activity
Navy - SH

(Project 5963-N812)

Agent NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:42Z
Check the source to verify that this is the current version before use.

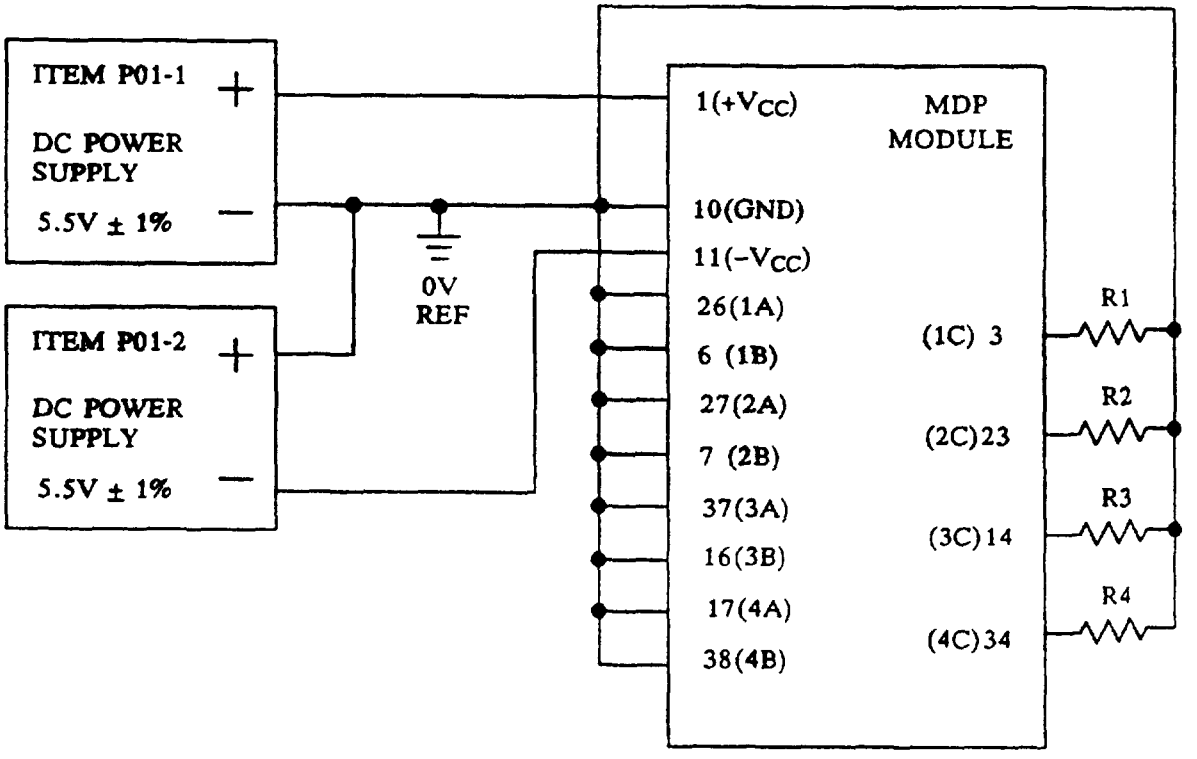

NOTE R1-R4 = 5 9kΩ ± 1%, 1/4W

FIGURE 3 Transient thermal test circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:42Z
Check the source to verify that this is the current version before use.


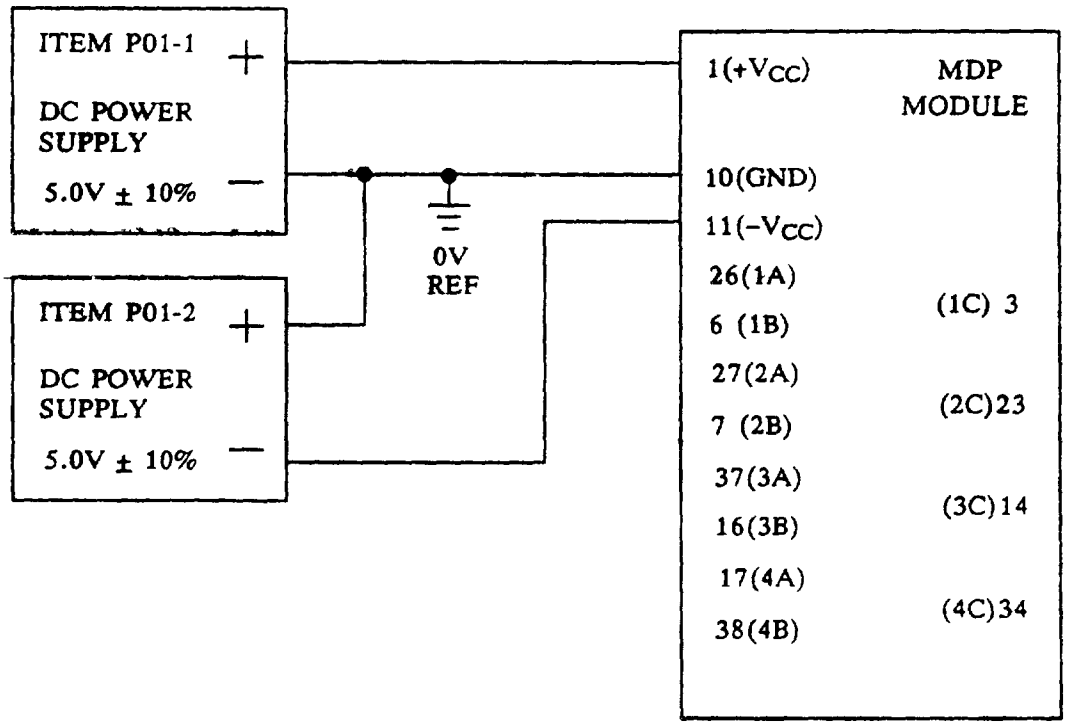


FIGURE 4. Vibration test circuit.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:42Z
Check the source to verify that this is the current version before use.

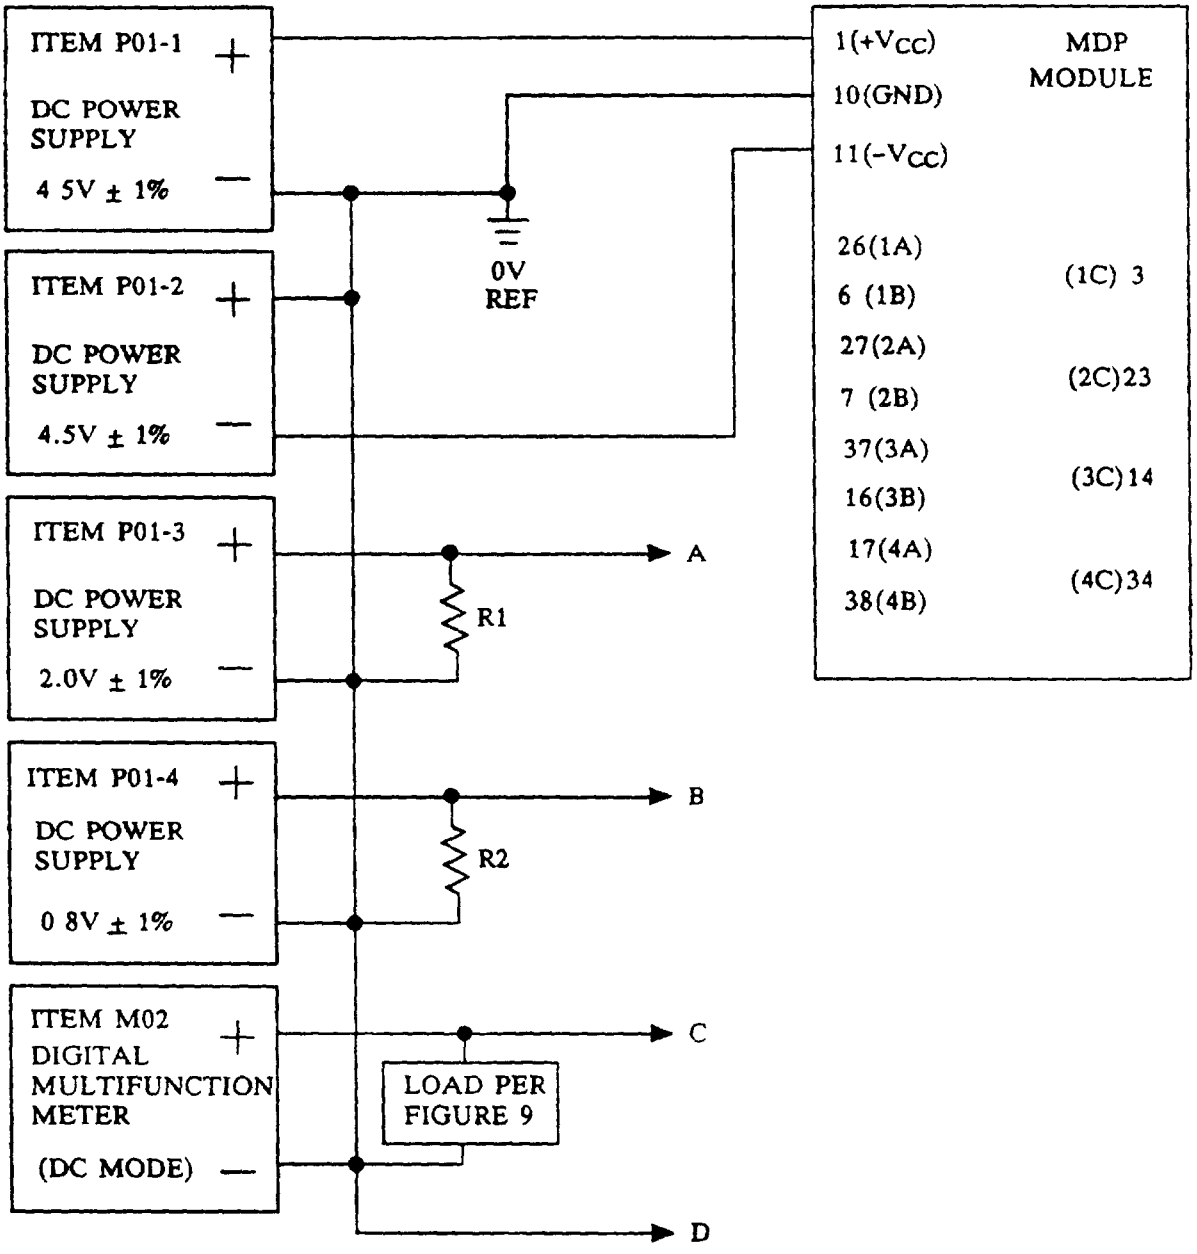

NOTES:
1 R1 = R2 = 51Ω ± 5%, 1 W
2 After connecting points A, B, and C and prior to making each measurement, apply point D to point C for a minimum of 1 second, then remove point D from point C.

FIGURE 8 Output voltage (high-level and low-level) test circuit for tables VI and VII

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:42Z
Check the source to verify that this is the current version before use.

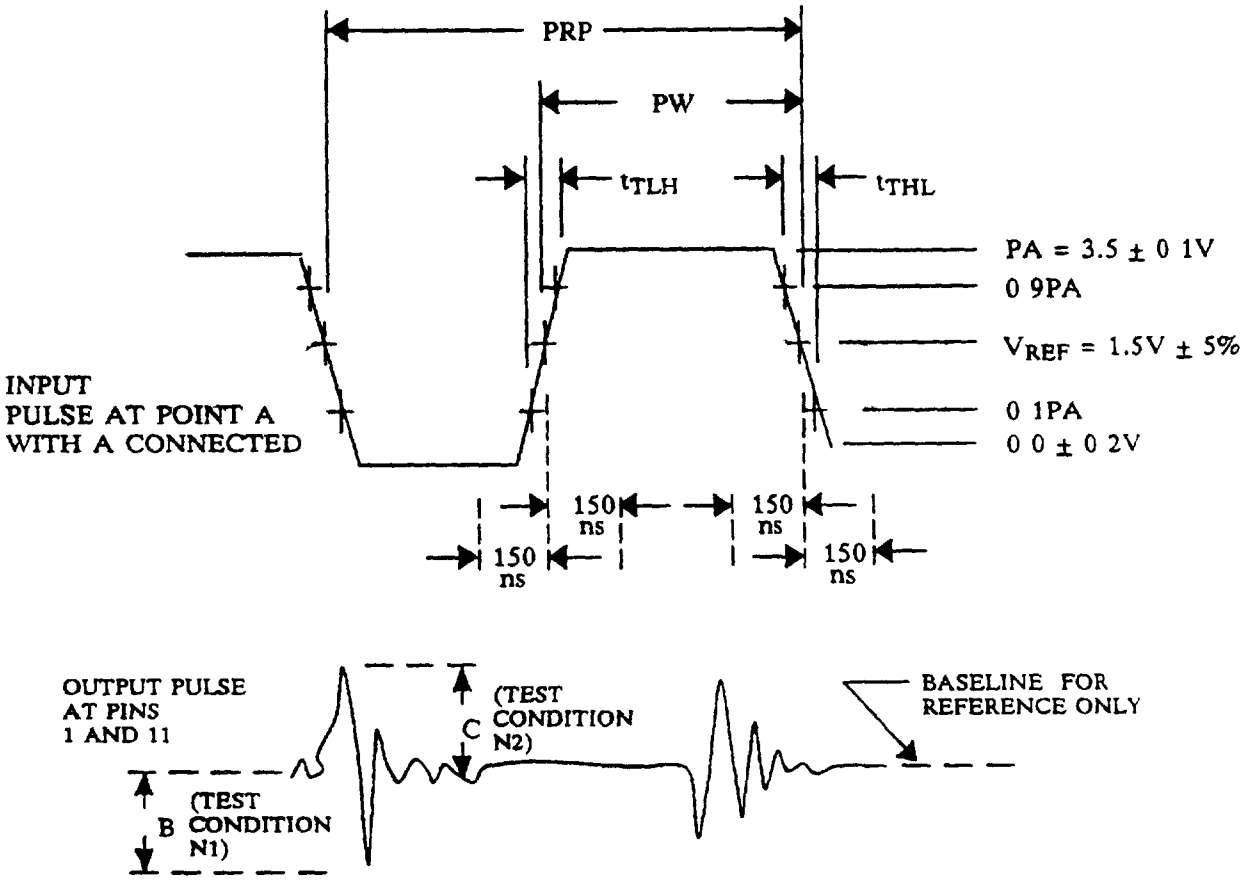

NOTES

1 Input pulse parameters·
PW = 1µs ± 10%
PRP = 2µs ± 10%.
$t_{TLH} = t_{THL}$ = 10 ± 2ns

2. Amplitude B is measured from the baseline to the most negative excursion of the pulse, which may occur in time coincidence ± 150ns with the 1.5Vdc point of either the leading edge or the trailing edge of the input pulse.
3. Amplitude C is measured from the baseline to the most positive excursion of the pulse, which may occur in time coincidence ± 150ns with the 1.5Vdc point of either the leading edge or the trailing edge of the input pulse

FIGURE 15 Power supply transient amplitude ($+V_{CC}$ and $-V_{CC}$) test circuit waveforms for table XII

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:42Z
Check the source to verify that this is the current version before use.