AMENDMENT 1
14 July 1980

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

DIODE, PAIRS, DIGITAL, KEY CODE KDF

This amendment forms a part of Military Specification MIL-M-28787/49A(EC), dated 20 September 1979, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is avilable for use by all Departments and Agencies of the Department of Defense.

PAGE 3

* 4.3, delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 5

* TABLE I, Test condition L1-L24: Delete and substitute:

L1-L24	Peak one cycle surge current	VI	Q	0.0	5.0	--	--	--	--	--	--	A	

PAGE 6

* 4.5.3, third line: Delete "A through K" and substitute "A, and D through K".

* 6.3, delete and substitute the following:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/49 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2658729. Part number M28787/49-1 supersedes part numbers 2658729 and M28787/49."

PAGE 11

* FIGURE 4: Delete and substitute figure 4 as printed on page 3 of this amendment.

PAGE 22

* FIGURE 5. Delete and substitute figure 5 as printed on page 4 of this amendment.

PAGE 26

FIGURE 6: Delete and substitute figure 6 as printed on page 5 of this amendment.

PAGES 27 AND 28

* TABLE VI, Test conditions L1 through L24, Min column: Delete "5.0" (four places) and substitute "0.0" (four places).

* TABLE VI, Test conditions L1 through L24, Max column: Delete "-" (four places) and substitute "5.0" (four places).

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:43Z
Check the source to verify that this is the current version before use.


NOTE: The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N413)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:43Z
Check the source to verify that this is the current version before use.

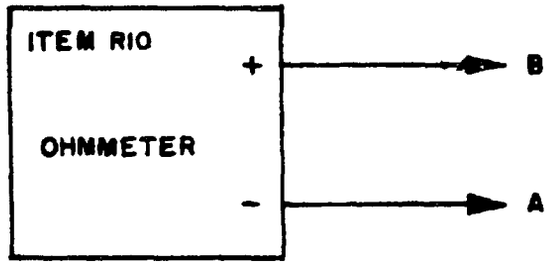


NOTE: Penetrate the anodized finish of the module fin with a sharply pointed probe and measure the resistance between the fin and the pin.

KDF MODULE	
27 (A1)	(K2) 18
	(A2,K1) 13
3 (A4)	(K3) 8
	(A3,K4) 4
7 (A6)	(K5) 38
	(A5,K6) 14
2 (A8)	(K7) 28
	(A7,K8) 24
34(A10)	(K9) 19
	(A9,K10) 15
23 (A12)	(K11) 9
	(A11,K12) 5
33 (A14)	(K13) 39
	(A13,K14) 35
22 (A16)	(K15) 29
	(A15,K16) 25
32 (A18)	(K17) 20
	(A17,K18) 37
21 (A20)	(K19) 10
	(A19,K20) 26
31 (A22)	(K21) 40
	(A21,K22) 36
1 (A24)	(K23) 30
	(A23,K24) 6
11 (FRAME GND)	

FIGURE 4. Frame continuity test for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:43Z
Check the source to verify that this is the current version before use.

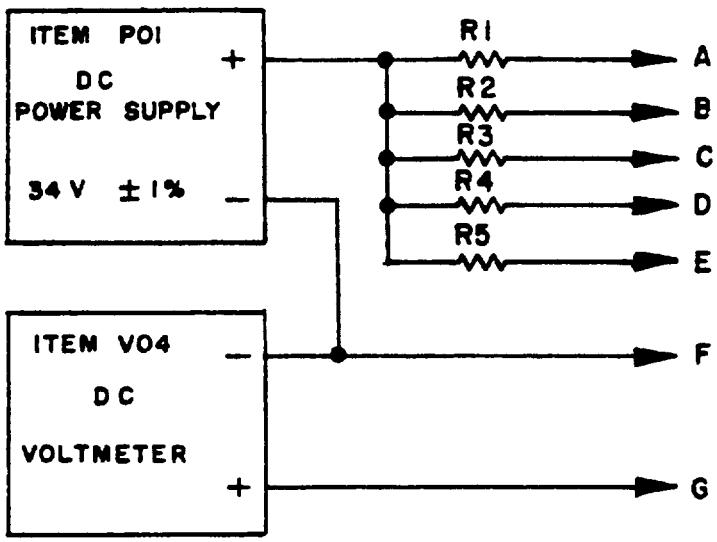


KDF MODULE	
27 (A1)	(K2) 18
	(A2,K1) 13
3 (A4)	(K3) 8
	(A3,K4) 4
7 (A6)	(K5) 38
	(A5,K6) 14
2 (A8)	(K7) 28
	(A7,K8) 24
34 (A10)	(K9) 19
	(A9,K10) 15
23 (A12)	(K11) 9
	(A11,K12) 5
33 (A14)	(K13) 39
	(A13,K14) 35
22 (A16)	(K15) 29
	(A15,K16) 25
32 (A18)	(K17) 20
	(A17,K18) 37
21 (A20)	(K19) 10
	(A19,K20) 26
31 (A22)	(K21) 40
	(A21,K22) 36
1 (A24)	(K23) 30
	(A23,K24) 6
11 (FRAME GND)	

NOTES:
1. R1 = 68.1 kΩ ±1%, 1/4 W.
2. R2 = 11.0 kΩ ±1%, 1/4 W.
3. R3 = 3.32 kΩ ±1%, 1/2 W.
4. R4 = 332Ω ±1%, 4 W.
5. R5 = 133Ω ±1%, 10 W.

FIGURE 5. Forward voltage drop test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:43Z
Check the source to verify that this is the current version before use.

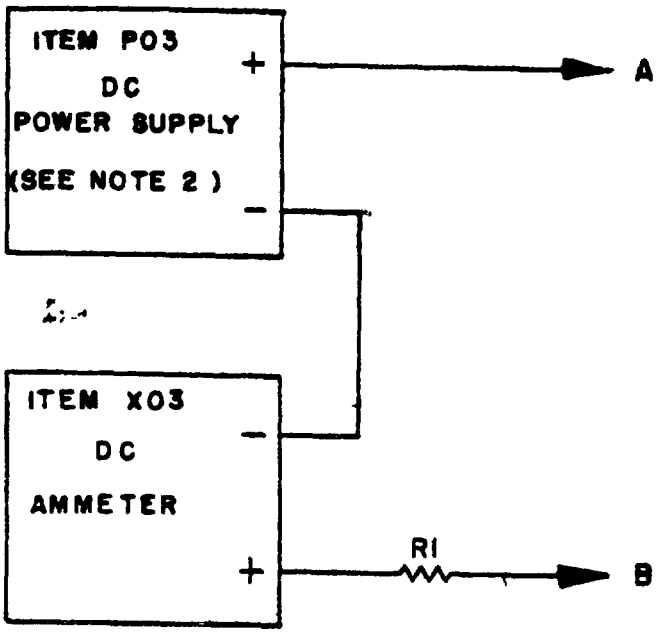

KDF MODULE	
27 (A1)	(K2) 18 (A2,K1) 13
3 (A4)	(K3) 8 (A3,K4) 4
7 (A6)	(K5) 38 (A5,K6) 14
2 (A8)	(K7) 28 (A7,K8) 24
34 (A10)	(K9) 19 (A9,K10) 15
23 (A12)	(K11) 9 (A11,K12) 5
33 (A14)	(K13) 39 (A13,K14) 35
22 (A16)	(K15) 29 (A15,K16) 25
32 (A18)	(K17) 20 (A17,K18) 37
21 (A20)	(K19) 10 (A19,K20) 26
31 (A22)	(K21) 40 (A21,K22) 36
1 (A24)	(K23) 30 (A23,K24) 6
11 (FRAME GND)	

WARNING

High voltage (400 Vdc) will be present at the output binding posts of item P03 during test condition J. Always reduce the output voltage to zero volts before connecting and disconnecting the leads.

NOTES:
1. RT = 100 kΩ ±1%, 1/4 W.
2. For test conditions J1-J24 set item P03 at 400 V. For test conditions K1-K24 set item P03 at 10 V.

FIGURE 6. Reverse current test circuit for table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:43Z
Check the source to verify that this is the current version before use.