INCH-POUND

MIL-M-28787/51B(SH)
AMENDMENT 1
19 July 1991

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

RECEIVER, TRANSLATE, DIGITAL, KEY CODE MDQ

This amendment forms a part of Military Specification MIL-M-28787/51B(EC), dated 14 December 1982, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 6

4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through V shall be performed in any order with the following exceptions. Test condition A is a stress test and shall be performed only at 25 ± 5°C. If test condition A is part of a sequence of tests, the order of testing shall be as follows: A where applicable, followed by the remaining tests in the sequence."

PAGE 7

6.4, Output current, Low level (V_{OL} = 0.4V): Delete "1 73mA maximum" and substitute "1 6mA maximum".

6.4, Output current, High level (V_{OH} = 2.4V): Delete "100µA maximum" and substitute "−100µA maximum".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:43Z
Check the source to verify that this is the current version before use.

PAGE 21


FIGURE 8. Delete and substitute new figure 8 as printed on page 3 of this amendment

Preparing activity
Navy - SH

(Project 5963-N813)

Agent NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:43Z
Check the source to verify that this is the current version before use.

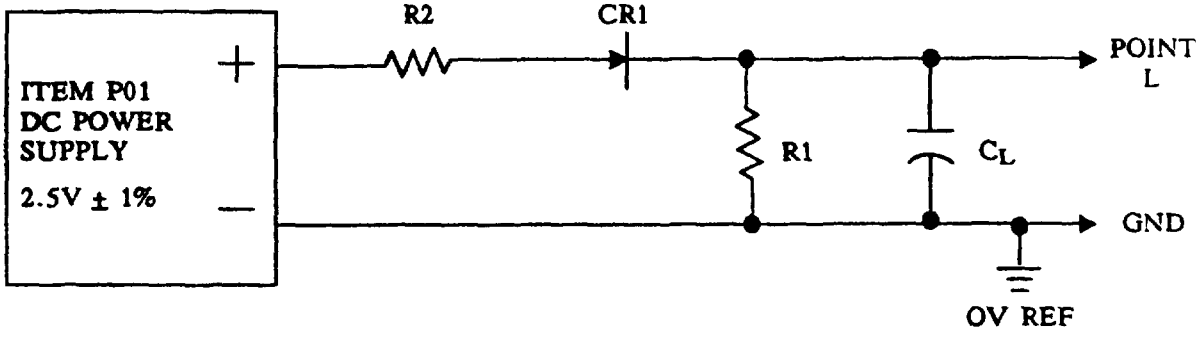

NOTES:
1. R1 = Select value for a current flow of 0.1mA ± 1% into point L when L is held at 2.4Vdc.
2. R2 = Select value for a current flow of 1.6mA ± 1% when point L is held at 0.4V.
3. C_L = 50 ± 3pF (including probe and parasitic capacitance).
4. CR1 = 1N4150, or equivalent.
5. C_L is not required for dc electrical tests C1-C4, D1-D4, E1-E12, and F1-F8.
6. The maximum lead length from point L to the appropriate module pin shall be 3 inches (76.2mm).
7. During output switching, the 2.5V power supply shall have a maximum overshoot of 500mV.

FIGURE 8. Logic load circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:43Z
Check the source to verify that this is the current version before use.