INCH-POUND

MIL-M-28787/54B
AMENDMENT 1
16 December 1992

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

RECEIVER, INTERFACE, DIGITAL, KEY CODE QDH

This amendment forms a part of Military Specification MIL-M-28787/54B(EC), dated 19 July 1982, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test conditions D1-D2, Test type column: Delete "S" and substitute "X".

TABLE I, Test conditions D3-D6, Test type column: Delete "S" and substitute "X".

TABLE I, Test conditions F9-F12, Min columns: Delete "0.5" (four places) and substitute "0.0" (four places).

TABLE I, Test conditions G1-G4, Test type column: Delete "X" and substitute "S".

TABLE I, Test conditions G5-G8, Test type column: Delete "X" and substitute "S".

TABLE I, Test condition K, Test type column: Delete "S" and substitute "X".

TABLE I, Test condition L, Test type column: Delete "S" and substitute "X".

PAGE 6

4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through W shall be performed in any order with the following exceptions. Test conditions A, B, C, and G are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, or G are part of a sequence of tests, the order of testing shall be as follows: A, B, C, and G where applicable, followed by the remaining tests in the sequence."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:44Z
Check the source to verify that this is the current version before use.

4.5.1: Delete and substitute the following:

"4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through W in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions D through F, and H through T shall be performed in the order specified in 4.4.2 using the initial limits for applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2."

4.5.3: Delete and substitute the following:

"4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests D through F and H through T shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements in table I. Following the return of the module to 25 ± 5°C, electrical tests D through F and H through T shall be performed in the order specified in 4.4.2 using the 25 ± 5°C ambient end-of-life requirements in table I.

PAGE 14

FIGURE 6: Delete and substitute new figure 6 as printed on page 3 of this amendment.

PAGE 19

TABLE VII, Test conditions F9, F10, F11, and F12, Unit column: Delete "uA" and substitute "mA".

TABLE VII, Test conditions F9, F10, F11, and F12, Min column: Delete "0.5" (one place) and substitute "0.0" (one place).


Custodians:
Army - ER
Navy - SH
Air Force - 85

Preparing activity:
Navy - NW

(Project 5963-0107)

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:44Z
Check the source to verify that this is the current version before use.

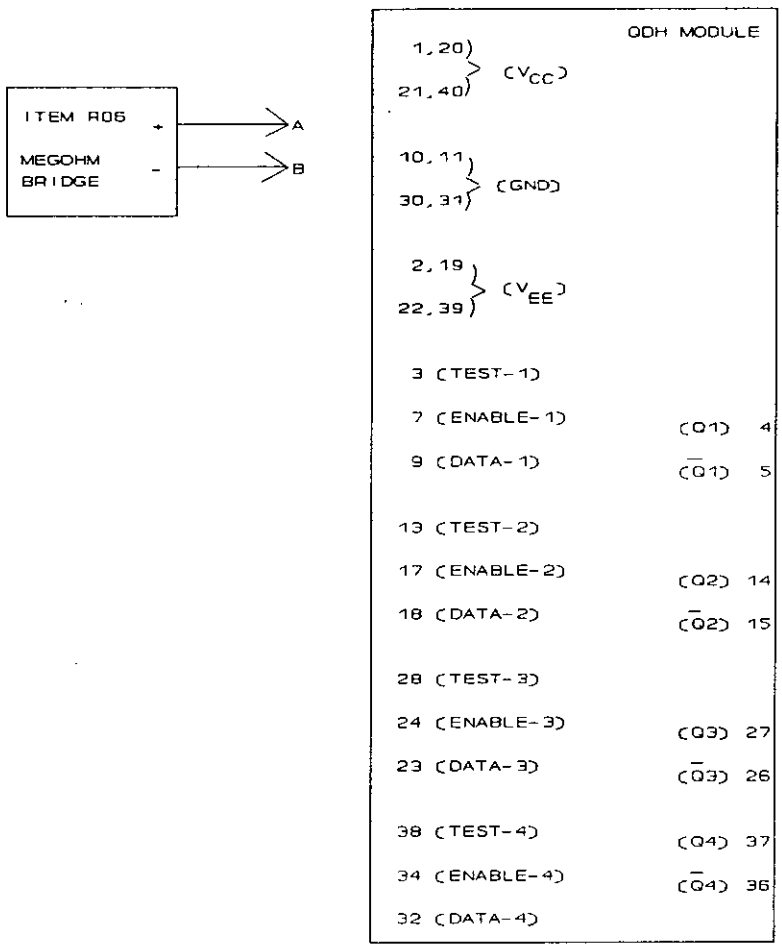

WARNING

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

NOTES:

1. On test condition B2, (when measuring to frame) penetrate the anodized finish of the module frame with a sharply pointed probe connected to the negative terminal.

2. For test condition B1, the megohm bridge voltage shall be 30 ± 3 Vdc.

3. For test condition B2, the megohm bridge voltage shall be 100 ± 10 Vdc.

FIGURE 6. Isolation test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:44Z
Check the source to verify that this is the current version before use.