MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

SWITCH, ANALOG, ANALOG, KEY CODE TTY

This amendment forms a part of Military Specification MIL-M-28787/57A(EC), dated 25 October 1978, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Bottom of page: Delete "FSC MISC" and substitute "FSC 5963".

PAGE 3

3.5.8, second line: Delete "M28787/57" and substitute "M28787/57-1".

PAGES 3 AND 4

4.3, delete and substitute:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 5

FIGURE 1: Delete and substitute figure 1 as printed on page 3 of this amendment.

PAGE 7

* TABLE I, Test conditions P1-P16, Min columns: Delete "0" (four places) and substitute "-0.1" (four places).

PAGE 8

Add new 6.3 as follows:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/57 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2833417. Part number M28787/57-1 supersedes part numbers 2833417 and M28787/57."

PAGE 17

FIGURE 5: Delete and substitute figure 5 as printed on page 4 of this amendment.

PAGE 19

FIGURE 6: Delete and substitute figure 6 as printed on page 5 of this amendment.

PAGE 25

FIGURE 9: Delete and substitute figure 9 as printed on page 6 of this amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

PAGE 27

* FIGURE 10: Delete and substitute figure 10 as printed on page 7 of this amendment.

PAGE 37

* TABLE XII, Min limits column: Delete "0" (two places) and substitute "-0.1" (two places).


NOTE: The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in the notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notation and relationship to the last previous amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N651)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

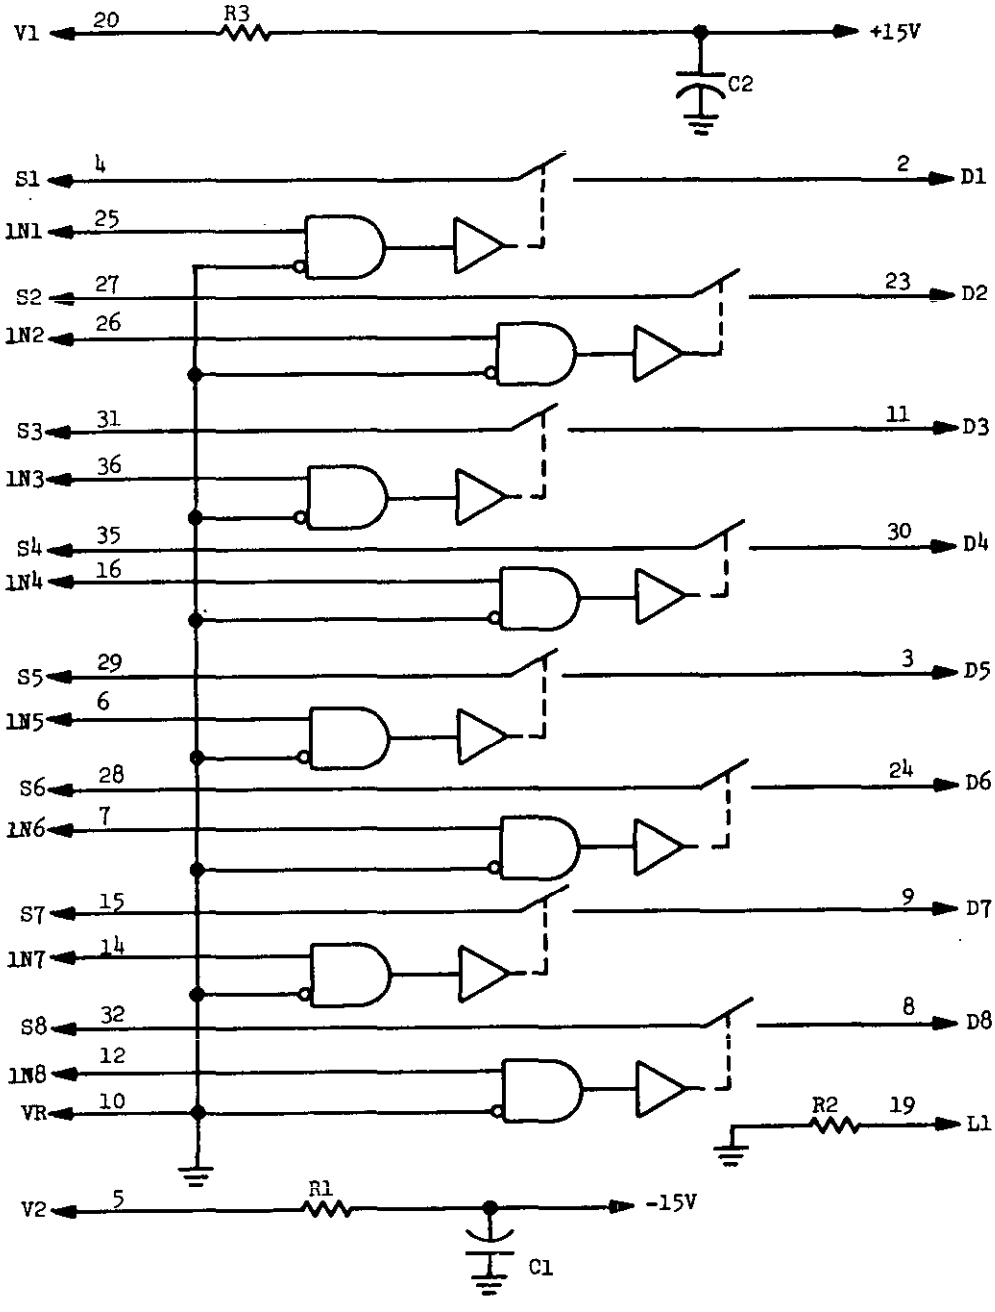

NOTES:
1. R1 = R3 = 100Ω.
2. R2 = 4.7 kΩ.
3. C1 = C2 = 2.2 µF.
4. The following pins are not used and each shall be isolated from all other pins: 1, 13, 17, 18, 21, 22, 33, 34, 37, 38, 39, and 40.

FIGURE 1. TTY module function diagram, analog switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

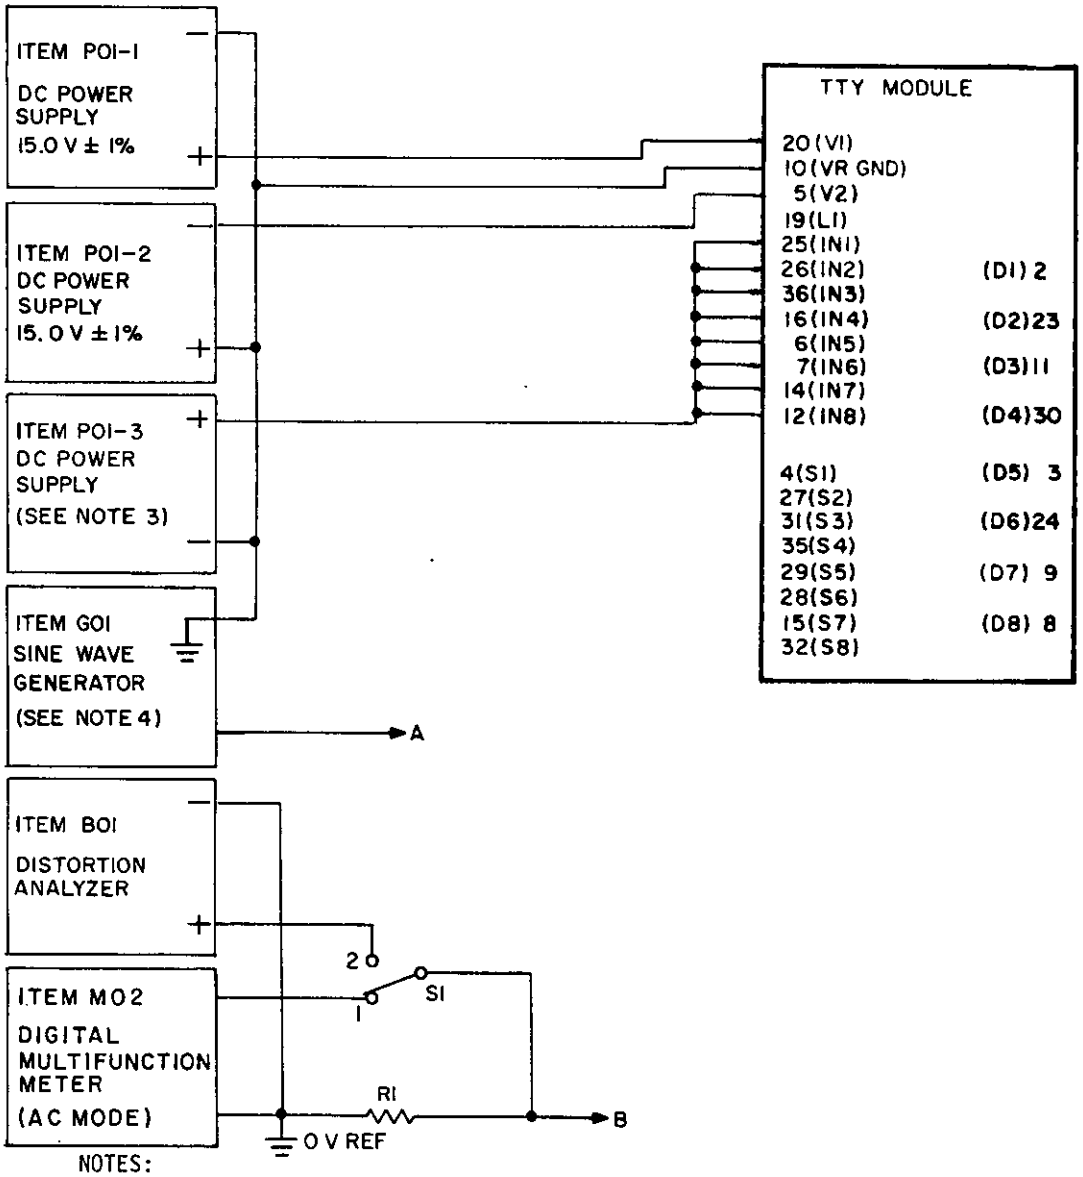

NOTES:
1. R1 = 4.7 kΩ ±1%, 1/10 W.
2. S1 = SPDT switch.
3. Set item POI-3 as follows:

   a. Test conditions C1-C16 at 0.80 ±0.01 V.
   b. Test conditions D1-D16 at 2.41 ±0.01 V.
   c. Test conditions E1-E8 at 2.41 ±0.01 V.

4. Set item GOI as follows:

   a. Test conditions C1-C16 at 5.0 Vrms ±1%, 10 kHz ±1%.
   b. Test conditions D1-D16 at 5.0 Vrms ±1%, 10 kHz ±1%.
   c. Test conditions E1-E8 at 4.0 Vrms ±2%, 10 kHz ±1%.

5. Set switch S1 as follows:

   a. Test conditions C1-C16 at position 1.
   b. Test conditions D1-D16 at position 1.
   c. Test conditions E1-E8 at position 2.

FIGURE 5. Analog switch feed thru and distortion test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

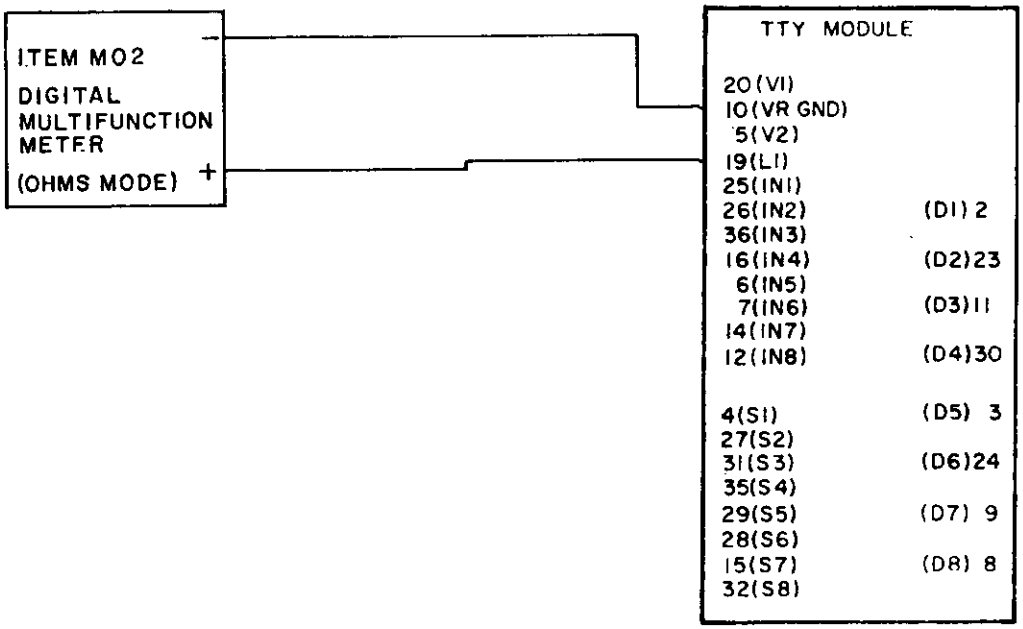


FIGURE 6. Resistance test circuit for table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.


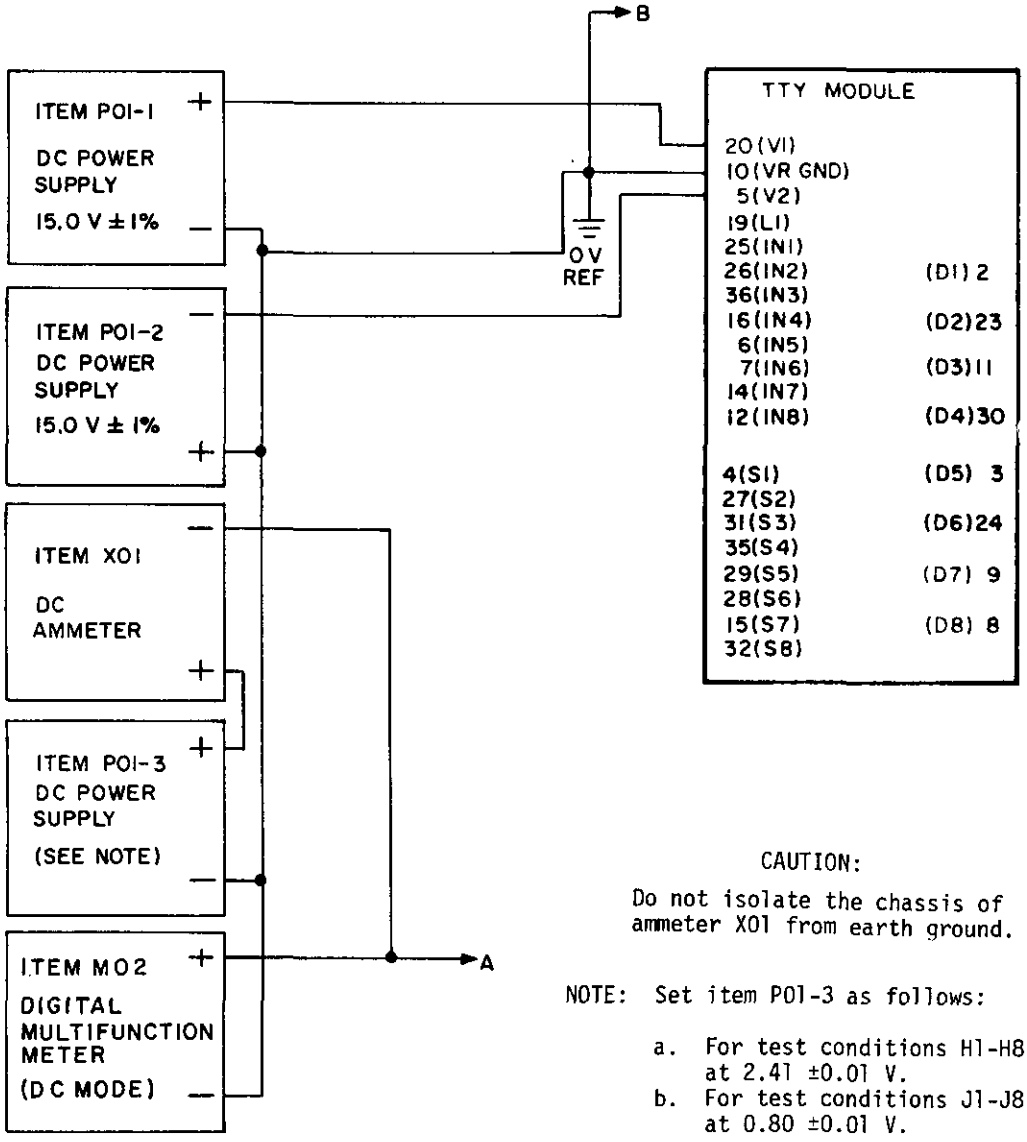


FIGURE 9. Input current test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

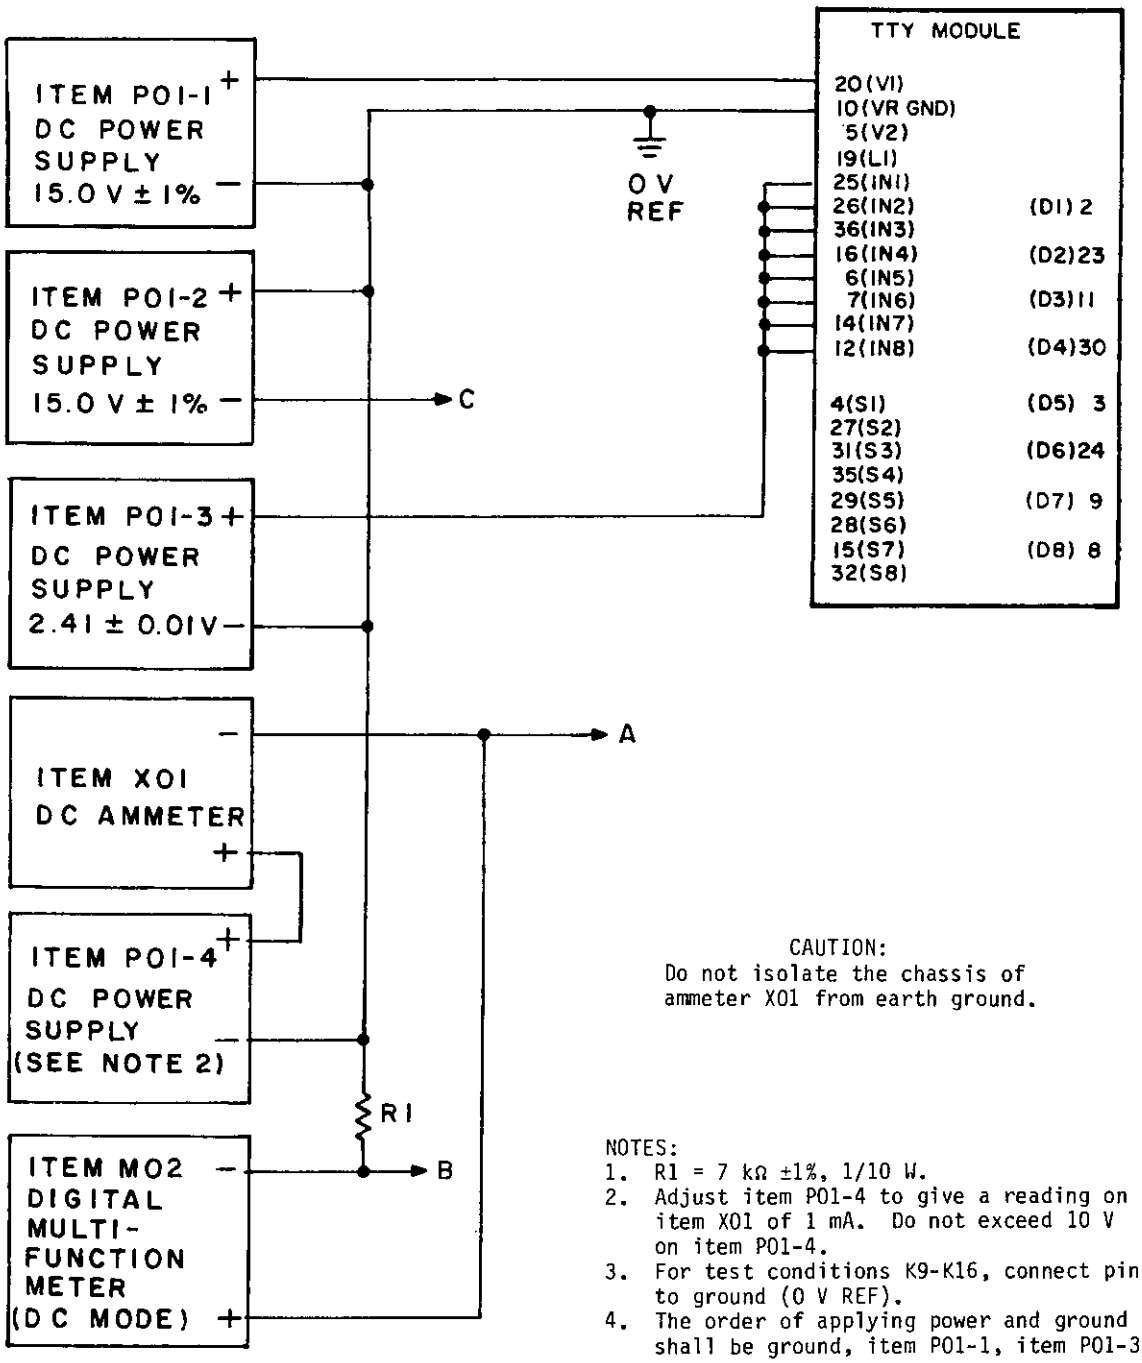

CAUTION:
Do not isolate the chassis of ammeter X01 from earth ground.

NOTES:
1. R1 = 7 kΩ ±1%, 1/10 W.
2. Adjust item P01-4 to give a reading on item X01 of 1 mA. Do not exceed 10 V on item P01-4.
3. For test conditions K9-K16, connect pin 5 to ground (0 V REF).
4. The order of applying power and ground shall be ground, item P01-1, item P01-3.

FIGURE 10. Analog switch "on" resistance test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.