INCH-POUND

MIL-M-28787/57A
AMENDMENT 4
28 April 1993
SUPERSEDING
AMENDMENT 3
3 June 1985

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

SWITCH, ANALOG, ANALOG, KEY CODE TTY

This amendment forms a part of Military Specification MIL-M-28787/57A(EC), dated 25 October 1978, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Bottom of page: Delete "FSC MISC" and substitute "FSC 5963".

PAGE 3

3.5.8, second line: Delete "M28787/57" and substitute "M28787/57-1".

PAGES 3 AND 4

4.3: Delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 5

FIGURE 1: Delete and substitute new figure 1 as printed on page 4 of this amendment.

PAGE 6

*TABLE I, Test condition L3, Delete "40" (two places) and substitute "45" (two places).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

PAGE 7

TABLE I, Test conditions P1-P16, Min columns: Delete "0" (four places) and substitute "-0.1" (four places).

PAGE 8

Add new 6.3 as follows:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/57 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2833417. Part number M28787/57-1 supersedes part numbers 2833417 and M28787/57."

PAGE 17

FIGURE 5: Delete and substitute new figure 5 as printed on page 5 of this amendment.

PAGE 19

FIGURE 6: Delete and substitute new figure 6 as printed on page 6 of this amendment.

PAGE 25

FIGURE 9: Delete and substitute new figure 9 as printed on page 7 of this amendment.

PAGE 27

FIGURE 10: Delete and substitute new figure 10 as printed on page 8 of this amendment.

PAGE 28

*TABLE IX, Test condition L3, Max column: Delete "40" and substitute "45".

PAGE 37

TABLE XII, Min limits column: Delete "0" (two places) and substitute "-0.1" (two places).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0108)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

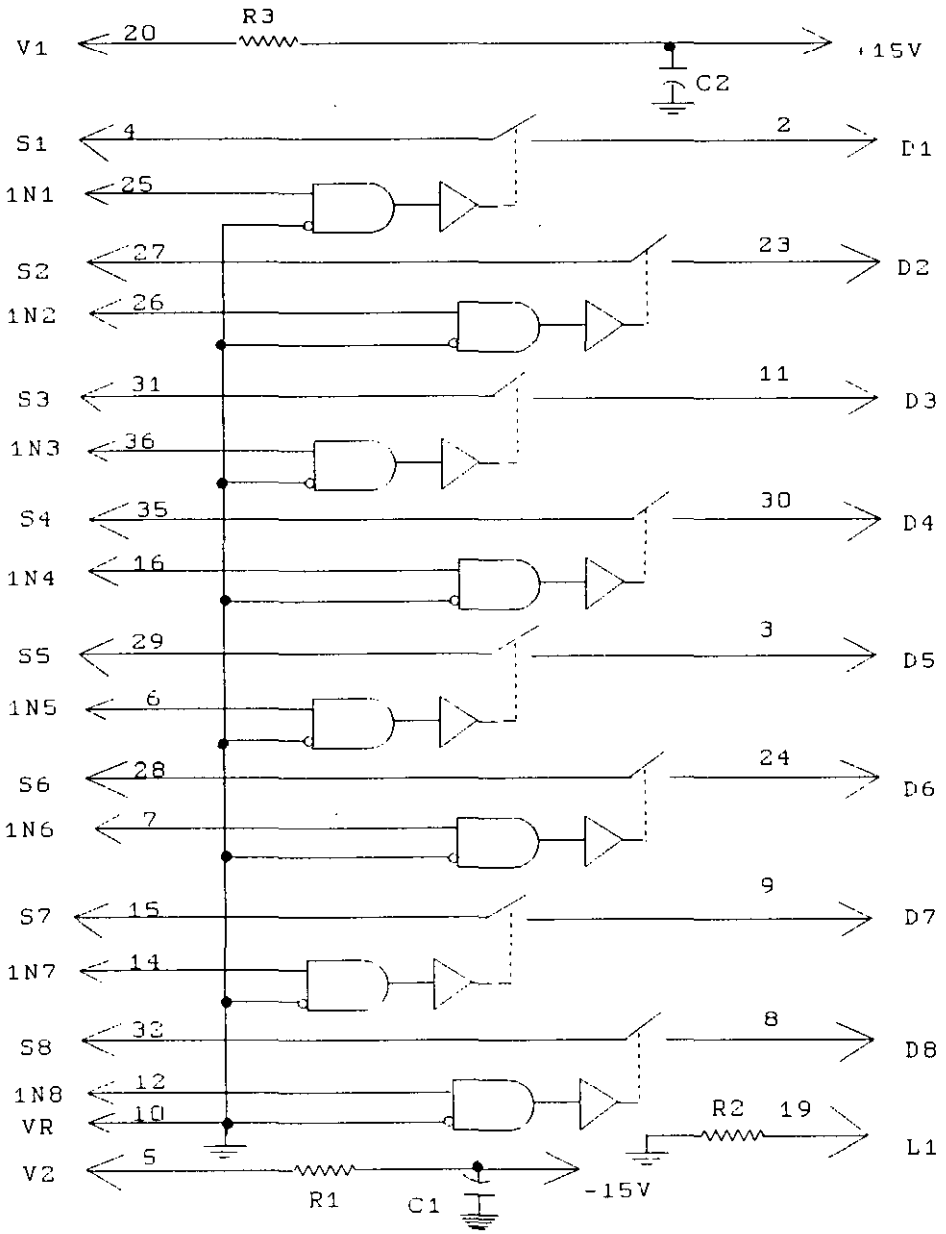


NOTES:

1. R1 = R3 = 100Ω.
2. R2 = 4.7 kΩ.
3. C1 = C2 = 2.2 μF.
4. The following pins are not used and each shall be isolated from all other pins: 1, 13, 17, 18, 21, 22, 33, 34, 37, 38, 39, and 40.

FIGURE 1. TTY module function diagram, analog switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

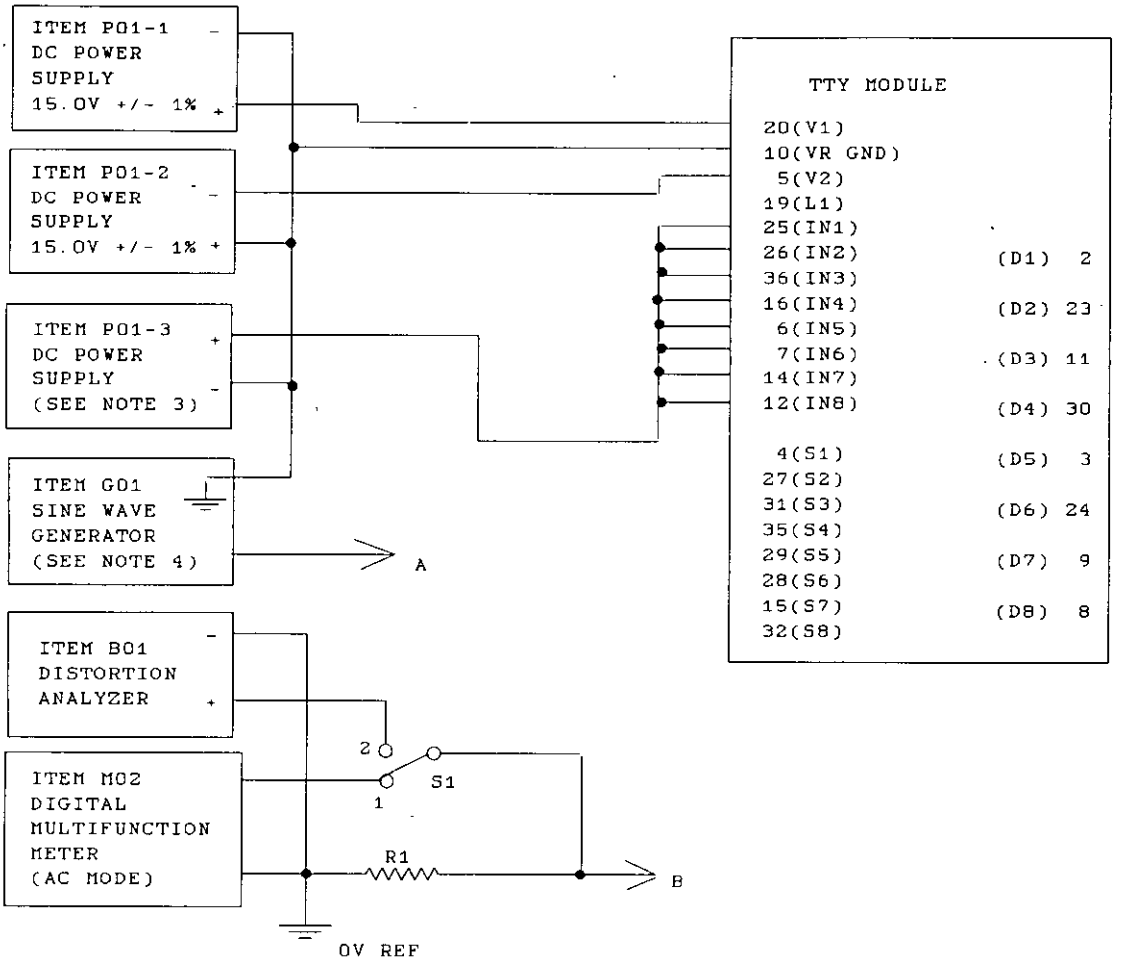

NOTES:

1. R1 = 4.7 kΩ ± 1%, 1/10 W.
2. S1 = SPDT switch.
3. Set item P01-3 as follows:
   a. Test conditions C1-C16 at 0.80 ± 0.01 V.
   b. Test conditions D1-D16 at 2.41 ± 0.01 V.
   c. Test conditions E1-E8 at 2.41 ± 0.01 V.
4. Set item G01 as follows:
   a. Test conditions C1-C16 at 5.0 Vrms ± 1%, 10 kHz ± 1%.
   b. Test conditions D1-D16 at 5.0 Vrms ± 1%, 10 kHz ± 1%.
   c. Test conditions E1-E8 at 4.0 Vrms ± 2%, 10 kHz ± 1%.
5. Set switch S1 as follows:
   a. Test conditions C1-C16 at position 1.
   b. Test conditions D1-D16 at position 1.
   c. Test conditions E1-E8 at position 2.

FIGURE 5. Analog switch feed thru and distortion test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.


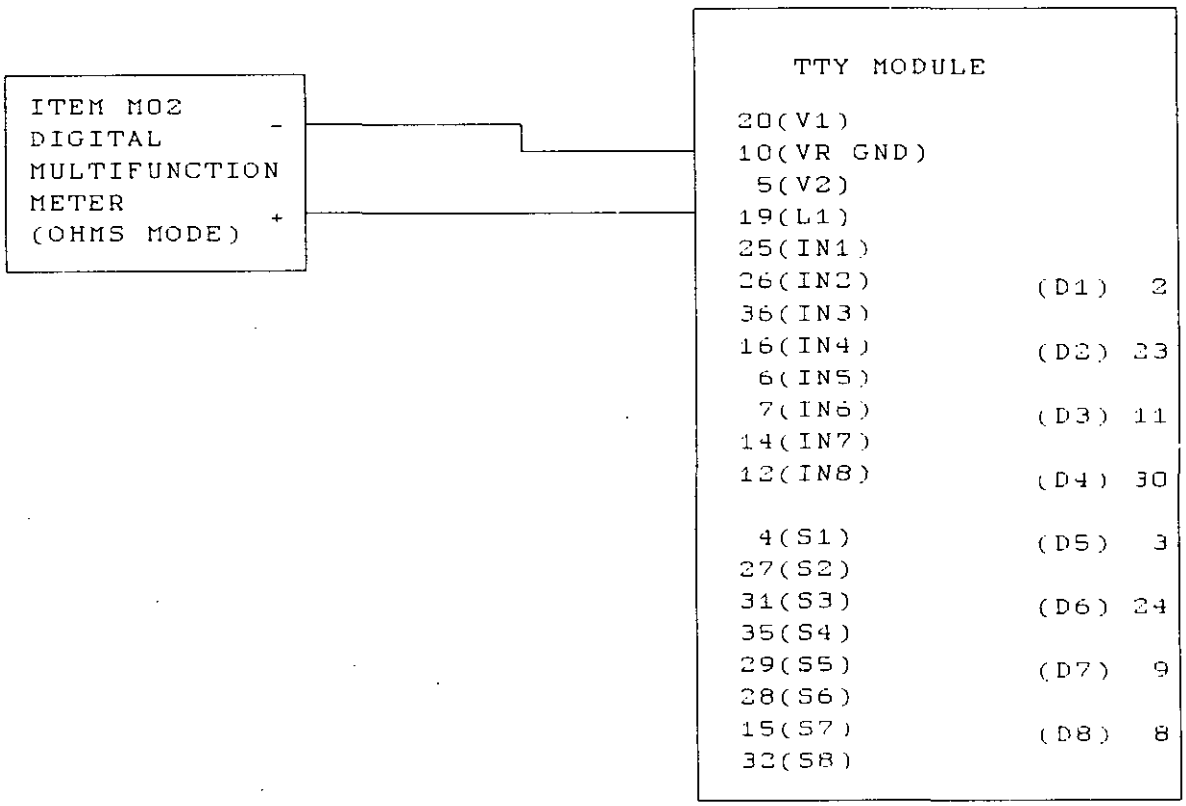


FIGURE 6. Resistance test circuit for table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

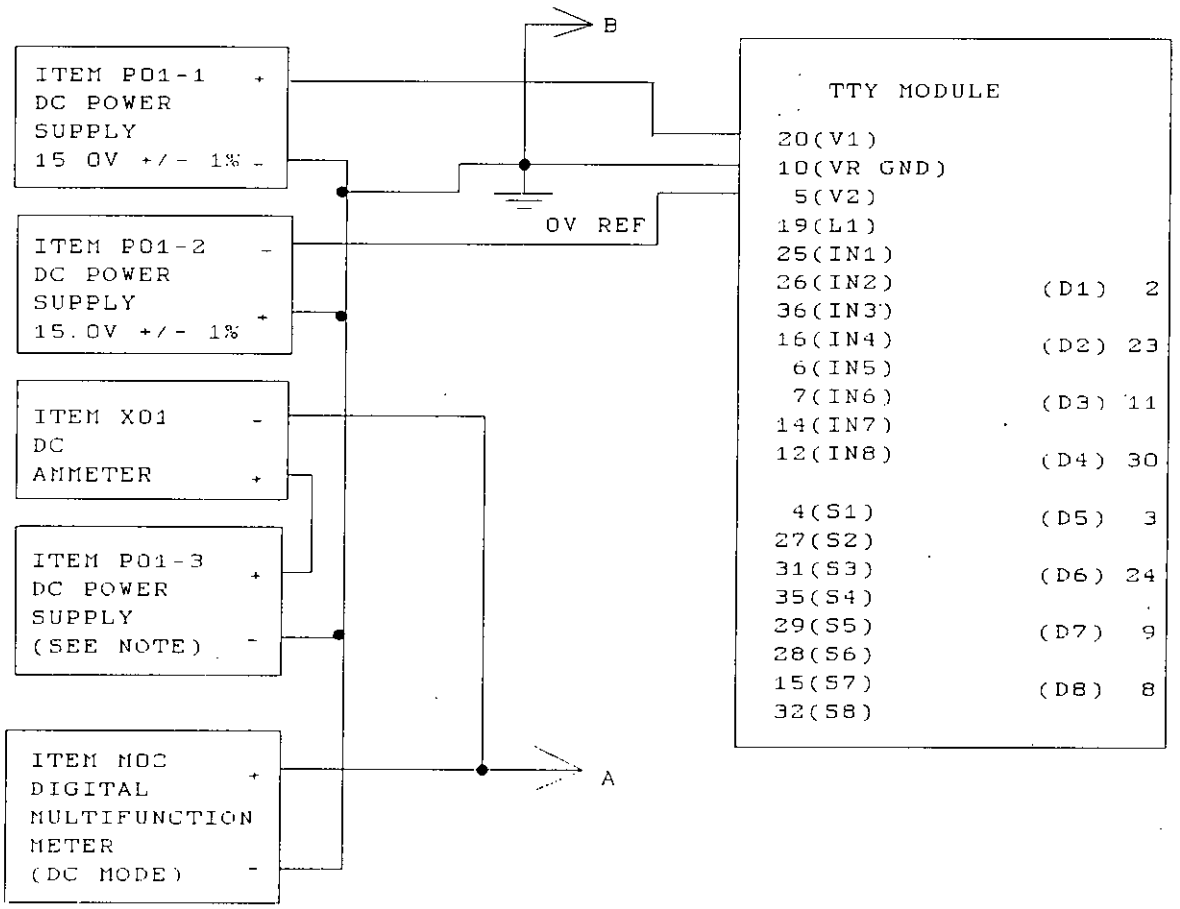


CAUTION:
Do not isolate the chassis of ammeter X01 from earth ground.

NOTE: Set item P01-3 as follows:
a. For test conditions H1-H8 at 2.41 ± 0.01 V.
b. For test conditions J1-J8 at 0.80 ± 0.01 V.

FIGURE 9. Input current test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.

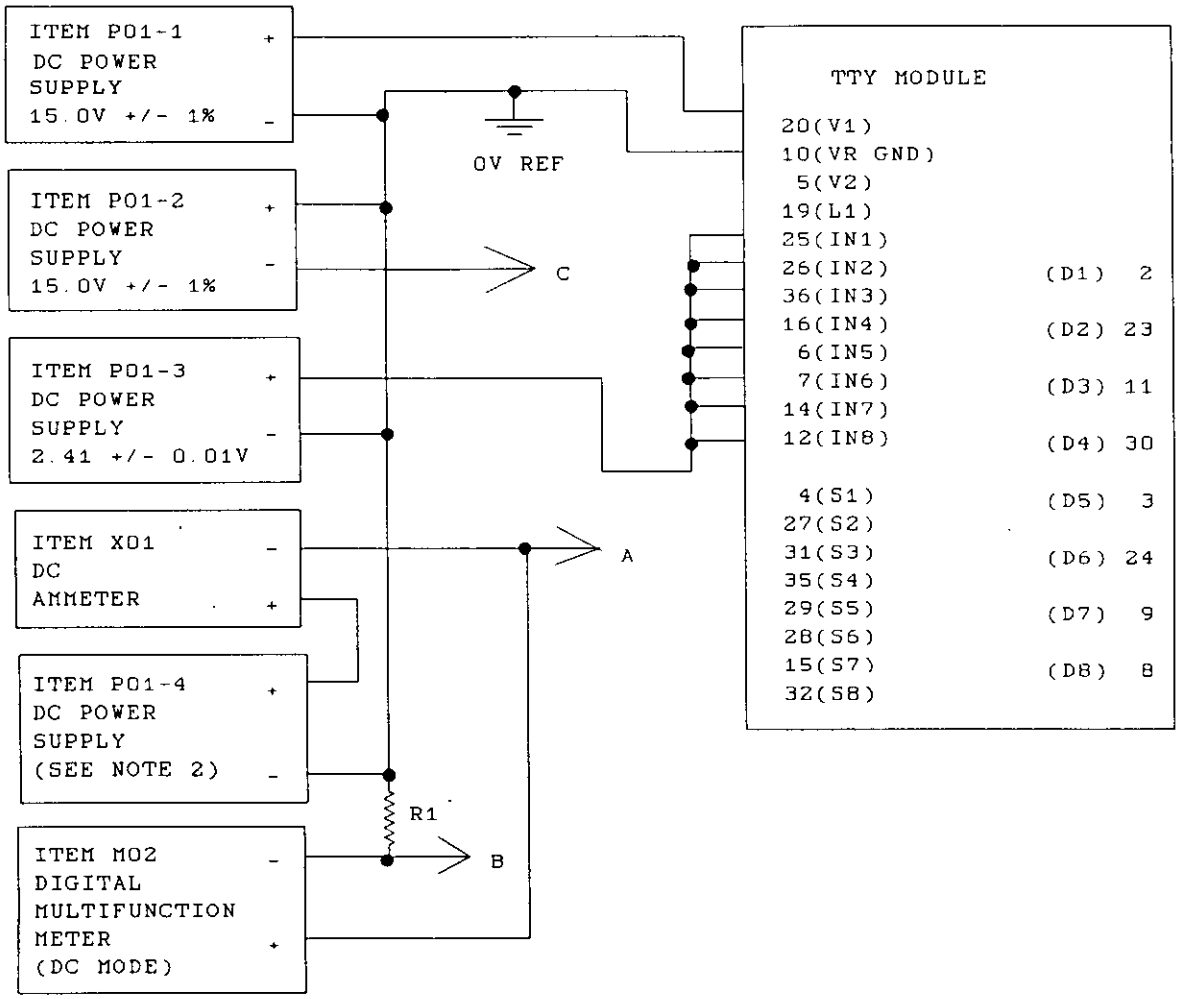

CAUTION:
Do not isolate the chassis of ammeter X01 from earth ground.

NOTES:

1. R1 = 7 kΩ ± 1%, 1/10 W.
2. Adjust item P01-4 to give a reading on item X01 of 1 mA. Do not exceed 10 V on item P01-4.
3. For test conditions K9-K16, connect pin 5 to ground (0 V REF).
4. The order of applying power and ground shall be ground, item P01-1, item P01-3.

FIGURE 10. Analog switch "on" resistance test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:45Z
Check the source to verify that this is the current version before use.