INCH-POUND

MIL-M-28787/61B
AMENDMENT 2
31 December 1992
SUPERSEDING
AMENDMENT 1
13 September 1985

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

FLIP-FLOP, D TYPE, DIGITAL, KEY CODE KDR

This amendment forms a part of Military Specification MIL-M-28787/61B(EC), dated 19 January 1983, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 3

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through Z shall be performed in any order with the following exceptions. Test conditions A, B, C, and J are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, or J are part of a sequence of tests, the order of testing shall be as follows: C, A, B, and J where applicable, followed by the remaining tests in the sequence."

*4.5.1, line 5: Delete "E through W" and substitute "E through H, K through W".

*4.5.3, line 3: Delete "E through W" and substitute "E through H, K through W".

*4.5.3, line 6: Delete "C through Z" and substitute "D through H and K through Z".

PAGE 5

*TABLE I, Test conditions J1-J12, Test type column: Delete "X" and substitute "S".

*TABLE I, Test conditions J13 and J14, Test type column: Delete "X" and substitute "S".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-20T15:47Z
Check the source to verify that this is the current version before use.

PAGE 45

FIGURE 16, Note 1: Delete "PWB = 150 ns ± 10%." and substitute "PWB = 250 ns ± 10%."

PAGE 50

FIGURE 18, Note 1: Delete "PWA = 200 ns ± 10%." and substitute "PWA = 250 ns ± 10%".

PAGE 54

FIGURE 22: Delete and substitute new figure 22 as printed on page 3 of this amendment.

PAGE 64

FIGURE 28: Delete and substitute new figure 28 as printed on page 4 of this amendment.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Preparing activity:
Navy - NW

(Project 5963-0110)

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:47Z
Check the source to verify that this is the current version before use.

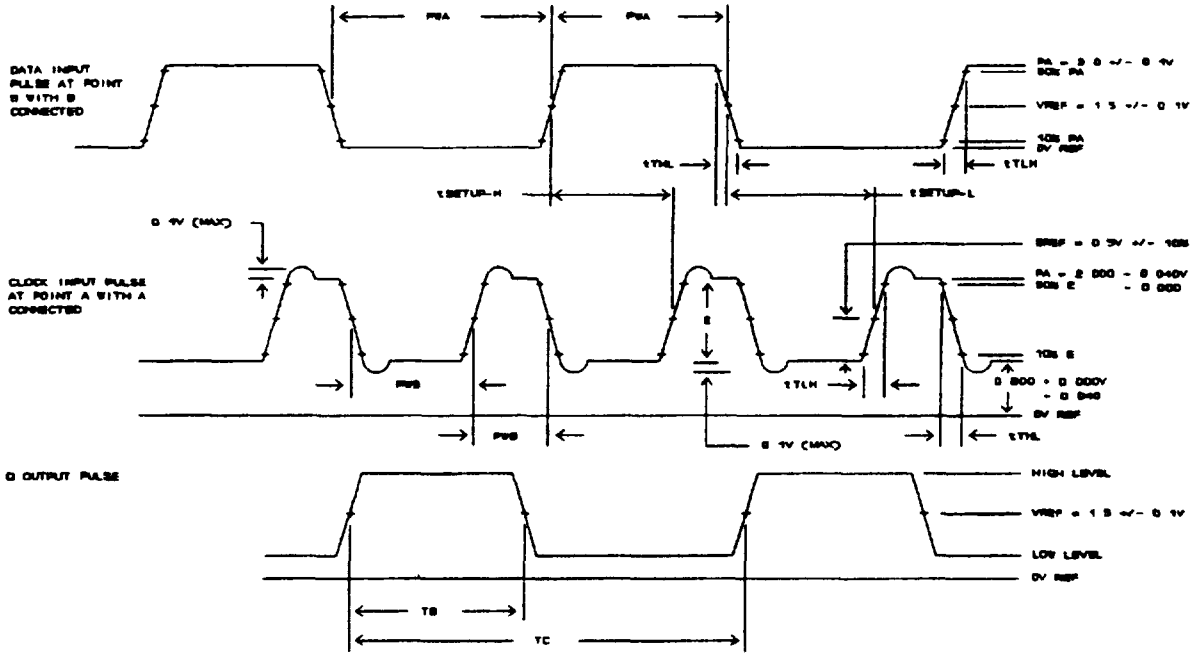


Notes:

1. Input pulse parameters:
   PWA = 500 ns ± 10%.
   PWB = 250 ns ± 10%.
   tTLH = tTHL = 25 ns ± 10%.
   tSETUP-H = tSETUP-L = 125 ns ± 10%.
2. Both outputs of the circuit under test shall be loaded simultaneously.
3. Parameters TB and TC as measured on item D05 shall comply with electrical requirements of test conditions U1-U6 and shall be measured per waveforms above. Before making these measurements, the output levels shall be verified to be $\leq$ 0.4 V for the low level and $\geq$ 2.4 V for the high level.

FIGURE 22. Threshold clock test circuit waveforms for table XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:47Z
Check the source to verify that this is the current version before use.

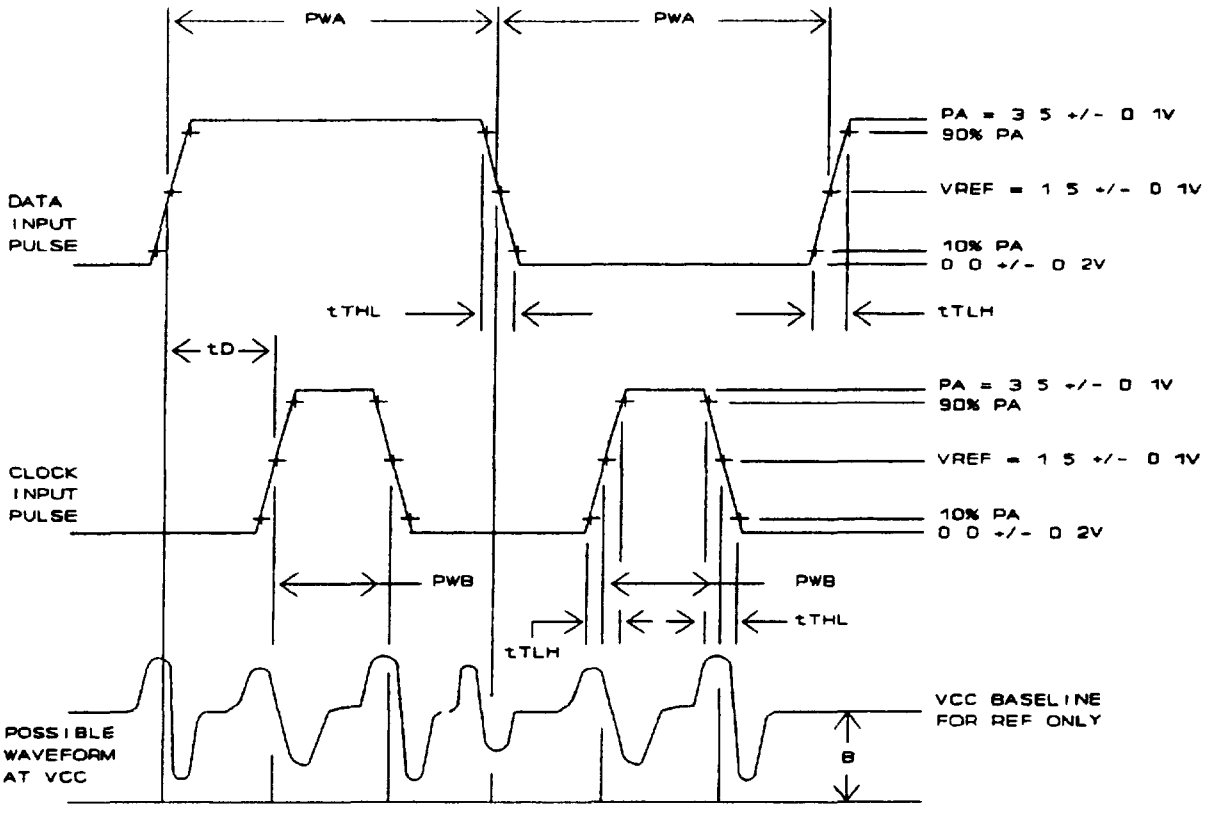

NOTES:

1. Input pulse parameters:
   PWA = 500 ns ± 10%.
   PWB = 100 ns ± 10%.
   PRR (Clock) = 2 MHz ± 10%.
   tTLH = tTHL = 10 ± 1 ns.
   tD = 200 ns ± 10%.
2. Connect point A as close as possible to pin 1 on the module. Observe power supply transient on item D05; typical waveforms are shown above.
3. B = measurement from the baseline to the most negative excursion of the waveform.

FIGURE 28. Power supply transient amplitude test circuit waveforms for table XX.

Source: https://assist.dla.mil -- Downloaded: 202610-20T15:47Z
Check the source to verify that this is the current version before use.