MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

GATE, AND-OR-INVERT, DIGITAL, KEY CODE LHJ

This amendment forms a part of Military Specification MIL-M-28787/64A(EC), dated 1 May 1980, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGES 5 AND 6

4.3, delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 10

* TABLE II, Test condition X1-X24, Max columns: Delete "15.0" (four places) and substitute "20.0" (four places).

PAGE 18

FIGURE 6: Delete and substitute new figure 6 as printed on page 3 of this amendment.

PAGE 29

FIGURE 10: Delete and substitute new figure 10 as printed on page 4 of this amendment.

PAGE 38

FIGURE 11: Delete and substitute new figure 11 as printed on page 5 of this amendment.

PAGE 42

TABLE X, footnote 2, second line: Delete "(V03)" and substitute "M02".

PAGE 43

FIGURE 13: Delete and substitute new figure 13 as printed on page 6 of this amendment.

PAGE 77

TABLE XVII, Test conditions T16, T17, and T18, B to pin column: Insert "6, 26," (three places) between 31 and 16.

PAGE 78

TABLE XVII, Test condition U2, B to pin column: Delete "16" and substitute "26".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.

PAGE 87

* TABLE XX, Test conditons X1 through X24, Max column: Delete "15.0" (two places) and substitute "20.0" (two places).


NOTE: The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the maginal notations and relationship to the last previous amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N623)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.

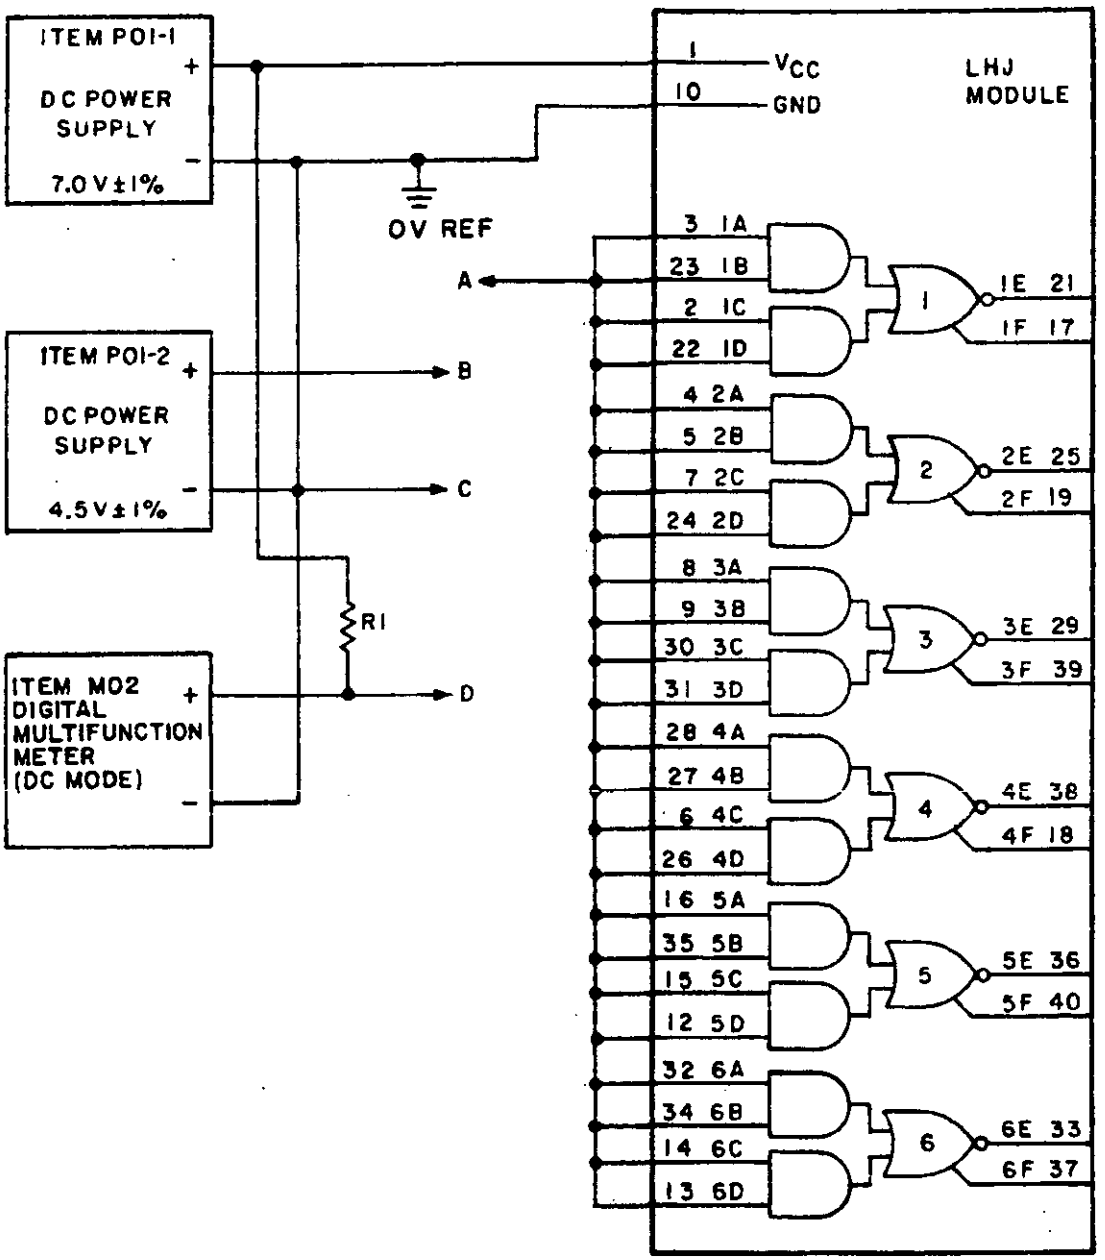

NOTE: R1 = 249Ω ±1%, 1/4 W.

FIGURE 6. V_{OUT} (low-loaded) test circuit for table IV.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.

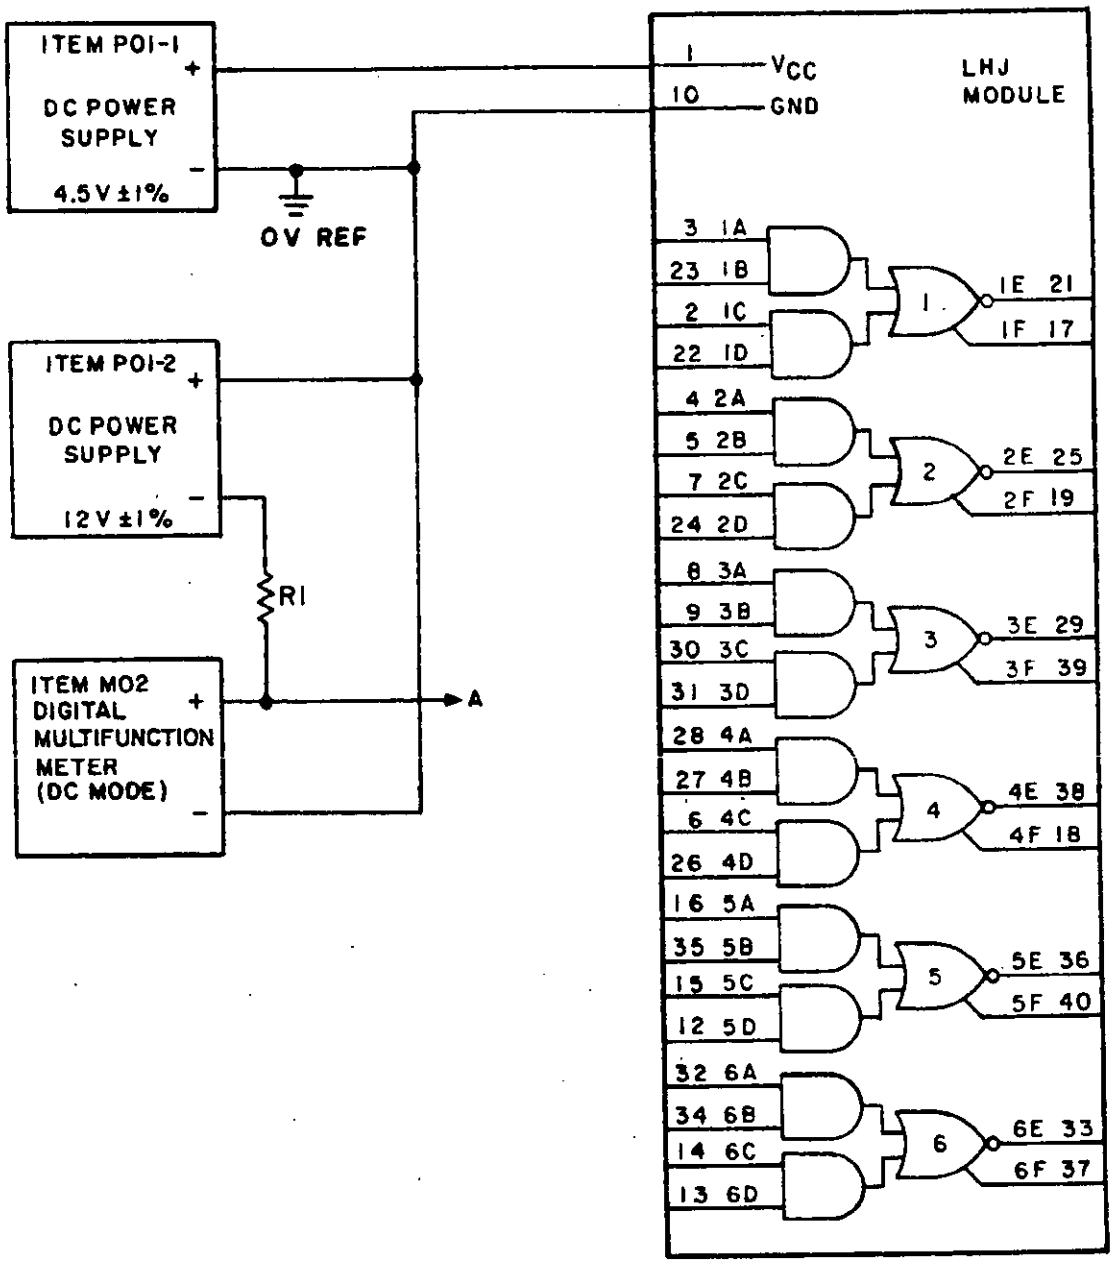

NOTE: R1 = 590Ω ±1%, 1/4 W.

FIGURE 10. Input clamp diode voltage test circuit for table VIII.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.

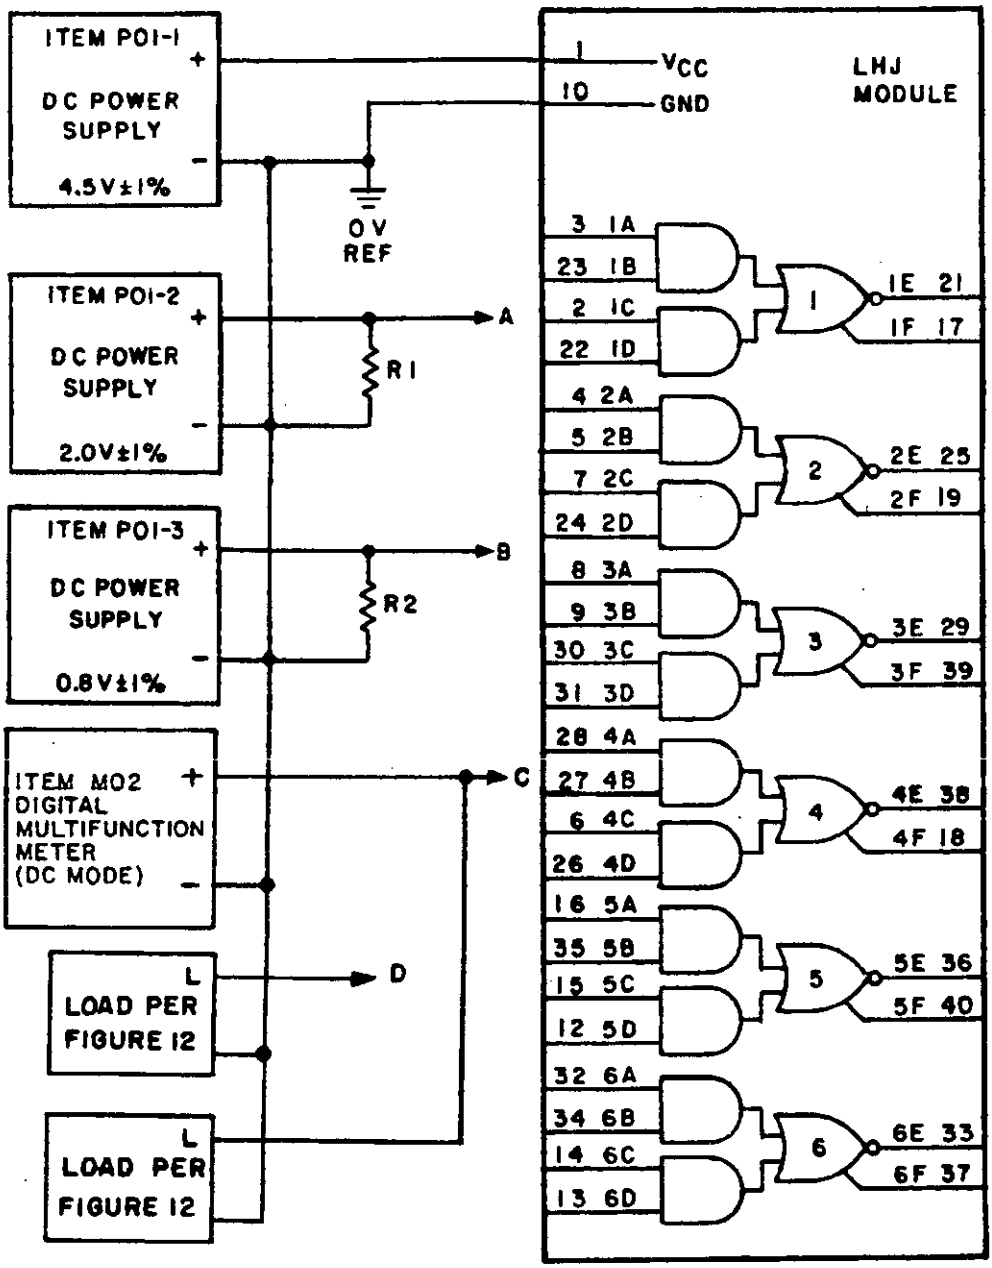

NOTES:
1. R1 = R2 = 51Ω ±5%, 1/2 W.
2. Both outputs of the circuit under test shall be loaded simultaneously per figure 12.

FIGURE 11. Static output voltage (high-level and low-level) test circuit for table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.

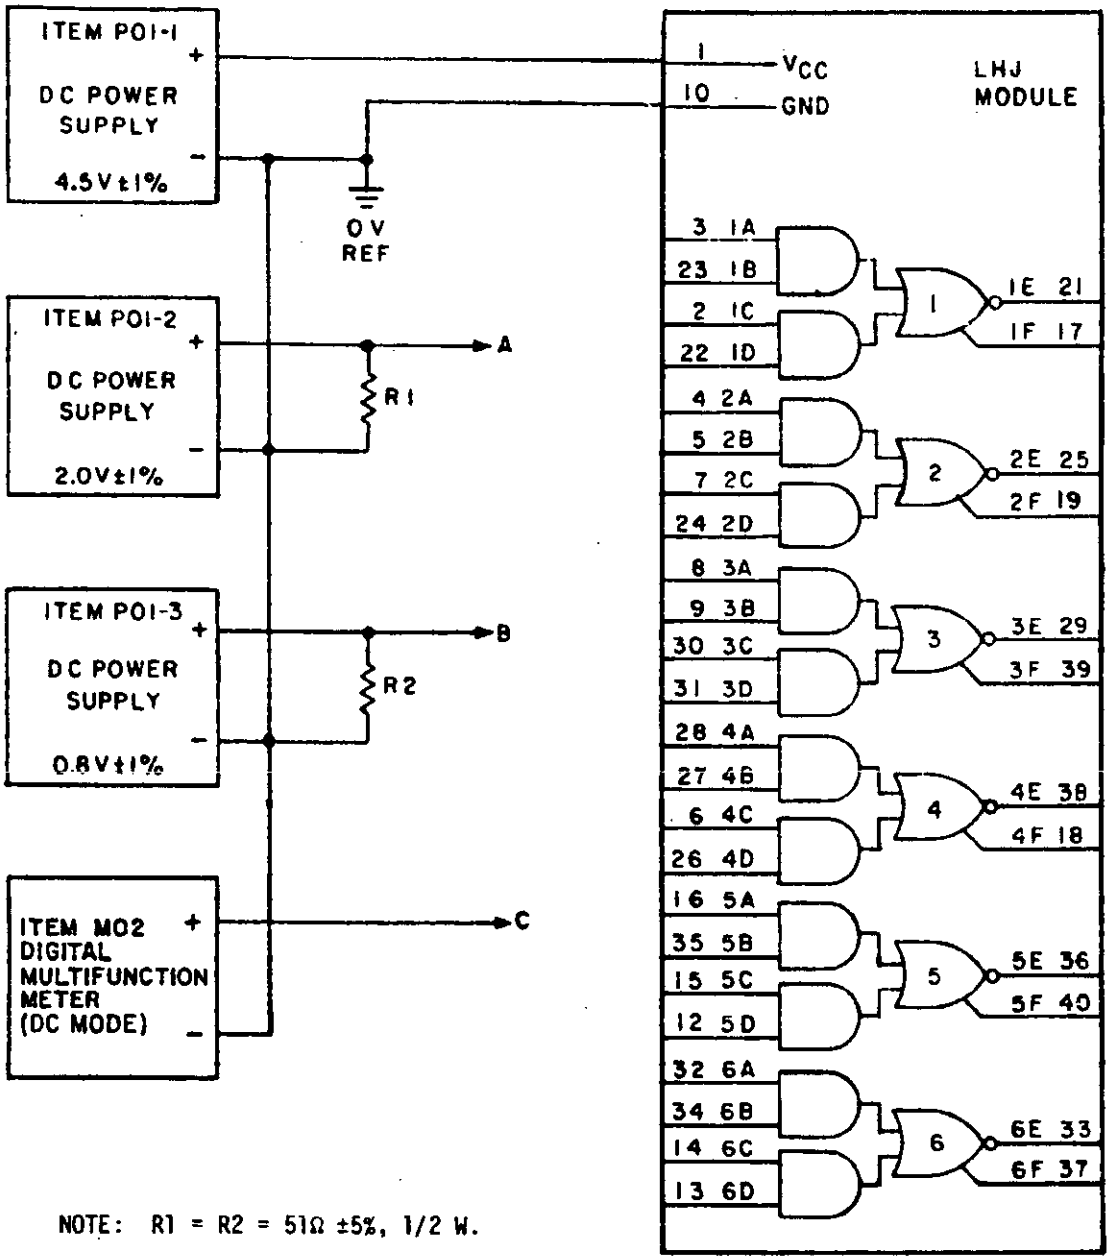

NOTE: R1 = R2 = 51Ω ±5%, 1/2 W.

FIGURE 13. Functional test circuit for table X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.