INCH-POUND

MIL-M-28787/64A
AMENDMENT 3
31 December 1992
SUPERSEDING
AMENDMENT 2
14 August 1984

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

GATE, AND-OR-INVERT, DIGITAL, KEY CODE LHJ

This amendment forms a part of Military Specification MIL-M-28787/64A(EC), dated 1 May 1980, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGES 5 AND 6

4.3: Delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 6

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through X shall be performed in any order with the following exceptions. Test conditions A, B, C, D, E, F, and N are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, D, E, F, or N are part of a sequence of tests, the order of testing shall be as follows: A, N, B, C, D, E, and F where applicable, followed by the remaining tests in the sequence."

*4.5.1, line 5: Delete "D through W (except N)" and substitute "G through M, and P through W".


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.

PAGE 8

*TABLE II, Test conditions D1-D12, Test type column: Delete "X" and substitute "S".

*TABLE II, Test conditions E1-E6 and E7-E12, Test type column: Delete "X" and substitute "S".

*TABLE II, Test conditions F1-F24, Test type column: Delete "X" and substitute "S".

PAGE 10

TABLE II, Test conditions X1-X24, Max columns: Delete "15.0" (four places) and substitute "20.0" (four places).

PAGE 11

*4.5.3, line 3: Delete "D through W" and substitute "G through M, and P through W".

*4.5.3, lines 5 and 6: Delete "D through X (except N)" and substitute "G through M, and P through X".

PAGE 18

FIGURE 6: Delete and substitute new figure 6 as printed on page 4 of this amendment.

PAGE 29

FIGURE 10: Delete and substitute new figure 10 as printed on page 5 of this amendment.

PAGE 38

FIGURE 11: Delete and substitute new figure 11 as printed on page 6 of this amendment.

PAGE 42

TABLE X, footnote 2, second line: Delete "(V03)" and substitute "M02".

PAGE 43

FIGURE 13: Delete and substitute new figure 13 as printed on page 7 of this amendment.



Source: https://assist.dla.mil -- Downloaded: 202640-20T15:48Z
Check the source to verify that this is the current version before use.

PAGE 55

*FIGURE 17, ITEM R06 box: Delete "100 V dc±10%" and substitute "30 Vdc ± 10%".

PAGE 77

TABLE XVII, Test conditions T16, T17, and T18, B to pin column: Insert "6, 26," (three places) between 31 and 16.

PAGE 78

TABLE XVII, Test condition U2, B to pin column: Delete "16" and substitute "26".

PAGE 87

TABLE XX, Test conditions X1 through X24, Max column: Delete "15.0" (two places) and substitute "20.0" (two places).

PAGE 88

FIGURE 25, ITEM C01 box: Delete "C01" and substitute "C06".

FIGURE 25, NOTE 3, first line: Delete "(C01)" and substitute "(C06)".

FIGURE 25, NOTE 3, third line: Delete "Frequency = 120 Hz." and substitute "Frequency = 1 KHz."

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - SH
Air Force - 85


Preparing activity:
Navy - NW

(Project 5963-0112)

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.

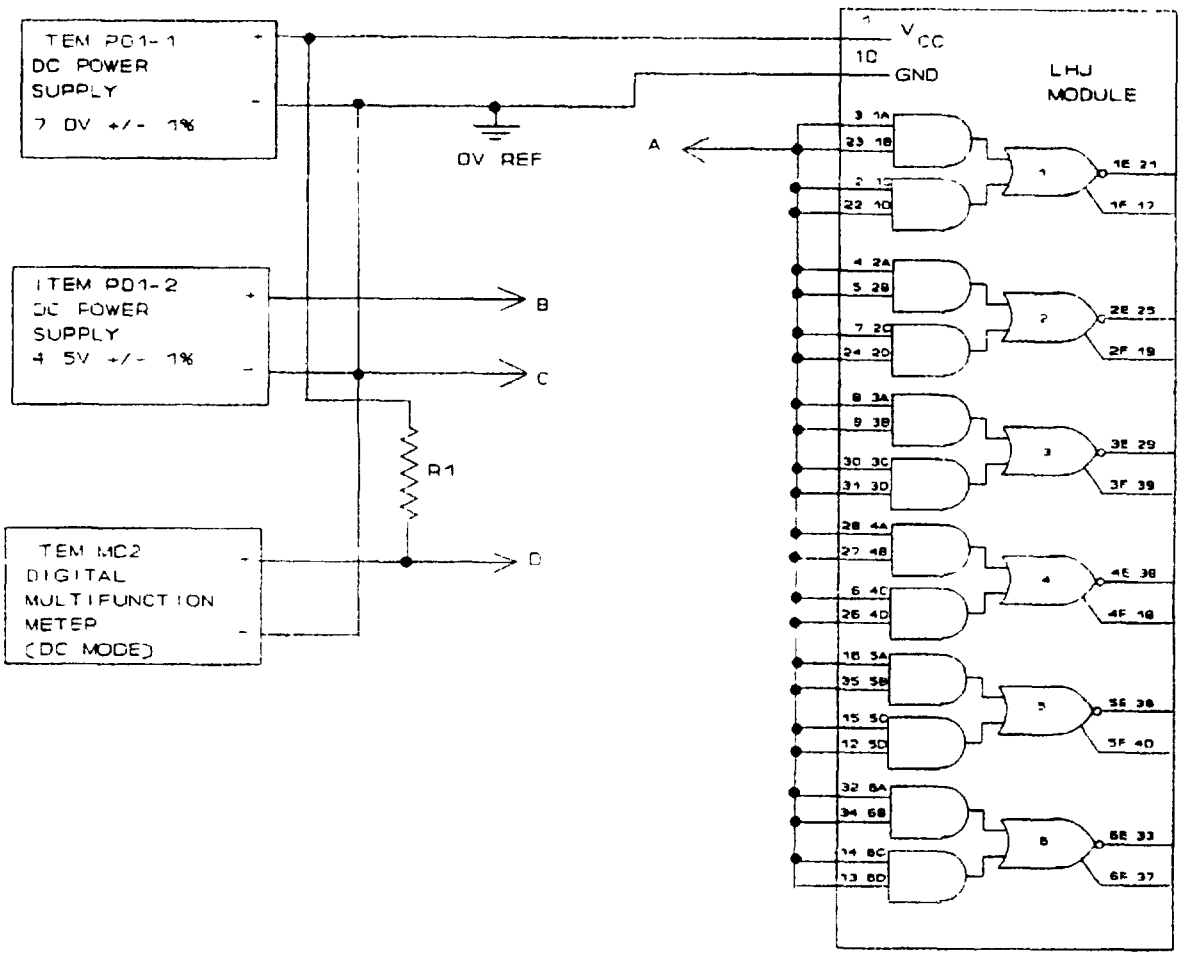



NOTE: R1 = 249Ω ± 1%, 1/4 W.

FIGURE 6. $V_{OUT}$ (low-loaded) test circuit for table IV.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.

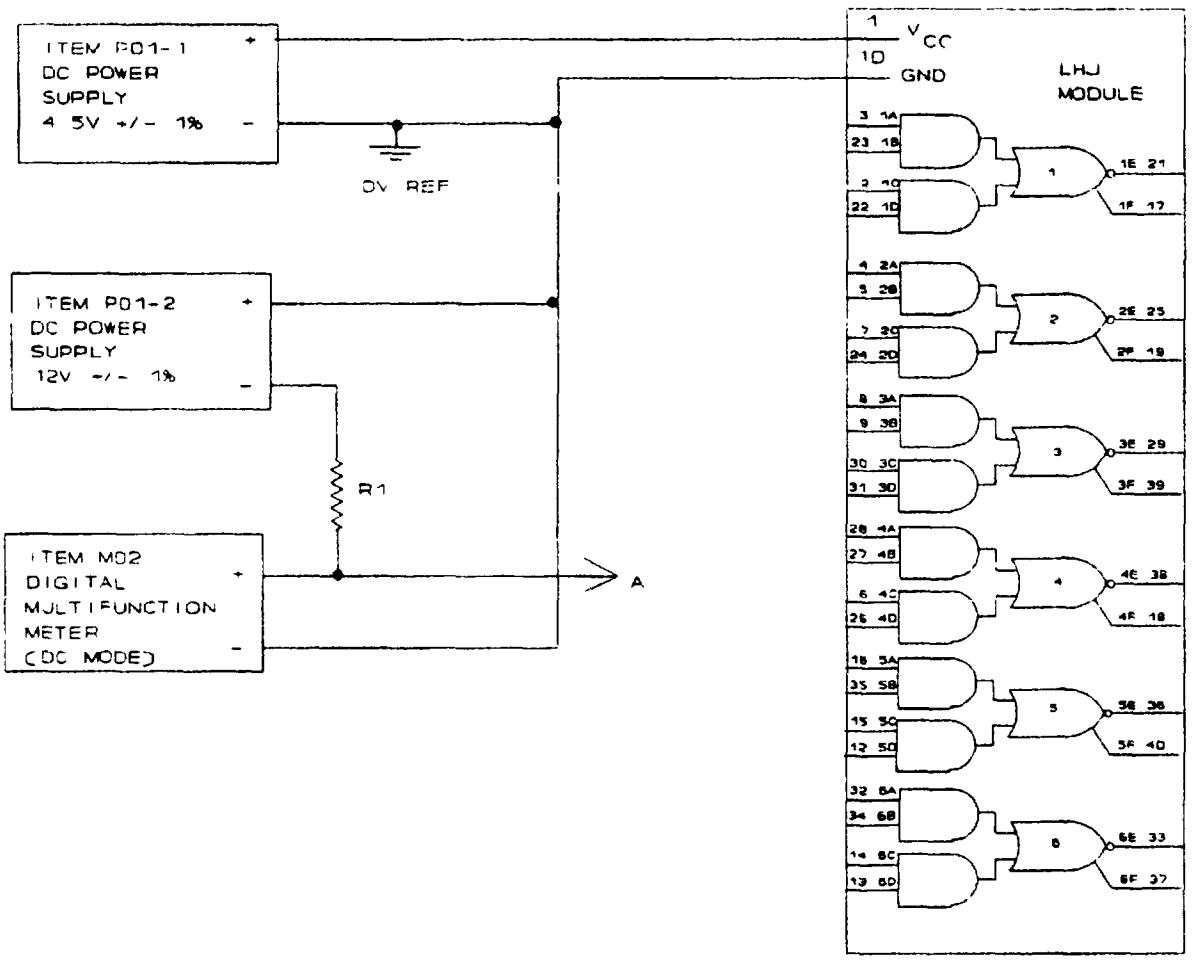



NOTE: R1 = 590Ω ± 1%, 1/4 W.

FIGURE 10. Input clamp diode voltage test circuit for table VIII.



Source: https://assist.dla.mil -- Downloaded: 202640-20T15:48Z
Check the source to verify that this is the current version before use.

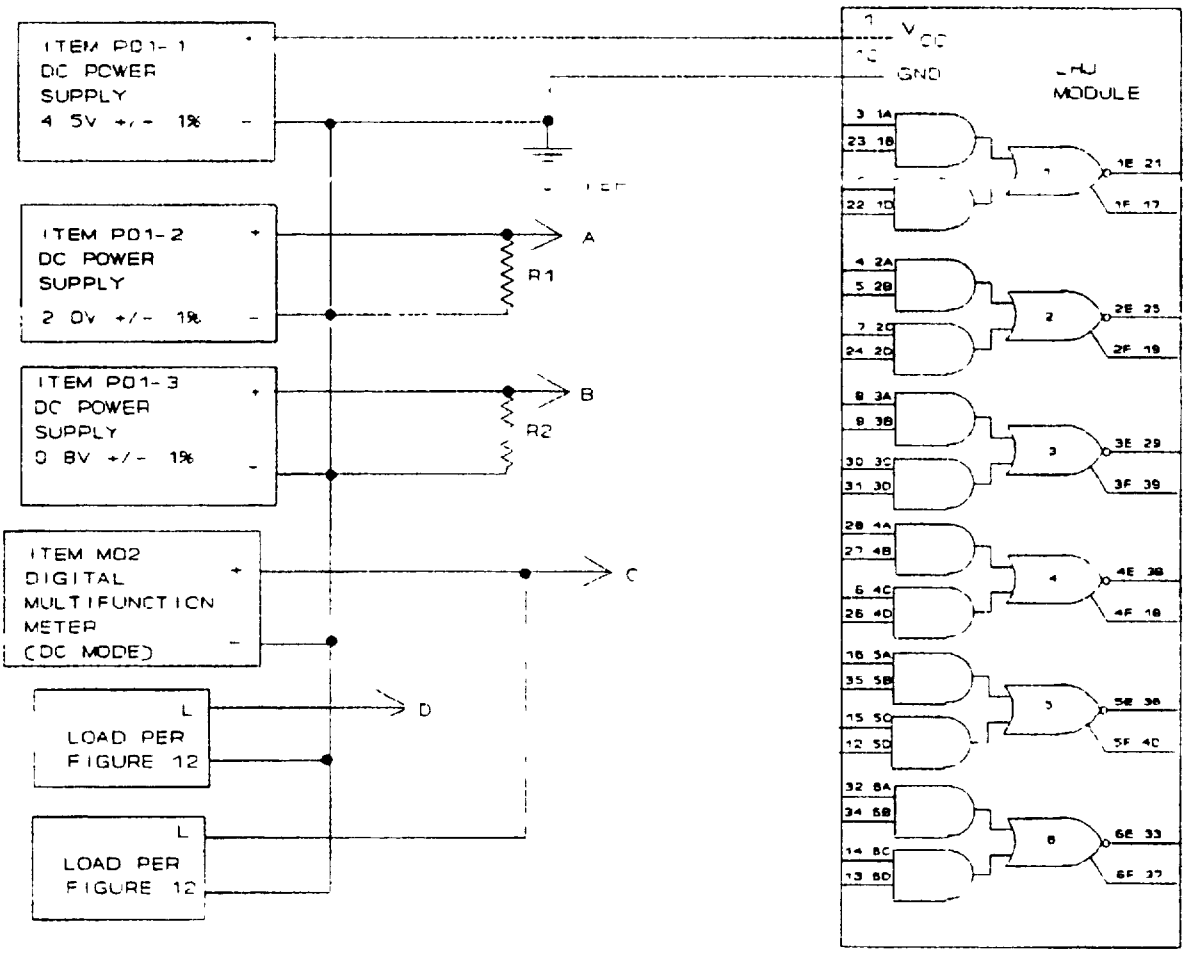



**NOTES:**

1. R1 = R2 = 51Ω ± 5%, 1/2 W.
2. Both outputs of the circuit under test shall be loaded simultaneously per figure 12.

FIGURE 11. Static output voltage (high-level and low-level) test circuit for table IX.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.

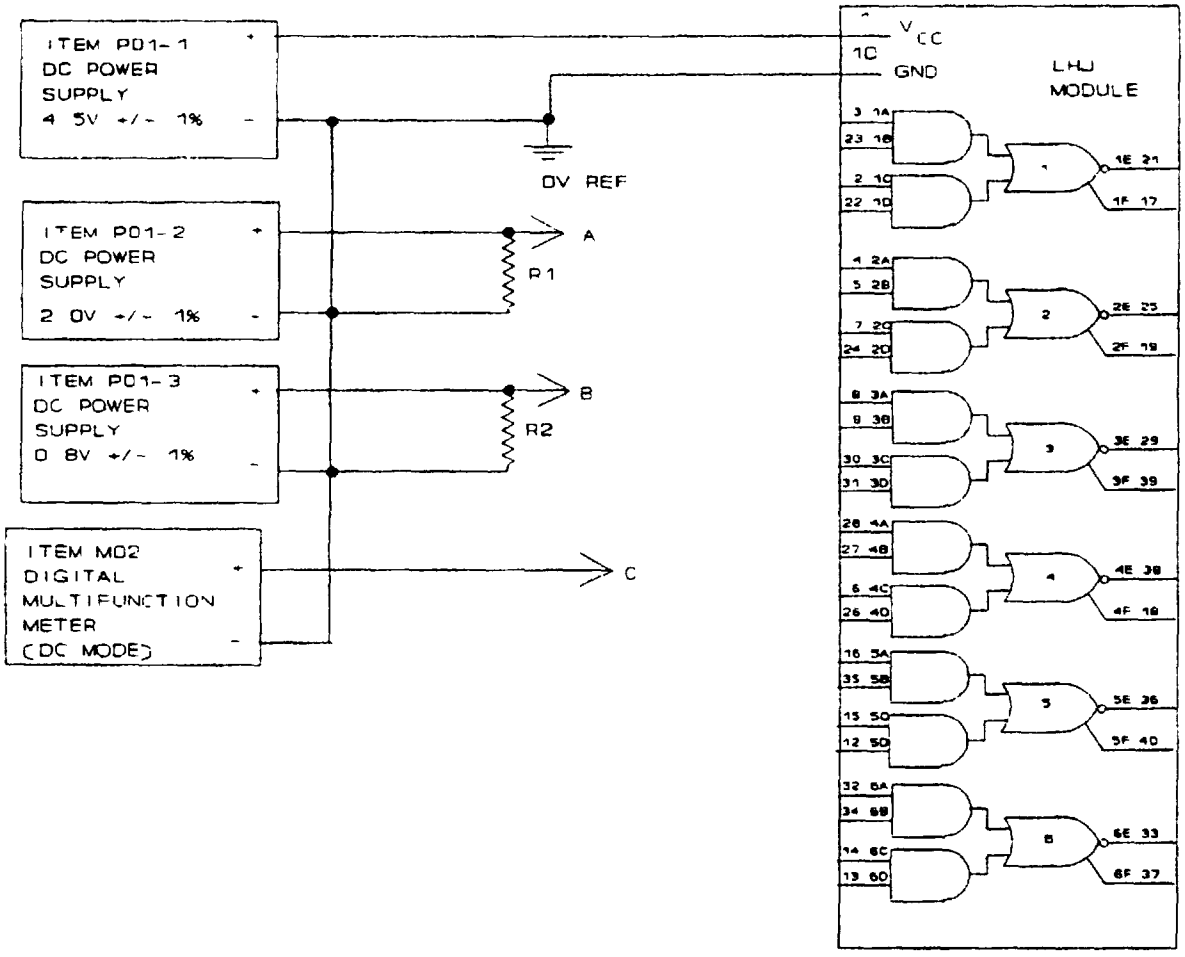


NOTE: R1 = R2 = 51Ω ± 5%, 1/2 W.

FIGURE 13. Functional test circuit for table X.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:48Z
Check the source to verify that this is the current version before use.