MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

SHIFT REGISTER, DIGITAL, KEY CODE CHF

This amendment forms a part of MIL-M-28787/71C(EC), dated 9 September 1982, and is approved for use within the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

* TABLE I, Test conditions H1-H16, Max columns: Delete "500" (four places) and substitute "400" (four places).

PAGE 7

* 4.4.2, delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through AA shall be performed in any order with the following exceptions. Test conditions A, B, C, D, and G are stress tests and will be performed only at 25°C ±5°C. If test conditions A, B, C, D, or G are part of a sequence of tests, the order of testing shall be as follows: A, B, C, D, G where applicable, followed by the remaining tests in the sequence."

4.5.1, third line: Delete "A through Z" and substitute "A through AA".

4.5.1, fifth line: Delete "D through Y" and substitute "E, F, H through Y and AA".

4.5.3, third line: Delete "D through Y" and substitute "E, F, H through Y and AA".

4.5.3, sixth line: Delete "D through Z" and substitute "E, F, H through AA".

* 6.4, Maximum power dissipation: Delete "440" and substitute "506".

PAGE 8

* 6.4, Input current, P1-P16, R, L: Low level (V_{IL} = 0.0 V): Delete "-0.43" and substitute "-0.51".

* 6.4, Input current, P1-P16, R, L: Low level (V_{IL} = 0.4 V): Delete "-0.36" and substitute "-0.44".

* 6.4, Input current, S0, S1, CLR: Low level (V_{IL} = 0.0 V): Delete "-1.58" and substitute "-1.94".

* 6.4, Input current, S0, S1, CLR: Low level (V_{IL} = 0.4 V): Delete "-1.44" and substitute "-1.76".

* 6.4, Output voltage, Low level: Delete "6" and substitute "4" and delete "0.5" and substitute "0.4".

* 6.4, Output drive current maximum capability, Low level: Delete "0.5" and substitute "0.4" and delete "6" and substitute "4".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:53Z
Check the source to verify that this is the current version before use.

PAGE 44

* TABLE X, Test conditions H1-H16, Max limits column: Delete "500" and substitute "400".

PAGE 50

* FIGURE 17, NOTE 2: Delete "6" and substitute "4" and delete "0.5" and substitute "0.4".

PAGE 112

* FIGURE 41, NOTES: Delete notes 3 and 4 and add the following new tests:


"3. Item J01-3 pulse parameters for test conditions AA1-AA16:
PRP3 = 1000 ±100 ns.
PWC = 25 ±2 ns.
$t_{TLH3} = T_{THL3}$ = 6 ±2 ns.

4. Item J01-3 pulse parameters for test conditions AA17-AA48:
PRP3 = 1000 ±100 ns.
PWC = 30 ± 2 ns.
$t_{TLH3} = t_{THL3}$ = 6 ±2 ns.

5. Sweep the item J01-3 pulse through one cycle. The output pulse at point B shall meet the requirements of table XXVI (test conditons AA1-AA48)."

* Following figure 41, add new figure 42 as printed on page 3 of this amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:53Z
Check the source to verify that this is the current version before use.

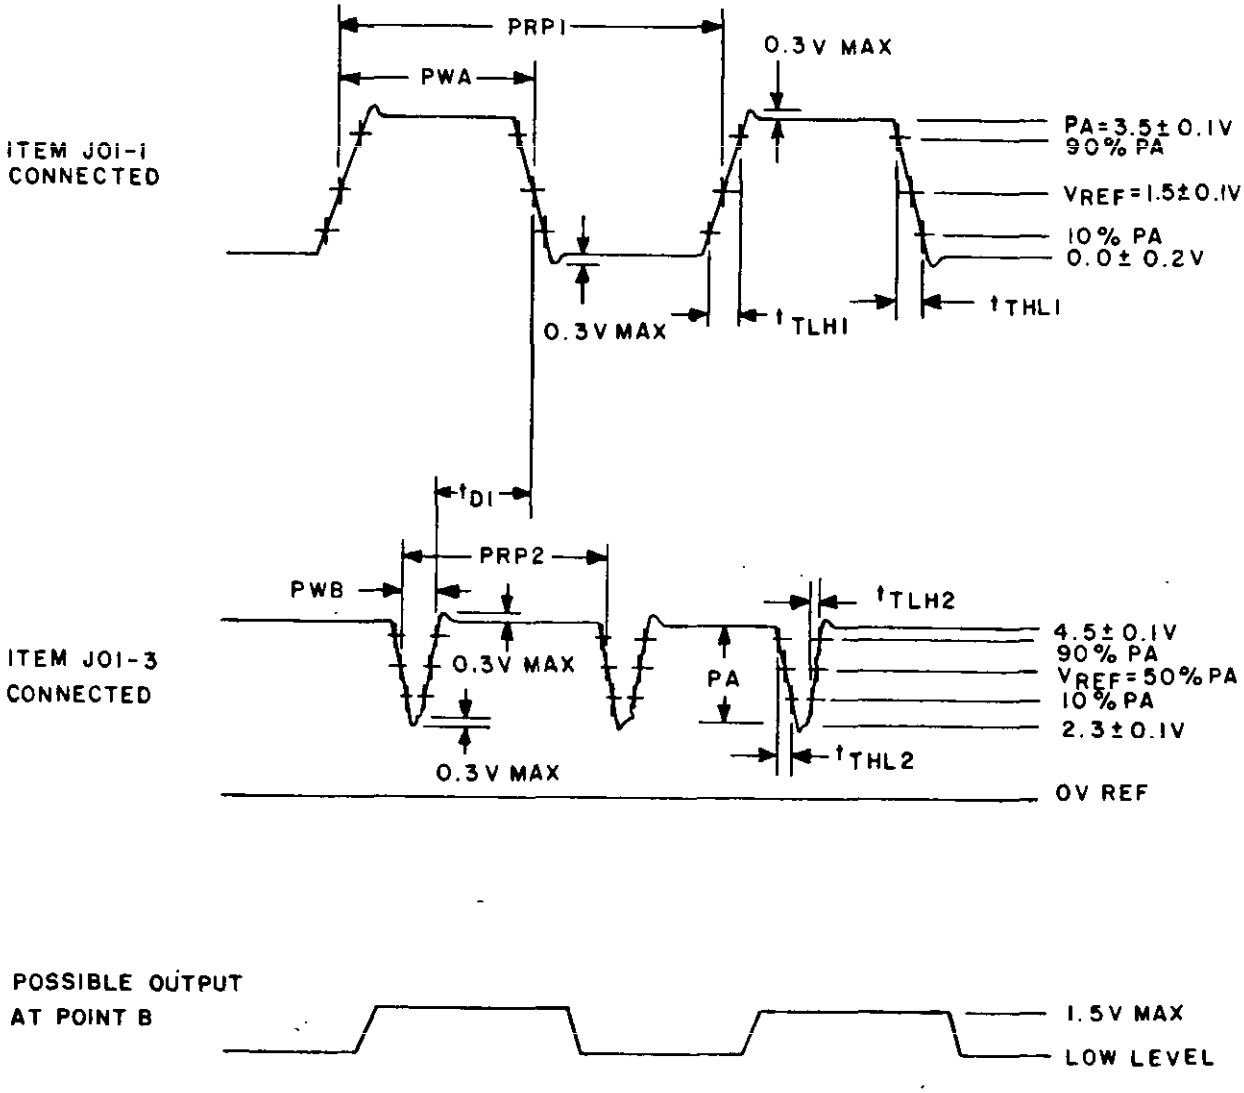

NOTES:
1. Item J01-1 pulse parameters:
   PRP1 = 1000 ±100 ns.
   PWA = 500 ±50 ns.
   $t_{TLH1} = t_{THL1}$ = 10 ±2 ns.
   t_{D1} = 100 ±10 ns.
2. Item J01-3 pulse parameters:
   PRP2 = 500 ±100 ns.
   PWB = 20 ±5 ns.
   $t_{TLH2} = t_{THL2}$ = 6 ±2 ns.
3. The output pulse at point B shall meet the requirements of table XXVI (test conditions AA49-AA64).

FIGURE 42. Noise sensitivity test circuit waveforms for table XXVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:53Z
Check the source to verify that this is the current version before use.

NOTE: The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N686)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:53Z
Check the source to verify that this is the current version before use.