
DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

FED SUP CLASS 5306

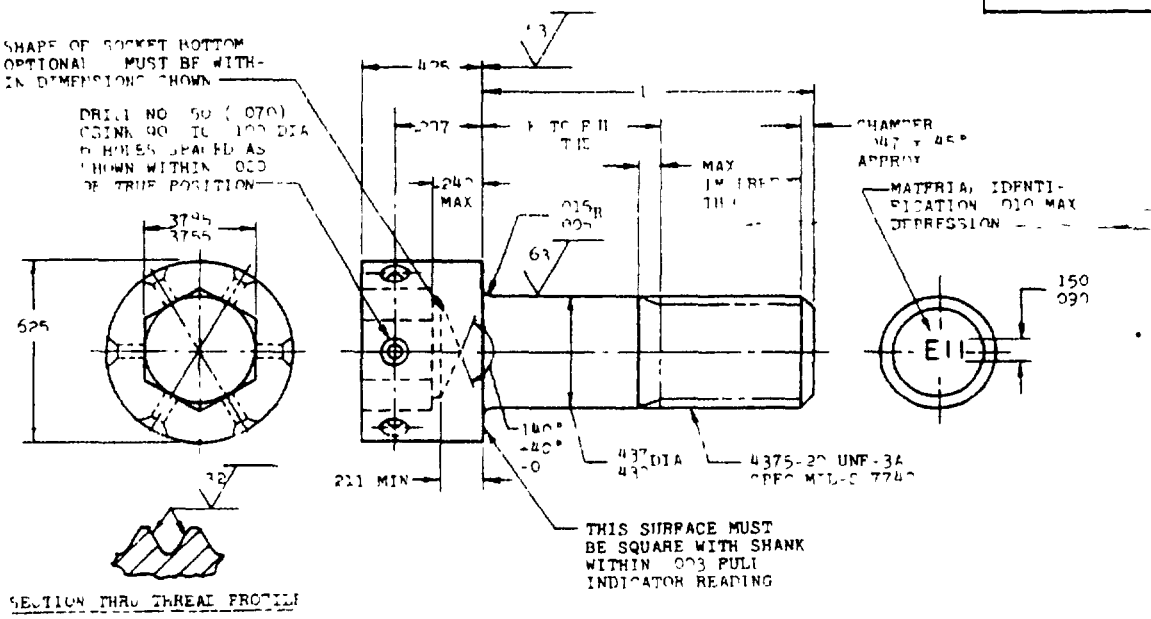

L	+ .000 - .060	PART NO	L	+ .000 - .060	PART NO	L	+ .000 - .060	PART NO	L	+ .000 - .060	PART NO
			1 562	438	AN148973	2 750	1 625	AN148987	4 500	3 375	AN149001
750	(a)	AN148960	1 625	500	AN148974	2 875	1 750	AN148988	4 625	3 500	AN149002
812	(a)	AN148961	1 687	562	AN148975	3 000	1 875	AN148989	4 750	3 625	AN149003
875	(a)	AN148962	1 750	625	AN148976	3 125	2 000	AN148990	4 875	3 750	AN149004
938	(a)	AN148963	1 812	688	AN148977	3 250	2 125	AN148991	5 000	3 875	AN149005
1 000	(a)	AN148964	1 875	750	AN148978	3 375	2 250	AN148992	5 125	4 000	AN149006
1 062	(a)	AN148965	1 938	812	AN148979	3 500	2 375	AN148993	5 250	4 125	AN149007
1 125	(a)	AN148966	2 000	875	AN148980	3 625	2 500	AN148994	5 375	4 250	AN149008
1 188	(a)	AN148967	2 062	938	AN148981	3 750	2 625	AN148995	5 500	4 375	AN149009
1 250	(a)	AN148968	2 125	1 000	AN148982	3 875	2 750	AN148996	5 625	4 500	AN149010
1 312	(a)	AN148969	2 250	1 125	AN148983	4 000	2 875	AN148997	5 750	4 625	AN149011
1 375	250	AN148970	2 375	1 250	AN148984	4 125	3 000	AN148998	5 875	4 750	AN149012
1 438	312	AN148971	2 500	1 375	AN148985	4 250	3 125	AN148999	6 000	4 875	AN149013
1 500	375	AN148972	2 625	1 500	AN148986	4 375	3 250	AN149000			

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED .0025 FIR PER INCH OF BOLT LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
(3) THE CONCENTRICITY OF THE HEXAGON SOCKET IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR
(4) THE CONCENTRICITY OF THE SHANK IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR

MATERIAL STEEL AMS 6322

HARDNESS ROCKWELL C32-36

FINISH CADMIUM PLATE AMS2400

SURFACE ROUGHNESS AS107

MANUFACTURING SPECIFICATION AMS7452

(3) INSPECTION ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640

BREAK SHARP EDGES .003- .015 UNLESS OTHERWISE SPECIFIED

INACTIVE FOR DESIGN AFTER 1 JAN 1960 SEE DRAWING MS9092

For definition and application of drawing status notes, see ANA Bulletin No 337

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 30 Jan 49 REVISED (1) 7 Jan 53 (2) 1 Aug 58 (3) 30 June 1966

PA 11
CUST AV, AS
1J

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - SOCKET HEAD, 6 HOLES DRILLED, 4375-20

AN148951
THRU
AN149050

Preparing Activity No 5306-1070

U S GOVERNMENT PRINTING OFFICE 1988 606 016/43938

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.