
FED. SUP CLASS
5307

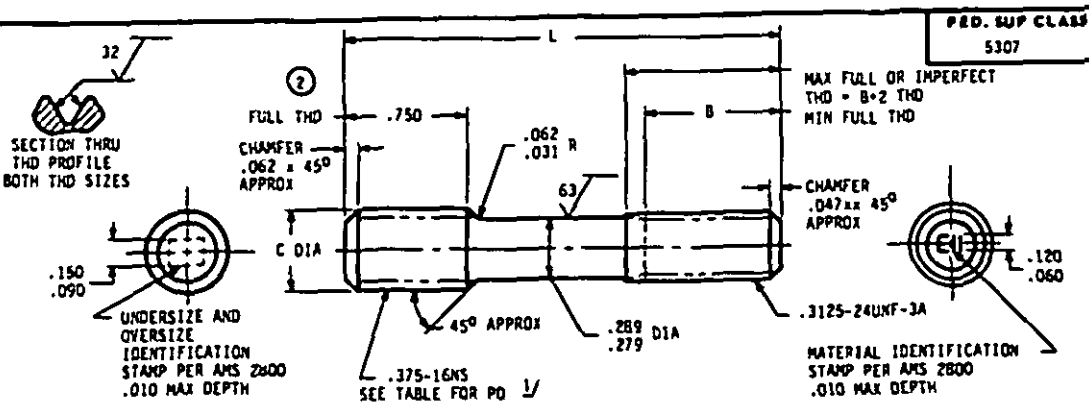

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C 1/		.370- .375	.370- .375	.370- .375	.370- .375	.379- .384	.379- .384
PD BEFORE PLATING		.3357-.3367	.3387-.3397	.3417-.3427	.3447-.3457	.3477-.3487	.3507-.3517
PD AFTER PLATING		.3362-.3377	.3392-.3407	.3422-.3437	.3452-.3467	.3482-.3497	.3512-.3527
PD LEAD THREAD		.3294-.3314	.3324-.3344	.3354-.3344	.3384-.3404	.3414-.3434	.3444-.3464
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.375	.500	AN155319	AN155320	AN155321	AN155322	AN155323	AN155324
1.438	.562	AN155325	AN155326	AN155327	AN155328	AN155329	AN155330
1.500	.625	AN155331	AN155332	AN155333	AN155334	AN155335	AN155336
1.562	.625	AN155337	AN155338	AN155339	AN155340	AN155341	AN155342
1.625	.625	AN155343	AN155344	AN155345	AN155346	AN155347	AN155348
(a) ~~1.688~~	~~.625~~	~~AN166360~~	~~AN166361~~	~~AN166362~~	~~AN166363~~	~~AN166364~~	~~AN166364~~
1.750	.625	AN155355	AN155356	AN155357	AN155358	AN155359	AN155360
(a) ~~1.812~~	~~.625~~	~~AN166361~~	~~AN166362~~	~~AN166363~~	~~AN166364~~	~~AN166365~~	~~AN166366~~
1.875	.625	AN155367	AN155368	AN155369	AN155370	AN155371	AN155372
1.938	.625	AN155373	AN155374	AN155375	AN155376	AN155377	AN155378
2.000	.625	AN155379	AN155380	AN155381	AN155382	AN155383	AN155384
2.062	.625	AN155385	AN155386	AN155387	AN155388	AN155389	AN155390
2.125	.625	AN155391	AN155392	AN155393	AN155394	AN155395	AN155396
2.188	.625	AN155397	AN155398	AN155399	AN155400	AN155401	AN155402
2.250	.625	AN155403	AN155404	AN155405	AN155406	AN155407	AN155408
2.312	.625	AN155409	AN155410	AN155411	AN155412	AN155413	AN155414
2.375	.625	AN155415	AN155416	AN155417	AN155418	AN155419	AN155420
2.438	.625	AN155421	AN155422	AN155423	AN155424	AN155425	AN155426
2.500	.625	AN155427	AN155428	AN155429	AN155430	AN155431	AN155432
2.625	.625	AN155433	AN155434	AN155435	AN155436	AN155437	AN155438
2.750	.625	AN155439	AN155440	AN155441	AN155442	AN155443	AN155444
2.875	.625	AN155445	AN155446	AN155447	AN155448	AN155449	AN155450
3.000	.625	AN155451	AN155452	AN155453	AN155454	AN155455	AN155456
3.125	.625	AN155457	AN155458	AN155459	AN155460	AN155461	AN155462
3.250	.625	AN155463	AN155464	AN155465	AN155466	AN155467	AN155468
3.375	.625	AN155469	AN155470	AN155471	AN155472	AN155473	AN155474
3.500	.625	AN155475	AN155476	AN155477	AN155478	AN155479	AN155480
3.625	.625	AN155481	AN155482	AN155483	AN155484	AN155485	AN155486
3.750	.625	AN155487	AN155488	AN155489	AN155490	AN155491	AN155492
3.875	.625	AN155493	AN155494	AN155495	AN155496	AN155497	AN155498
4.000	.625	AN155499	AN155500	AN155501	AN155502	AN155503	AN155504
4.125	.625	AN155505	AN155506	AN155507	AN155508	AN155509	AN155510
4.250	.625	AN155511	AN155512	AN155513	AN155514	AN155515	AN155516
1.688	.719	AN155517	AN155518	AN155519	AN155520	AN155521	AN155522
1.719	.719	AN155523	AN155524	AN155525	AN155526	AN155527	AN155528
1.812	.812	AN155529	AN155530	AN155531	AN155532	AN155533	AN155534

1/ PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

NOTES:
1. MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957.)
2. HARDNESS: ROCKWELL C26-32.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
4. SURFACE ROUGHNESS: AS 107.
5. MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
6. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED:
8. TOLERANCES: LINEAR DIMENSIONS ±.010.

(2) REVISED AND REDRAWN

(a) INACTIVE FOR DESIGN AFTER 25 MAR 1955. FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

THIS ATANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 MAY 50 REVISED (1) 25 MAR 55 (2) 14 OCT 61

User activity:

Review activity:
DLA - IB
NS

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all commercial standard drawings for the same product and shall become effective for the procurement of commercial supplies, on the one is new design, not later than 6 months after the latest date of approval shown.

P.A.	11
Other Cont	AV AS

AERONAUTICAL STANDARD

STUD, STEPPED, 2 DIA ENGAGEMENT, .375-16 x .3125-24

AN155301 THRU AN155600

PROCUREMENT SPECIFICATION
NONE

SHEET 1 OF 1

DISC Form 1299
APR 76

PROPOSED
5307-0283

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.