
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN165801 THRU AN166100

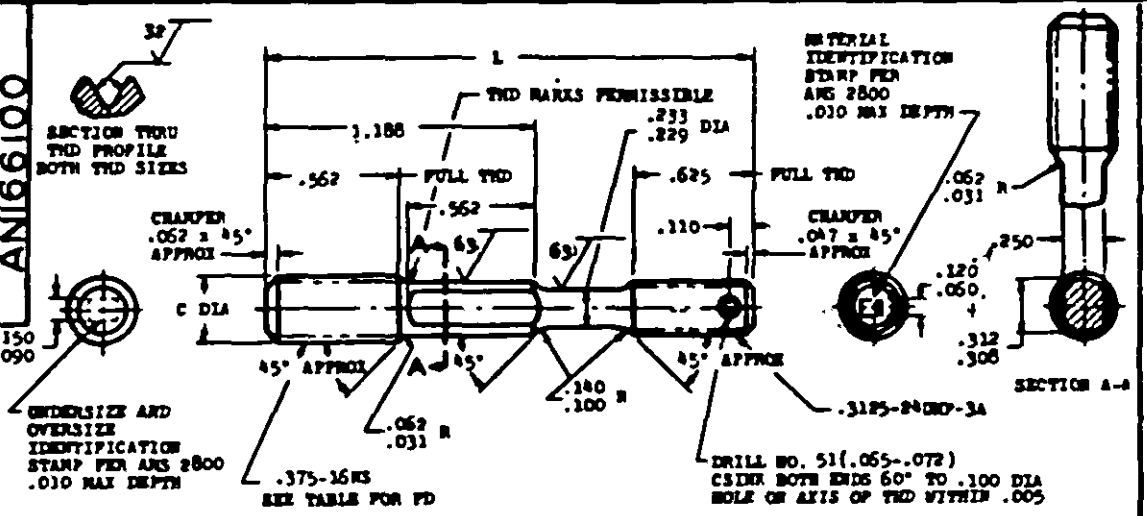

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD (O)	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.370- .375	.370- .375	.370- .375	.370- .375	.379- .384	.379- .384
FD BEFORE PLATING	.3357-.3367	.3387-.3397	.3417-.3427	.3447-.3457	.3477-.3487	.3507-.3517
FD AFTER PLATING	.3362-.3377	.3392-.3407	.3422-.3437	.3452-.3467	.3482-.3497	.3512-.3527
FD LEAD THREAD	.3294-.3314	.3324-.3344	.3354-.3374	.3384-.3404	.3414-.3434	.3444-.3464
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.062	AN165813	AN165814	AN165815	AN165816	AN165817	AN165818
2.125	AN165819	AN165820	AN165821	AN165822	AN165823	AN165824
2.188	AN165825	AN165826	AN165827	AN165828	AN165829	AN165830
2.250	AN165831	AN165832	AN165833	AN165834	AN165835	AN165836
2.312	AN165837	AN165838	AN165839	AN165840	AN165841	AN165842
2.438	AN165843	AN165844	AN165845	AN165846	AN165847	AN165848
2.562	AN165849	AN165850	AN165851	AN165852	AN165853	AN165854
2.688	AN165855	AN165856	AN165857	AN165858	AN165859	AN165860
2.812	AN165861	AN165862	AN165863	AN165864	AN165865	AN165866
2.938	AN165867	AN165868	AN165869	AN165870	AN165871	AN165872
3.062	AN165873	AN165874	AN165875	AN165876	AN165877	AN165878
3.188	AN165879	AN165880	AN165881	AN165882	AN165883	AN165884
3.312	AN165885	AN165886	AN165887	AN165888	AN165889	AN165890
3.438	AN165891	AN165892	AN165893	AN165894	AN165895	AN165896
3.562	AN165897	AN165898	AN165899	AN165900	AN165901	AN165902
3.688	AN165903	AN165904	AN165905	AN165906	AN165907	AN165908
3.812	AN165909	AN165910	AN165911	AN165912	AN165913	AN165914
3.938	AN165915	AN165916	AN165917	AN165918	AN165919	AN165920
4.062	AN165921	AN165922	AN165923	AN165924	AN165925	AN165926
4.188	AN165927	AN165928	AN165929	AN165930	AN165931	AN165932
4.312	AN165933	AN165934	AN165935	AN165936	AN165937	AN165938
4.438	AN165939	AN165940	AN165941	AN165942	AN165943	AN165944
4.562	AN165945	AN165946	AN165947	AN165948	AN165949	AN165950
4.688	AN165951	AN165952	AN165953	AN165954	AN165955	AN165956
4.812	AN165957	AN165958	AN165959	AN165960	AN165961	AN165962
4.938	AN165963	AN165964	AN165965	AN165966	AN165967	AN165968
5.062	AN165969	AN165970	AN165971	AN165972	AN165973	AN165974
5.188	AN165975	AN165976	AN165977	AN165978	AN165979	AN165980
5.312	AN165981	AN165982	AN165983	AN165984	AN165985	AN165986
5.438	AN165987	AN165988	AN165989	AN165990	AN165991	AN165992
5.562	AN165993	AN165994	AN165995	AN165996	AN165997	AN165998

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C36-32.
FINISH: CADMIUM PLATE AMS 8400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(3) CANCELED AS OF 9 OCT 87

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MISSILE AND PROPULSION UTILITY PARTS COMMITTEE OF THE SAE.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN165801 THRU AN166100
NONE	STUD-STRIPPED, DRILLED, RECESS, WEDGE PAD 1.5 DIA ENGAGEMENT, .375-16 x .3125-24	

E-25-121

Project 5307-0416

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.