MIL-M-12192A(Ord)

1 September 1959
SUPERSEDING
MIL-P-12192(Ord)
3 September 1952

MILITARY SPECIFICATION

MOUNTS, TELESCOPE, M79, M79A1 AND 8228899; PACKAGING OF

1. SCOPE

1.1 This specification covers the packaging and packing of Telescope Mounts M79, M79A1 and 8228899 for each level of protection.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

UU-T-106	Tape, Masking, Paper (Pressure-Sensitive)
UU-T-111	Tape, Paper Gummed (Sealing and Securing)
PPP-B-601	Boxes; Wood, Cleated Plywood
PPP-B-621	Boxes; Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-B-676	Boxes, Set-Up, Paperboard
PPP-P-291	Paper, Wrapping, Cushioning
PPP-T-76	Tape, Pressure-Sensitive Adhesive, Paper, Water Resistant

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservation, Methods of
MIL-B-117	Bags, Interior Packaging
MIL-B-121	Barrier Material, Greaseproofed, Flexible (Waterproofed)
MIL-B-130	Barrier Material, Paper, Noncorrosive
MIL-L-3150	Lubricating Oil; Preservative, Medium

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables For Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials and methods. - The materials, methods and procedures used in the packaging of items shall be in accordance with this specification. Materials and methods not covered by a specification shall be suited to the intended use and subject to the approval of the contracting officer.

3.1.1 Materials. - The following shall apply wherever packaging materials are referred to in this specification by name only:

REFERENCE	FULL IDENTIFICATION
Flexible single face corrugated fiberboard	Type 1, class 1, of Specification PPP-P-291
Gummed tape	Class 2 of Specification UU-T-111
Pressure-Sensitive tape	Type I or II of Specification UU-T-106

3.2 Size of containers. - Bags, interior containers and exterior containers shall be of a minimum size that will adequately contain the items.

3.3 Preservation and packaging.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

3.3.1 Level A.

3.3.1.1 Cleaning. - Cleaning process C-1 of Specification MIL-P-116 shall be followed to clean the exterior surfaces of the mount.

3.3.1.2 Drying. - Immediately after cleaning, the mount shall be dried thoroughly in accordance with an applicable procedure specified in Specification MIL-P-116 that will not damage the item.

3.3.1.3 Preservative application. - Preservative conforming to Specification MIL-L-3150 (P-7 of Specification MIL-P-116) shall be applied on the exposed unprotected metal surfaces of the mount. The preservative shall be applied in accordance with the brushing procedure specified in Specification MIL-P-116. Excess preservative shall be removed.

3.3.1.4 Unit packaging. - Packaging shall be as specified herein and as shown in figure 1, which is in conformance with Method IA-8 of Specification MIL-P-116.

3.3.1.4.1 Covering level vial. - The metal cover on the level vial shall be positioned so that the glass surface of the vial is covered. The metal cover shall be secured in place with pressure-sensitive tape.

3.3.1.4.2 Wrapping the mount with greaseproofed barrier material. - The preservative coated surfaces shall be covered by wrapping the mount with greaseproofed barrier material conforming to type II, grade A, class 2 of Specification MIL-B-121. The greaseproofed barrier material shall be secured in place with pressure-sensitive tape.

3.3.1.4.3 Overwrapping the mount. - Each wrapped mount shall be overwrapped with two thicknesses of flexible single face corrugated fiberboard. The wrap shall be secured in place with gummed tape.

3.3.1.4.4 Water-vaporproof bag. - Each wrapped mount shall be placed in a water-vaporproof bag conforming to type II, class e of Specification MIL-B-117. The bag shall be heat sealed in such a manner as to pass the heat seal and quick leak tests of Specification MIL-P-116. Air shall be exhausted from the bag prior to final closure.

3.3.1.4.5 Set-up paperboard box. - Each bagged mount shall be immobilized in a set-up paperboard box conforming to type I or IV, any class and style of Specification PPP-B-676. The inside dimensions of the box shall be 5. inches long by 4. inches wide by 4. inches deep.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

3.3.1.5 Intermediate packaging. - Ten unit packaged mounts, containing the same stock number, shall be immobilized in a fiberboard box conforming to class 2 or 3, any compliance symbol and any style, except FTC, TS, OPF and FPF of Specification PPP-B-636. The inside dimensions of the box shall be 21-1/2 inches long by 10-1/2 inches wide by 4-1/4 inches deep. Each fiberboard box shall be closed as specified in the appendix of Specification PPP-B-636 utilizing pressure-sensitive tape conforming to Specification PPP-T-76.

3.3.2 Level C.

3.3.2.1 Cleaning and drying. - Cleaning and drying shall be as specified in 3.3.1.1 and 3.3.1.2.

3.3.2.2 Unit packaging. - Packaging shall be as specified in 3.3.1.4.1 and the following, which is in conformance with Method III of Specification MIL-P-116:

(a) Each mount shall be wrapped with noncorrosive barrier material, conforming to type 3 of Specification MIL-B-130 and overwrapped with flexible single face corrugated fiberboard. The wrap shall be secured in place with gummed tape.

3.3.2.3 Intermediate packaging. - Ten wrapped mounts, containing the same stock number, shall be immobilized in a fiberboard box conforming to type I or II, class 1, any style of Specification PPP-B-636. The box shall be closed as specified in the appendix of Specification PPP-B-636.

3.4 Packing. - Unless otherwise specified, only mounts with the same stock number shall be packed in a shipping container.

3.4.1 Level A. - Four intermediate packages shall be immobilized in a shipping container conforming to one of the following specifications:

PPP-B-601 - Style A or B (oversea type) - type II or III, class 2 plywood
PPP-B-621 - Class 2 (oversea), style 2 or 4

3.4.2 Levels B and C. - A number of intermediate packages shall be immobilized in a shipping container conforming to type 1 or 2, class 1, any style, except FTC, TS, OPF and FPF, of Specification PPP-B-636. The gross weight shall not exceed the weight limit specified in Specification PPP-B-636. The fiberboard box shall be closed as specified in the appendix of Specification PPP-B-636. When the quantity of mounts to be shipped is equal to or less than the quantity specified in 3.3.1.5 and 3.3.2.3, the intermediate container shall be the shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

3.4.3 Strapping. - Strapping shall be applied on shipping containers as specified in the applicable container specification.

3.5 Marking.

3.5.1 Interior packages. - Each bag, each box and each wrapped mount for Level C shall be marked in accordance with Standard MIL-STD-129. Serial numbers shall be added in the identification data on each Level A unit package and intermediate package.

3.5.2 Shipping containers. - Each shipping container shall be marked in accordance with Standard MIL-STD-129. If the serial numbers of the mounts packed in a Level A or B shipping container are in consecutive order, the serial numbers shall be indicated as specified in Standard MIL-STD-129. If the serial numbers are not in consecutive order, they shall be indicated on packing lists.

3.5.3 Stock number. - The stock number to be added in the identification data shall be obtained from the contracting officer.

3.6 Preproduction pack . - Prior to quantity production, a preproduction pack, consisting of a complete and packed shipping container, shall be inspected to determine conformance with the applicable requirements of this specification. A rough handling test is required.

3.7 Workmanship. - All operations involved in accomplishing corrosion prevention, preservation, packaging and packing by the procedures specified herein shall be in accordance with the highest grades of practice associated with this type of work.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor inspection. - Unless otherwise specified herein, the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order.

4.1.1 Contractor's quality assurance system. - The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the supplies under this contract. A current written

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

description of the system shall be submitted to the contracting officer prior to initiation of production. The written description will be considered acceptable when it provides:

(a) The quality assurance required by the applicable drawings and specifications listed in the contract or order.

(b) Contractor's quality standards of acceptability.

(c) Procedure for continually evaluating product quality.

(d) Procedure for continually reporting evidence of actual product quality.

(e) Measures for preventing any significant departure of product quality from standards.

4.1.1.1 The contractor will not be restricted to the inspection station and inspection method of the written description, provided that the substitutes thereof will provide, as a minimum, the quality assurance required by the contractual documents. In cases of dispute as to whether certain procedures of the system provide equal assurance, the comparable procedures of the applicable drawings and specifications shall be used. The contractor shall notify the Government of, and obtain approval for, any change to the written procedure that may affect the degree of assurance required by this specification or other documents referenced herein.

4.1.2 Government verification. - All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied and government inspection to measure quality of product offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices which might have an effect upon the quality of the product, will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies discovered will be cause for suspension of acceptance until correction has been made or until conformance of product to prescribed criteria has been demonstrated. To avoid interference with operations, the contractor will designate a responsible official or officials to whom the Government inspector will report such instances.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

4.2 Classification of test. - The inspection and testing of the packaging of Telescope Mounts M79, M79A1 and 8228899 shall be classified as follows:

(a) Pilot pack
(b) Acceptance test

4.3 Inspection provisions. - Quality assurance provisions as specified in Specification MIL-P-116 shall apply, where applicable.

4.3.1 Control of materials. - Materials shall be tested to determine conformance to contractually applicable specifications. Such tests may be conducted in the prime contractor's or subcontractor's facilities, or in other suitably equipped laboratories. The test results shall be available to the Government inspector for review. Certified test reports, identifiable with the material, may be accepted in lieu of repeated tests. The Government reserves the right, in any case, to require retests to assure that the materials are acceptable.

4.3.2 Lot formation. - Unless otherwise specified by the contracting officer, or his representative, inspection lot sizes and lot formation shall be in accordance with Standard MIL-STD-105.

4.3.3 Acceptance tests. - The classification of defects in Tables I and II shall constitute the minimum inspection requirements to be performed by the contractor prior to acceptance or rejection by lot. The Government reserves the right to inspect for any applicable requirement, and to reject individual nonconforming items.

4.3.3.1 All rejected lots shall be screened for all defective characteristics. After corrections have been made and the Government inspector informed of the corrective action taken, the lot shall be resubmitted for acceptance as outlined in Standard MIL-STD-105.

TABLE I - CLASSIFICATION OF DEFECTS

Normal Inspection Level II, and Sampling Plan Table IV-A
of Standard MIL-STD-105
Reduced Inspection Level I, and Sampling Plan Table IV-A
of Standard MIL-STD-105
(AQL values are expressed in percent defective)

MAJOR: AQL 1.5	Req't Par.	Test Method
1. Improper cleaning (Level A, C)	3.3.1.1 3.3.2.1	MIL-P-116
2. Improper drying (Level A, C)	3.3.1.2 3.3.2.1	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

TABLE I - CLASSIFICATION OF DEFECTS (Cont'd)

MAJOR: AQL 1.5		Req't Par.	Test Method
3.	Preservative application; missing, inadequate, not as specified(Level A)	3.3.1.3	Visual
4.	Unit packaging; incorrect method (Level A, C)	3.3.1.4 3.3.2.2	MIL-P-116
5.	Covering level vial; not positioned correctly, metal cover not secured (Level A, C)	3.3.1.4.1 3.3.2.2	Visual MIL-P-116
6.	Greaseproofed barrier material; not as specified, not secured (Level A)	3.3.1.4.2	Visual
7.	Overwrap; incorrect quantity of thicknesses, not secured, not as specified (Level A)	3.3.1.4.3	Visual
8.	Water-vaporproof bag; not as specified, incorrectly sealed, air not exhausted, damaged (Level A)	3.3.1.4.4	Visual
9.	Bagged unit not immobilized, box not as specified, incorrect dimensions (Level A)	3.3.1.4.5	Standard Measuring Equipment (SME) Visual
10.	Class, style and size of intermediate package not as specified, unit packs not immobilized, incorrect quantity, tape missing, incorrectly applied, closure of box not as specified (Level A, C)	3.3.1.5 3.3.2.3	SME Visual
11.	Type, class and style of shipping container not as specified, incorrect size, gross weight exceeded, incorrect quantity of intermediate packages, packages not immobilized, packages containing units of different stock numbers (Level A)	3.4 3.4.1	SME Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

TABLE I - CLASSIFICATION OF DEFECTS (Cont'd)

MAJOR: AQL 1.5		Req't Par.	Test Method
12.	Shipping container not as specified, intermediate packages not immobilized, gross weight exceeded (Level B, C)	3.4.2	SME Visual
13.	Strapping incorrect, inadequate, missing, (Level A, B, C)	3.4.3	Visual
14.	Interior package markings incorrect, serial numbers missing, incorrect (Level A)	3.5.1	Visual
MINOR: AQL 4.0		**Req't Par.**	**Test Method**
41.	Exterior markings incorrect, serial numbers missing, incorrect (Level A, B, C)	3.5.2 3.5.3	Visual
42.	Workmanship	3.7	Visual

TABLE II - CLASSIFICATION OF DEFECTS

Use Inspection Level L7, and Sampling Plan Table IV-A of Standard MIL-STD-105

(AQL values are expressed in percent defective)

MAJOR: AQL 4.0	Method of Unit Protection	Test
Heat seal	IA-8	MIL-P-116
Quick leak	IA-8	MIL-P-116

4.4 Test methods and procedures.

4.4.1 Preproduction pack . - The preproduction pack specified in 3.6 shall be inspected 100 percent by the contractor, or his representative, and witnessed by the Government inspector to determine conformance with the requirements of this specification for Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

4.4.1.1 Preproduction pack failure. - Should the preproduction pack fail to pass the test for Government acceptance, packaging operations will cease until the defective characteristics have been corrected in the process used to produce the preproduction pack. When corrections in the process have been made, a new preproduction pack shall be completely inspected by the contractor and witnessed by the Government inspector.

4.4.1.2 Sample packs. - Sample packs for heat seal and quick leak tests shall be selected from acceptable packs of the samples that have met the minimum inspection requirements listed in Table 1.

4.4.2 Rough handling tests. - The pilot pack, specified in 3.6, shall be subjected to the "Rough handling test" in accordance with Specification MIL-P-116, applicable only to Level A.

5. PREPARATION FOR DELIVERY

5.1 There are no applicable requirements.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Selection of applicable levels of packaging and packing.

6.2 Dimensions, cubage and weight of shipping containers. - The following inside dimensions, cubage and gross weight are approximate for four intermediate packaged mounts packed in a nailed wood box for Level A:

Inside dimensions - 22. inches long by 22. inches wide by 9-1/2 inches deep
Cubage - 3.7 cubic feet
Gross weight - 160. pounds

6.3 Definitions.

6.3.1 Standard measuring equipment (SME). - Standard measuring equipment includes the common hand-type measuring devices which are usually stocked by commercial supply houses for ready supply (shelf items), and which are normally used by an inspector to perform dimensional inspection of items under procurement. This category also includes commercial testing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any invention that may in any way be related thereto.


Custodian:

Army - Ordnance Corps

Preparing Activity:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

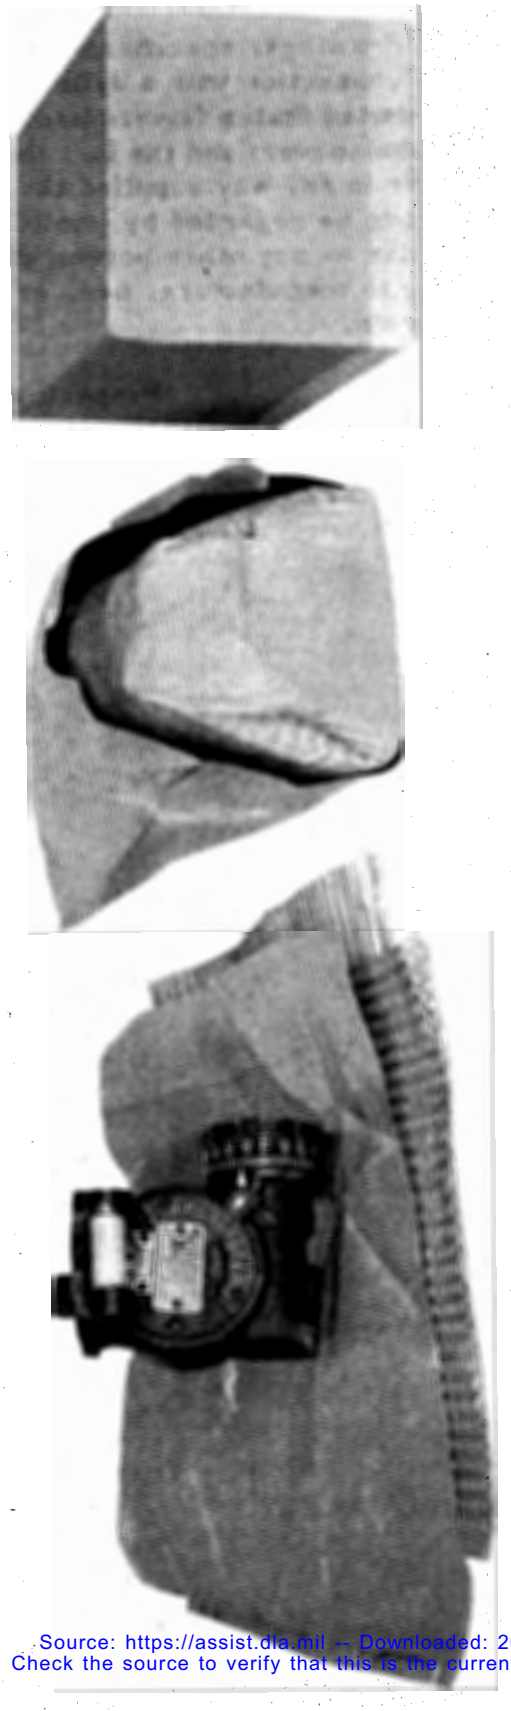

MOUNT, TELESCOPE, M79 - Packaging of the mount

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.