MILITARY SPECIFICATION

PACKAGING OF MOUNT, TELESCOPE, T178

1. SCOPE

1.1 This specification covers the packaging, packing and marking for domestic shipment and storage, overseas shipment and interplant shipment of Telescope Mount T178, with or without equipment.

Item	Stock No.
Mount, Telescope, T178, W/E	F001-6734107
Consisting of:	
1 Mount, Telescope, T178	F001-7664967
Including mounting Hardware	
6 Cap screws	
6 Lock washers	
1 Light, Instrument, M36	F205-7690564

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications and standard, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

NN-B-601	-	Boxes, Wood-Cleated-Plywood, for Domestic Shipment.
NN-B-621	-	Boxes, Wood, Nailed and Lock Corner.
UU-C-843	-	Cushioning Materials, Cellulosic.
UU-T-111	-	Tape; Paper, Gummed (Kraft).
LLL-F-291	-	Fiberboard, Corrugated, Single Face (Flexible).

Military

JAN-P-101	-	Packaging and Packing for Overseas Shipment - Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.
JAN-P-105	-	Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

Military (Contd.)

JAN-P-106	-	Packaging and Packing for Overseas Shipment - Boxes, Wood, Nailed.
JAN-P-108	-	Packaging and Packing for Overseas Shipment - Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.
MIL-P-116	-	Preservation, Methods of.
JAN-P-117	-	Packaging and Packing for Overseas Shipment - Bags, Interior Packaging.
JAN-B-121	-	Barrier Materials, Greaseproof.
JAN-P-125	-	Packaging and Packing for Overseas Shipment - Barrier Materials, Waterproof, Flexible.
JAN-P-127	-	Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure Sensitive, Water-Resistant.
MIL-B-131	-	Barrier-Material; Water-Vaporproof, Flexible.
JAN-P-133	-	Packaging and Packing for Overseas Shipment - Boxes, Set-Up, Paperboard.
MIL-A-140	-	Adhesive, Water-Resistant, Waterproof Barrier Material.
MIL-C-5092	-	Cement, Rubber (Synthetic and Reclaimed Rubber Base).
MIL-G-10352	-	Gasket Material, Moisture-Vaporproof, Barrier Application.
MIL-P-11445	-	Packaging of Lights, Aiming Post and Lights, Instrument.
MIL-C-11796	-	Compound, Corrosion Preventive, Petrolatum-Type, Hot Application.

Ordnance Department Tentative

AXS-1472	-	Adhesive, Label (Water-Resistant).

STANDARD

Military

MIL-STD-129	-	Marking of Shipments.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Materials - The following shall apply where packaging materials are referred to in this specification by name only:

Reference	Full Identification
Cellulosic cushioning material	Any type and class (at least 1/4 inch thick) of Specification UU-C-843

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

Reference	Full Identification
Cement	Type 2 of Specification MIL-C-5092
Greaseproof bag	Type II or III, grade B, class a of Specification JAN-P-117
Greaseproof barrier material	Type II or III, grade C, class 1 of Specification JAN-B-121
Preservative	Class 3 of Specification MIL-C-11796
Pressure sensitive tape	Any type and grade of Specification JAN-P-127
Water-resistant adhesive	Applicable requirements of Specification MIL-A-140

3.2 Disassembly and cleaning

3.2.1 Disassembly - The signal light assembly shall be removed from the housing assembly.

3.2.2 Cleaning - The exterior surfaces of each mount shall be cleaned so as to be free from dirt, smudges, fingerprints and other foreign substances in accordance with cleaning methods C-1 and C-4 of Specification MIL-P-116. Cleaning method C-4 shall be used to clean all critical unprotected surfaces. Instrument Light M36 shall be cleaned in accordance with Specification MIL-P-11445.

3.3 Packaging - Packaging of the mount and equipment is illustrated in Figures 3, 4 and 5.

3.3.1 Telescope mount without equipment

3.3.1.1 Preservative shall be applied on the mounting hardware (screws and washers) for the mount. The hardware shall then be placed in a greaseproof bag.

3.3.1.2 Preservative shall be applied on the mounting hardware (screws and washers) and unpainted surfaces of the mounting bracket for the signal light assembly. The hardware shall then be placed in a greaseproof bag or wrapped with greaseproof barrier material, which shall be secured to the signal light assembly with pressure sensitive tape. The coated surfaces on the mounting bracket shall be wrapped with greaseproof barrier material.

3.3.1.3 The signal light assembly shall then be wrapped with either flexible single face corrugated fiberboard conforming to Specification LLL-F-291 or cellulosic cushioning material. The wrap shall be secured with either pressure sensitive tape or gummed tape conforming to class 1 of Specification UU-T-111. The wrapped signal light assembly shall be placed in a bag fabricated from barrier material conforming to class D of Specification MIL-B-131. The bag shall be heat sealed, exhausting entrapped air prior to final closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

3.3.1.4 Preservative, conforming to class 2 of Specification MIL-C-11796, shall be applied on all unpainted surfaces of the mount. All coated surfaces shall be covered or wrapped with greaseproof barrier material.

3.3.1.5 The bags, containing the mounting hardware for the mount and the signal light assembly, shall be secured to the mount with pressure sensitive tape.

3.3.1.6 The mount shall then be secured to the wood base (inside a floating bag) shown in Figure 1 with carriage bolts. Cellulosic cushioning shall be added on sharp projections to prevent damage to the floating bag. The floating bag shall be fabricated from flexible water-vaporproof barrier material conforming to class A of Specification MIL-B-131. Gaskets shall be placed on each side of the barrier material where the carriage bolts pass through the barrier material. The gaskets shall be fabricated from material conforming to MIL-G-10352. The gaskets inside the bag shall be coated with cement on the side which contacts the barrier material. Cement shall be applied on both sides of the gaskets which are between the barrier material and the wood base. Greaseproof barrier material conforming to Specification JAN-B-121 shall be placed on blocks as shown in figure 4. Flat steel washers and steel lock washers shall be added under the nuts except on the bolt which is too close to the rib to accommodate washers. Unthinned paint shall be applied on the exposed threads above the nuts. Water-resistant adhesive shall be applied over the bolt heads and on the wood surfaces around the edges of the bolt heads. The bag shall be completely sealed with a continuous seam, at least 2 inches wide, of water-resistant adhesive.

3.3.2 Prepackaging the telescope mount with equipment

3.3.2.1 The instrument light shall be packaged as specified in Specification MIL-P-11445, except that the box in which the bagged light is placed may be omitted.

3.3.2.2 The telescope mount shall be prepared and secured to a wood base inside a floating bag as specified in 3.3.1, except that the bagged instrument light shall be secured to the mount with pressure sensitive tape as shown in figure 5.

3.4 Packing - Packing the mount, with or without equipment, is illustrated in figure 6.

3.4.1 For domestic shipment and storage and overseas shipment

3.4.1.1 The wood base containing the telescope mount, with or without equipment, shall be placed in a shipping container conforming to either of the following specifications:

JAN-P-105, Style A or B.
JAN-P-106, Style 2 or 4. Minimum thickness of lumber for sides, top and bottom shall be 11/16 inch, when shipment is to be made by an ocean going vessel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

3.4.1.2 Size and weight of packed shipping container

Inside dimensions	- 25-5/8" long x 13-5/8" wide x 10-3/8" deep
Cubage	- 3 cubic feet
Gross weight	- 75 pounds

3.4.1.3 The steel straps shall not be stapled on the shipping container for domestic shipment and storage.

3.4.2 Immobilizing - The wood base shall fit snugly in the shipping container and shall be immobilized by nailing a hold down cleat in each corner of the container as shown in Figure 6.

3.5 Identification and marking - In addition to other markings that may be required (see 6.2), the information to be placed on each container shall be in accordance with Standard MIL-STD-129. The information shall be stencilled or printed on the container. The serial number shall be included in the identification data.

3.5.1 Official Ordnance Corps Inspection Seal (Escutcheon) - Either a paper seal or a stamped escutcheon shall be placed adjacent to the permanent markings on each shipping container. The Ordnance District's symbol, such as NYOD, BOD, etc., shall be added on each paper seal or adjacent to each stamped escutcheon. If paper seals are used, they shall be affixed and coated with water-resistant label adhesive conforming to Specification AXS-1472.

3.6 Interplant shipment requirements - Where an interplant shipment is involved, the following cleaning, packaging, packing and marking requirements shall apply:

3.6.1 Cleaning - Cleaning shall be in accordance with 3.2.2. The signal light assembly shall not be removed from the housing assembly.

3.6.2 Packaging - Packaging shall be as specified in 3.3 except as follows:

3.6.2.1 Application of preservatives may be omitted.

3.6.2.2 The instrument light shall be packaged for interplant shipment as specified in Specification MIL-P-11445.

3.6.2.3 The floating bag, gaskets and application of adhesive over the bolt heads may be omitted.

3.6.3 Packing

3.6.3.1 The shipping container shall conform to one of the following specifications:

NN-B-601	JAN-P-108	(Any compliance symbol except
NN-B-621		W6 and any style except FTC)

3.6.3.2 The inside surfaces of wood shipping containers shall be lined with flexible waterproof barrier material conforming to Specification JAN-P-125. The wood base containing the mount shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

be immobilized in the wood shipping container as specified in 3.4.2.

3.6.3.3 If the fiberboard shipping container is used, a framework, shown in figure 2, shall be nailed to the wood base. The base and framework shall fit snugly in the fiberboard container.

3.6.3.4 The fiberboard container shall be closed by applying water-resistant adhesive over all areas of contact on the flaps and covering all seams, including the manufacturer's joint, with pressure sensitive tape. The adhesive shall conform to Specification JAN-P-101 and the tape shall conform to type II or III, grade A or B (at least 2 inches wide) of Specification JAN-P-127.

3.6.4 Identification and marking - Identification and marking shall be as specified in 3.5, except that the serial number may be omitted.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Inspection - All methods and materials shall be subject to inspection by U. S. Government inspectors, who shall be afforded proper facilities for determining compliance with this specification and the applicable specifications. The passing as satisfactory of any phase of a completed pack shall not relieve the contractor of his responsibility to submit a finished pack free from faulty workmanship or materials.

5. PREPARATION FOR DELIVERY

Not applicable

6. NOTES


6.1 Ordering data - Invitation for bids and contracts or orders should specify the title, number and date of this specification, the type of shipment involved, and type of packaging and packing required.

6.2 The marking of overseas shipping containers by Army Installations **should** be in accordance with Department of the Army and Air Force Manual SR 746-30-5, "Marking of Oversea Supply".

NOTICE:--When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Custodian:
Army -- Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

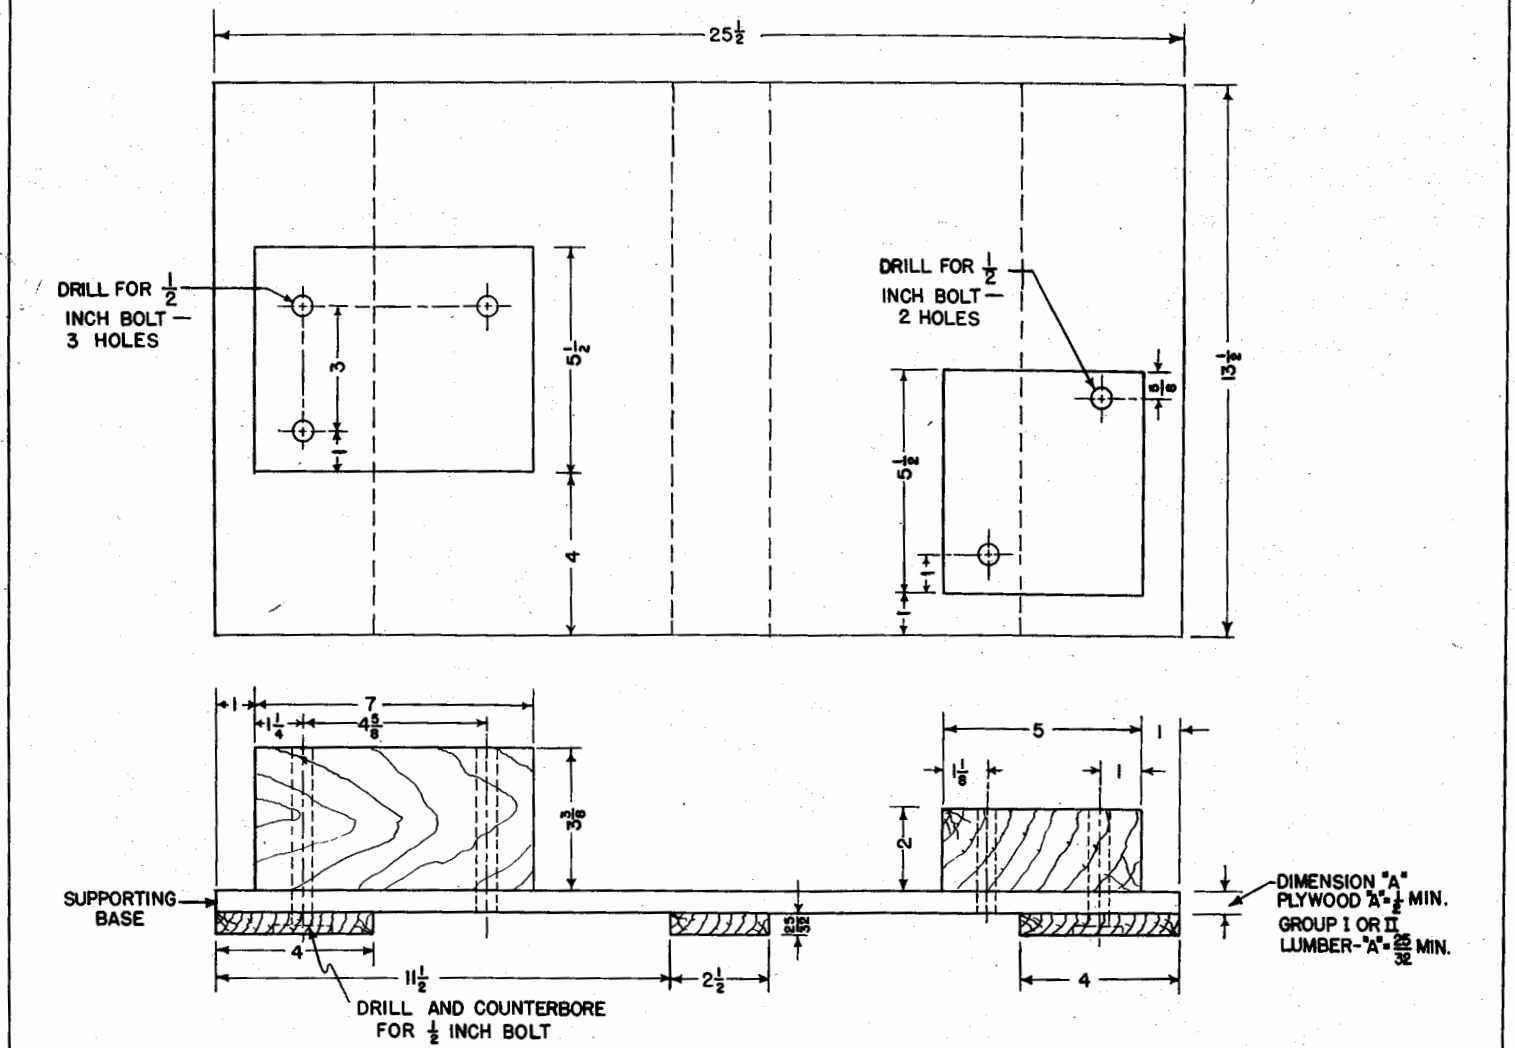

NOTES: USE GROUP I OR II LUMBER. PLYWOOD IS PREFERABLE FOR THE SUPPORTING BASE

FIGURE I

BASE FOR TELESCOPE MOUNT T178

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.


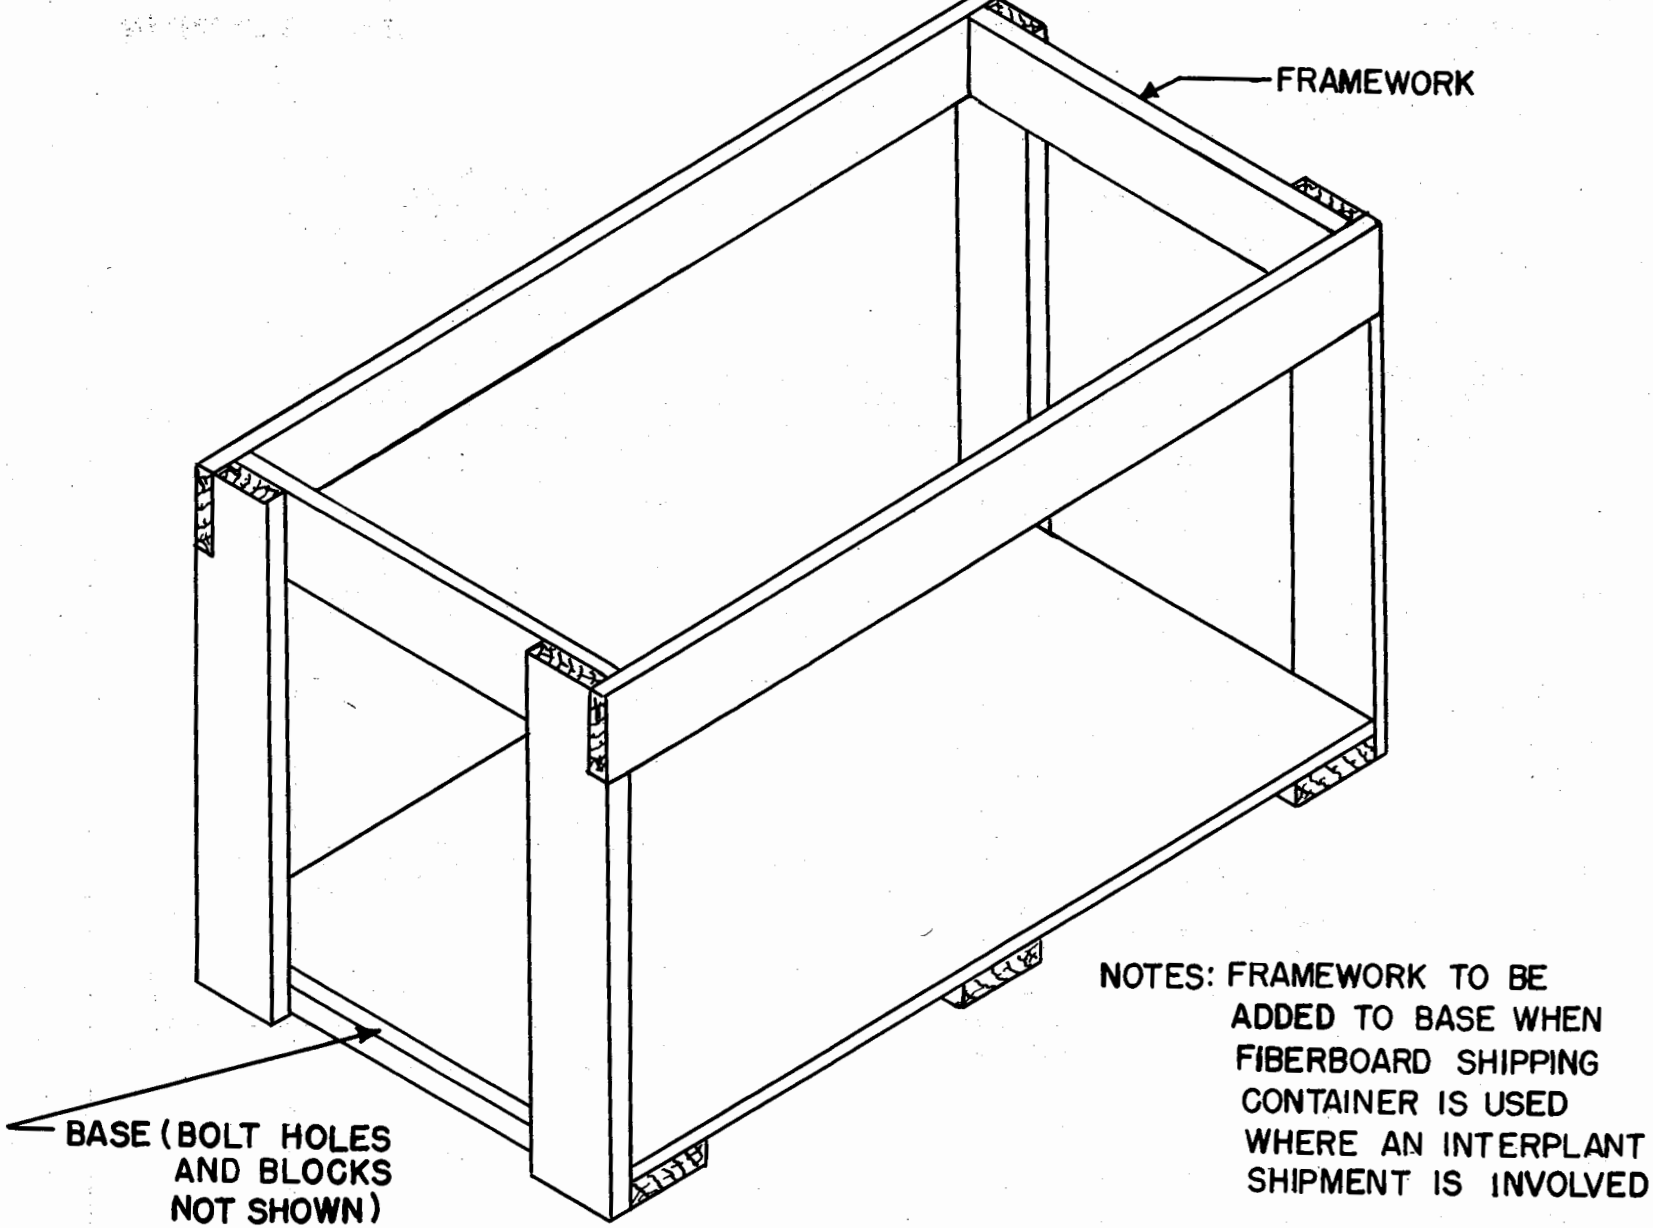


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

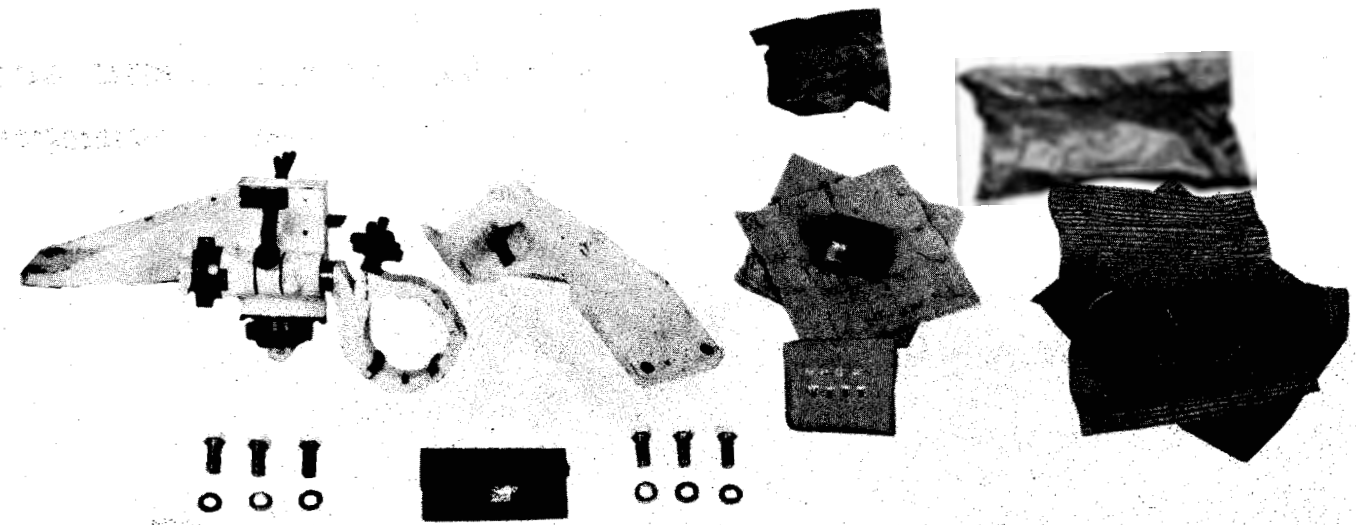


Neg.#22847-3 7-23-52 FRANKFORD ARSENAL ORD. CORPS

MOUNT, TELESCOPE T178 W/E - Prepackaging the signal light, instrument light and mounting hardware.

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

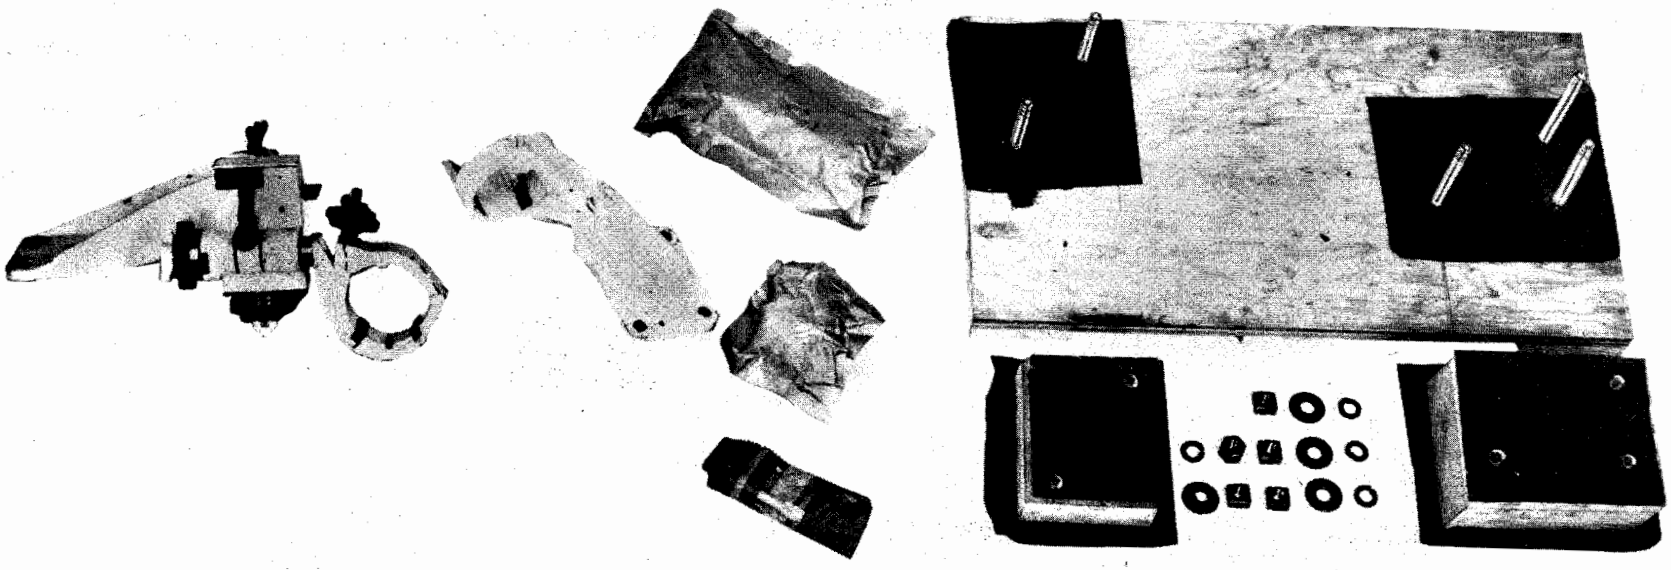


Neg.#22847-4 7-23-52 FRANKFORD ARSENAL ORD. CORPS

MOUNT, TELESCOPE T178 W/E - Prepackaged items and wood mounting base.

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.

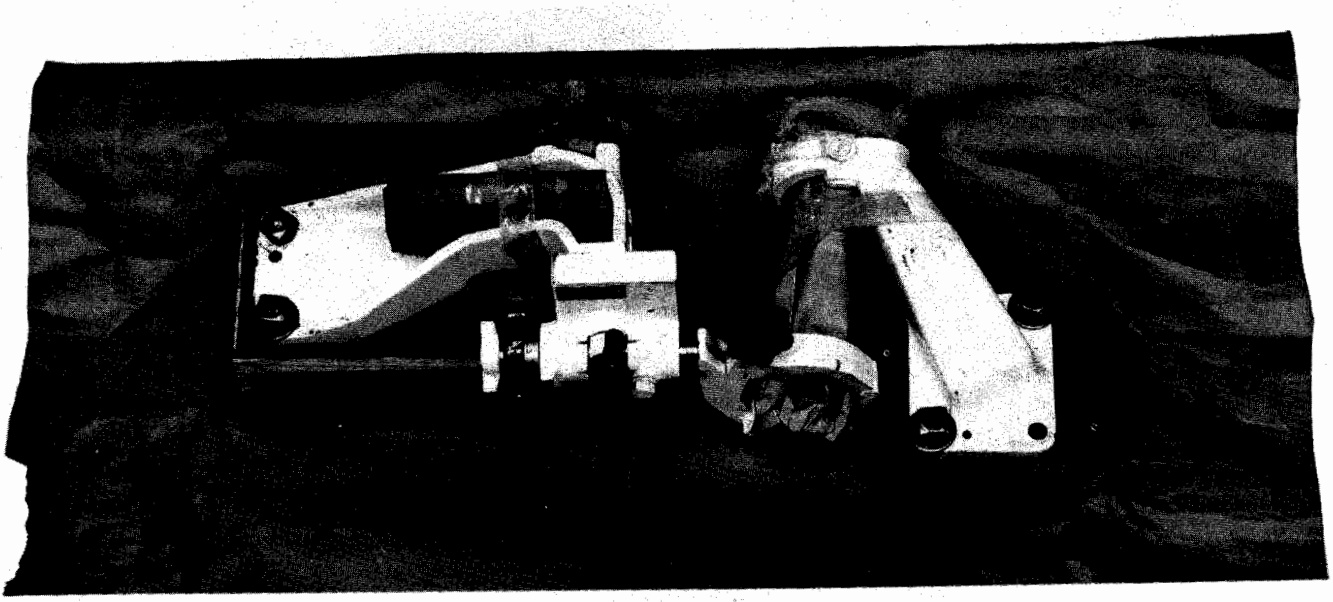

Neg.#22847-5 7-23-52 FRANKFORD ARSENAL ORD. CORPS

MOUNT, TELESCOPE T178 W/E - Prepackaged items secured to the mount and the mount bolted to the wood base prior to sealing the barrier material.

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.



Neg.#22847-6 7-23-52 FRANKFORD ARSENAL ORD. CORPS

MOUNT, TELESCOPE T178 W/E - Wood base containing bagged mount and prepackaged equipment, immobilized in shipping container with cleats in corners of box.

FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:31Z
Check the source to verify that this is the current version before use.