INCH-POUND

MIL-B-17910D(MC)
2 January 1990
SUPERSEDING
MIL-B-17910C(MC)
3 Nov 1977

MILITARY SPECIFICATION

BUCKLE, BRASS: FOR BELT, COAT, MAN'S

This specification is approved for use within the U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type and size of center bar brass buckle.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards handbook form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

FEDERAL

PPP-B-676 - Boxes, Setup.

MILITARY

MIL-B-17757 - Box, Shipping Fiberboard (Modular Sizes).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document of by letter.

AMSC N/A FSC 8315

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-151 - Metals; Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

MIL-STD-129 - Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Navy Publications and Forms Center (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Application for copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the standard sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection and approval (see 6.3) in accordance with 4.4.

3.3 Materials. The copper base alloy (red brass) shall be uniform in color and quality, and shall be free from scale (including red oxide), dents, nicks, pores, abrasions or any other defects which cannot be removed in subsequent finishing operations. When tested as specified in 4.6., the chemical composition of the copper base allow shall be 83.0 to 86.0 percent copper, 0.05 percent maximum lead, 0.05 percent maximum iron, 0.15 percent maximum total other elements and remainder percent zinc.

3.4 Design and construction. The buckle shall be stamped in one piece from the material specified in 3.3, and shall be in accordance with the design, detail, and dimensions shown on Figure 1.

3.5 Finish. Buckles shall be thoroughly cleaned, and one face and all outer edges shall be highly polished to a mirror-like finish. The opposite face (back) shall be given a satin finish. Barreling or tubbing shall not be permitted. Finished buckles shall be free from burrs and fins. The surfaces of the finished buckle shall be free from defects affecting the appearance, and shall match the color and finish of a sample (see 3.1) or an approved first article (see 3.2).

3.6 Identification marking. The manufacturer's name or trade name or trademark shall be permanently stamped on the center bar at back of buckle. The identification markings shall be stamped in such a manner that the surface opposite those markings shall show no signs of penetration or unevenness or cause distortion on any part of the buckle.

3.7 Workmanship. The finished buckle shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

Government. The Government reserves the right to perform serves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptance practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)

b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. The first article is submitted in accordance with 3.2 shall be inspected as specified in 4.5 for compliance with design, construction, workmanship and dimensional requirements of this inspection.

4.5 Quality conformance inspection.

4.5.1 Testing of component. In addition to the quality assurance provisions of the subsidiary specifications, testing shall be performed on the component listed in Table I for characteristics shown.

Table I - Testing of Components

Component & lot expressed in terms of	Characteristic	Rqmt. Para.	Test Method	Lot Nos. det. avg. S/U	Results rptd as	Sample Unit	Insp. Level
Copper base alloy (1 pound)	Chemical composition	3.3	4.6	X 2 (composite for each element)	To Nearest 0.1 percent	8 ozs (225g)	S-1

4.5.2 Examination of the end item. The end item shall be examined for the defects listed in 4.5.2.1 and 4.5.2.2. The sample unit shall be one buckle. Defects shall be as indicated below, except those with an asterisk (*) in classification column which shall be classified as listed below. The inspection level shall be II (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

Major defect - When seriously affecting appearance or serviceability.

Minor defect - When affecting appearance or serviceability but not seriously.

4.5.2.1 Examination for visual defects. Visual defects shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Color and finish	Does not compare favorably with standard or approved sample	101		
	Entire face surface or any outer edge not mirror-like finish	102		
	Back surface not satin finished		201	
	Surfaces not smooth		*	
	Discoloration or stain clearly noticeable		*	
	Abraded, scuffed, scratched or otherwise damaged		*	
Design	Any characteristic not in accordance with the specified requirements and Figure 1	103		
Material	Not fabricated of the specified material	104		
Construction and workmanship	Not one-piece stamping	105		
	Dent, pit, dig, gouge, nick, pores, metal mark, or mutilation		*	
	Distorted, bent, malformed, or otherwise impaired		*	
	Burr, fin, rough or sharp edge or corner that may damage fabric or cause injury		*	
	Metal cracked or fractured	106		
Identification marking	Missing, illegible, incorrect, not stamped or not placed in center bar at back of buckle			301
	Stamped markings penetrate to opposite face, cause unevenness or distortion on any part of the buckle	107		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

4.5.2.2 Examination for dimensions. Any dimension that is not within the specified tolerances shall be classified as a defect. The inspection level shall be S-2 (see 6.5).

4.5.3 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps; loose strapping, and inadequate stapling. Bulging or distortion of containers.
Weight and content (exterior and interior)	Number of intermediate container is more or less than required; gross/net weight exceeds requirements.

4.5.3.1 Examination for count of buckles in intermediate containers. Buckles packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (interior package). Any box containing less than the specified or marked quantity of buckles shall be classified as a defect. The inspection level shall be S-2 (see 6.5). The lot size shall be the number of intermediate containers presented.

4.6 Chemical composition test. Chemical composition shall be determined in accordance with test method III of FED-STD-151. Results shall be evaluated to determine compliance with the requirements specified in 3.3.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

5.1.1 Level A

5.1.1.1 Unit packaging. Each buckle shall be packaged in an end opening coin-type envelope made from kraft paper of minimum 20-pound (9 kg) basis weight (24 by 36-500). The size of the envelope shall be 2 1/2 by 1 1/2 inches (64 m by 38 m). The bag shall have the stock number, contract number and contractor printed on one side of the bag. As an alternate, each buckle may be placed in a clear polyethylene film bag with minimum of 0.001 inch thickness. The bag may be tuck-in closure or heat sealed. If heat sealing is used, excess air will be removed from the bag prior to sealing. A white paper label shall be inserted into each bag containing the stock number, contract number and contractor.

5.1.1.2 Intermediate. One hundred-sixty (160) buckles, unit packaged as specified in 5.1.1.1, shall be placed in a setup paperboard box constructed and closed to conform to type I, variety 1, class A, style 4 of PPP-B-676. The outside dimensions of the box shall not exceed 6 7/8 inches in length, 5 1/2 inches (140 m) in width, and 2 1/2 inches (64 m) in depth.

5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice provided it meets the requirements specified for commercial packing.

5.2 Packing. Packing shall be level A or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Twelve (12) set-up paperboard boxes (1920 buckles packaged as specified in 5.1.1) shall be packed six in length, two in width, and one in depth in a fiberboard shipping container conforming to class weather resistant, size No. 1A of MIL-B-17757, assembled, closed and reinforced as specified in the Appendix thereto.

5.2.1.2 Method 2. When specified (see 6.2), 12 level A shipping containers (23,040 buckes) shall be overpacked in a fiberboard shipping container conforming to class weather resistant, size No. 4 of MIL-B-17757, assembled, closed and reinforced as specified in the Appendix thereto.

5.2.2 Commercial. Buckles, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, the U. S. Postal Service Manual and National Motor Freight Classification or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, unit and intermediate packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The buckle covered by this specification is for wear with men's coat belts.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Whether first article is required (3.2).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
d. When level A, method 2, packing is required (see 5.2.1.2).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209 and the requirements of this specification. The sample(s) presented for inspection may be first articles, preproduction samples, first production of sample(s) taken from the first lot depending on the contractors history and will be as directed by the Contracting Officer. The Contracting Officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.4 Standard samples and shade samples. For information regarding availability of sample buckles, address inquiry to acquiring activity issuing the invitation for bids.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 15.0 for total (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packing examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.6 Subject term (keyword) listing.


Dress
Enlisted
Officer
Polished
Service

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

Preparing Activity
Navy - MC
Project No. 8315-N344

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.

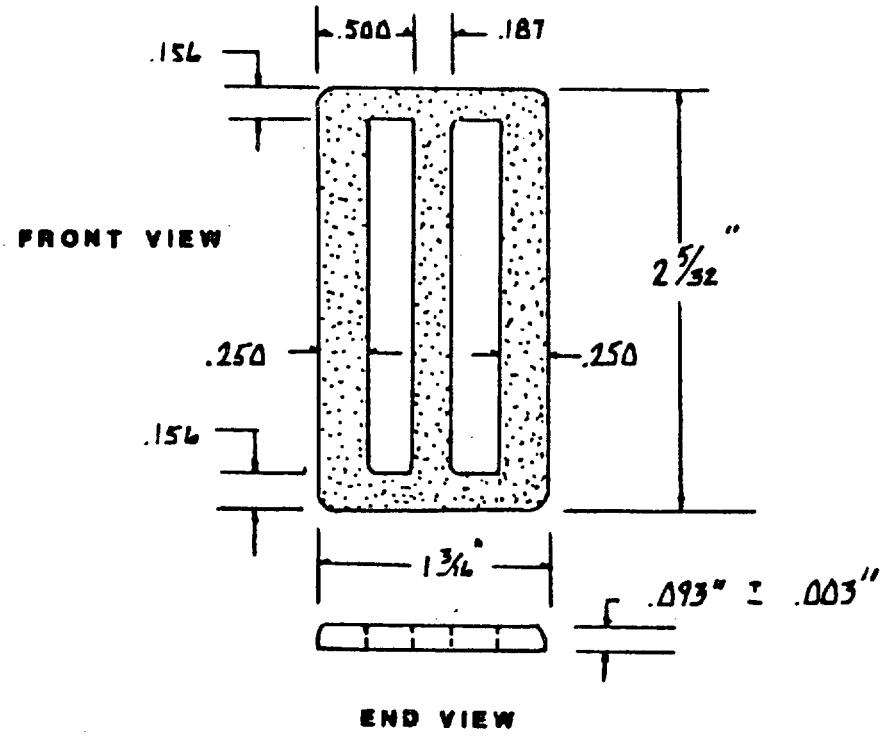

TOLERANCES:

FRACTIONS ± 1/64"

DECIMALS ± .005"

NOTE: ALL CORNERS AND EDGES SHALL BE SLIGHTLY BEVELED

FIGURE 1. BUCKLE, BRASS: FOR BELT, COAT, MAN'S.

☆U.S. GOVERNMENT PRINTING OFFICE: 1990 - 704-034/30320

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:44Z
Check the source to verify that this is the current version before use.