MIL-C-17864C(MC)
23 August 1972
SUPERSEDING
MIL-C-17864B(MC)
7 June 1965

MILITARY SPECIFICATION

CARRIER, PISTOL HOLSTER: COTTON DUCK; WHITE (MP)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

*1.1 This specification covers requirements for one type and size pistol holster carrier made of white cotton duck.

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-yarns, Army And Numbered.
CCC-D-950	-	Dyeing And Aftertreating Processes For Cotton Cloths.
DDD-L-20	-	Label, For Clothing, Equipage, And Tentage, (General Use).

MILITARY

MIL-G-16491	-	Grommet, Metallic.
MIL-B-17757	-	Boxes, Fiber, Corrugated (Modular Sizes).
MIL-T-43566	-	Tape, Textile, Cotton, General Purpose, Natural Or In Colors.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitch, Seam And Stitching.

MILITARY

MIL-STD-105 - Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129 - Marking For Shipment And Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Sample. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a finished carrier shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production item.

3.3 Materials.

*3.3.1 Cloth, cotton, duck. The cloth, before bleaching, shall be No. 8 hard texture, conforming to type I of CCC-C-419. The cotton duck shall be bleached white in accordance with type V, class C of CCC-D-950.

*3.3.2 Tape. The tape for binding the raw edges of the carrier shall be cotton, white (bleached), 3/4 or 7/8 inch width at the option of the supplier, conforming to type I, class 2 of MIL-T-43566.

3.3.3 Grommets. Grommets with washers shall be brass, plain type, bright finish, conforming to type I, class 1, size No. 1 of MIL-G-16491.

3.3.4 Thread. The thread for seaming, stitching and bartacking shall be cotton, white, bleached, conforming to V-T-276; type IB2, glazed finish, ticket No. 16, 4 ply for needle and ticket No. 20, 4 ply for bobbin or looper.

*3.4 Design. The carrier shall be the U. S. Marine Corps design shown on Figure 1 consisting of a single piece of duck folded and seamed to specified size and shape. The raw edges shall be bound with cotton tape and the carrier shall be provided with grommets for attaching the pistol holster.

*3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard pattern shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The supplier's working patterns shall be identical to the standard patterns.

*3.5.1 List of pattern parts. Carriers shall be cut from the specified material in accordance with pattern parts indicated:

Material: Cloth, duck, cotton

Item	Pattern parts	No. of cut parts
1	Body	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

*3.6 Construction.

*3.6.1 Manufacturing requirements. The carriers shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I.

*3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the carriers.

*3.6.1.2 Stitches, seams, and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

*3.6.1.3 Tacking and backstitching. Ends of seams and stitching shall be securely backtacked not less than 1/4 inch when not caught in other stitching. Thread breaks in stitching shall be backstitched not less than 1/2 inch at each break. Thread tension shall be maintained so that there will be no loose stitching and that the lock will be embedded in the center of the material sewed.

*3.7 Finished measurements. The finished carrier shall conform to the measurements shown on Figure 1.

*3.8 Marking. The identification marking shall be applied in the location shown on Figure 1 and shall conform to type IV, class 5 of DDD-L-20.

*3.9 Workmanship. The finished carrier shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels (AQL).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:41Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Carrier shall be cut in strict accordance with pattern furnished by the Government. b. The material shall be cut in the direction indicated by directional lines on the pattern.					
2.	Replacement of damaged parts. a. Replace at time of cutting all parts containing damages, such as holes or serious weakening defects, such as smashes, multiple floats, and slubs likely to develop into a hole. b. Replace all parts damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, or mends.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:41Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
3.	Fold and seam. a. Fold the carrier lengthwise in accordance with notches. Turn under one edge 3/8 inch and lap the turned under edge on top with raw edges even and seam edges through all plies 1/16 inch from the folded edge at center of carrier as shown in Figure I.	301	LSB-1	8-10	16/4	20/4
4.	Sew on binding. a. Fold the seamed duck end to end with center seam between the fold. Position the binding on the cut end of one side of the carrier to lap the raw edges; the folded width of the webbing shall be equal on both sides of the finished carrier and the cut ends of the binding shall extend 3/8 to 1/2 inch beyond the folded edges of the duck at each side of the carrier.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:41Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
	b. Stitch the binding to the carrier through all plies of duck 1/8 inch from selvage edge of webbing, turning under each end of the binding tightly and smoothly over the folded side edges of the carrier and securely catching the turned ends in the stitching.	301	LSa-1	8-10	16/4	20/4
	c. Fold the binding tightly and smoothly over the raw edges of the duck to the other side of the carrier and stitch the binding to the carrier through all plies 1/16 inch from selvage edge of webbing. The ends of the stitching at both ends of the finished binding shall be securely tacked.	301	BSa-1	8-10	16/4	20/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
5.	Set grommets. a. The grommets and washers, positioned at the locations shown in Figure 1, shall be securely clinched through all plies of the duck without splitting. Both washers shall be placed on the same side of the carrier.					
6.	Bartack a. Make a 1/2 ±1/32 inch long and 3/32 ±1/32-inch-wide horizontal bartack through all plies not more than 1/4 inch above each grommet(see Figure 1). Bartacks shall be free of thread breaks and loose stitching.	Bar-tack		28 per bartack	16/4	20/4
7.	Clean carrier. a. Trim all ends of stitching and remove all loose ends of thread from carrier. Remove all spots and stains.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.2 Inspection. Inspection shall be in accordance with MIL-STD-105 except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be performed on a completely fabricated carrier for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

*4.2.2.1 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

*4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.1 and 4.2.3.2. The sample unit shall be one carrier.

*4.2.3.1 General defects. General defects shall be classified as follows:

EXAMINE	DEFECT	CLASSIFICATION MAJOR	MINOR
Cotton duck	Any hole, cut, or tear	X	
	Other fabric defects:		
	-seriously affecting serviceability or appearance	X	
	-affecting serviceability or appearance but not seriously.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION MAJOR	MINOR
Tape	Edges frayed or scalloped; not firmly or tightly woven.	X	
Grommets with washers	Broken or malformed; burrs or sharp edges which may cause injury in handling or damage to material.	X	
	Finish partly or totally omitted; any corroded area.	X	
	Not securely clinched or clinched too tightly, cutting surrounding fabric.	X	
Seams and stitching	Open seams.		
	-1/2 inch or less.		X
	-More than 1/2 inch.	X	

NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken, or when two or more continuous skipped stitches or run-offs occur.

	Run-offs (see open seams)		
	Wrong seam or stitch type.	X	
	Stitch tension loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in tightness of seams.		X
	Stitches per inch (except on bartacks)		
	-One stitch less than minimum specified.		X
	-Two or more stitches less than minimum specified.	X	
	-One or more stitches in excess of maximum specified.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION MAJOR	CLASSIFICATION MINOR
	NOTE: Variation in the number of stitches per inch, caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy seams or heavy places shall be classified as follows:		
	(a) Within the Major defect classification - Minor defect		
	(b) Within the Minor defect classification - No defect		
	On bartacks		
	Not as specified.		X
	Misplaced:		
	-seriously affecting serviceability.	X	
	-affecting serviceability but not seriously.		X
	Stitching margin not as specified, affecting serviceability or appearance.		X
	Stitching ends and thread breaks not backstitched as specified.		X
	NOTE: Thread breaks not backstitched shall be classified as open seams.		
Components and assembly	Any imperfection of component or fabrication which will:		
	-seriously affect serviceability or appearance.	X	
	-affect serviceability or appearance but not seriously.		X
	Any required component or part of carrier omitted.	X	
	Needle chews, mends, or darns.	X	
	Seams or binding badly puckered or pleated.		X
	Binding improperly or loosely applied.		X

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:41Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION MAJOR	CLASSIFICATION MINOR
	Ends of binding not finished as specified.		X
Cleanness	Spots or stains not removed or not removable.	X	
	Thread ends not trimmed throughout.		X

*4.2.3.2 Finished measurements. Any dimension not within the tolerances specified on Figure 1 shall be classified as a defect.

*4.2.3.3 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.1

Inspection Level II of MIL-STD-105

	AQL
Major	2.5 DHU
Total Major and Minor (combined)	6.5 DHU

4.2.3.2

Inspection Level S-3 of MIL-STD-105

One class	6.5 DHU

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of carriers per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Ten carriers shall be stacked one on top of another with the carriers alternated end to end. The bundle shall then be securely tied with cotton tape or twine.

*5.1.2 Level C. Carriers shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

*5.2.1.1 Method 1. Five hundred (500) carriers (50 bundles of carriers packaged as specified in 5.1.1), shall be packed in a fiberboard shipping container with liner conforming to class weather resistant, size No. 2A of MIL-B-17757. The contents of the container shall be covered on top and bottom with 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Shipping containers shall be assembled, closed and reinforced as specified in the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

*5.2.1.2 Method 2. When specified (see 6.2), six level B shipping containers(3,000 carriers) shall be overpacked in a fiberboard shipping container conforming to class weather resistant, size No. 4 of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix to the box specification.

*5.2.2 Level B. Five hundred (500) carriers (50 bundles of carriers packaged as specified in 5.1.1) shall be packed in a fiberboard shipping container with liner conforming to class domestic, size No. 2A of MIL-B-17757; the fiberboard used to fabricate box shall be grade 275. The contents of the container shall be covered on top and bottom with 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Shipping containers shall be assembled, closed and reinforced as specified in the appendix to the box specification.

5.2.3 Level C. Carriers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

*5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with requirements of MIL-STD-129.

6. NOTES

*6.1 Intended use. The carrier is worn on the white web belt by military police of the Marine Corps.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.

(b) Whether first article is required (see 3.2).

(c) Selection of applicable levels of packaging and packing (5.1 and 5.2).

(d) When level A, method 2, packing is required (see 5.2.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.


6.3 Samples. For information regarding availability of sample carrier, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8465-N545

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:41Z
Check the source to verify that this is the current version before use.

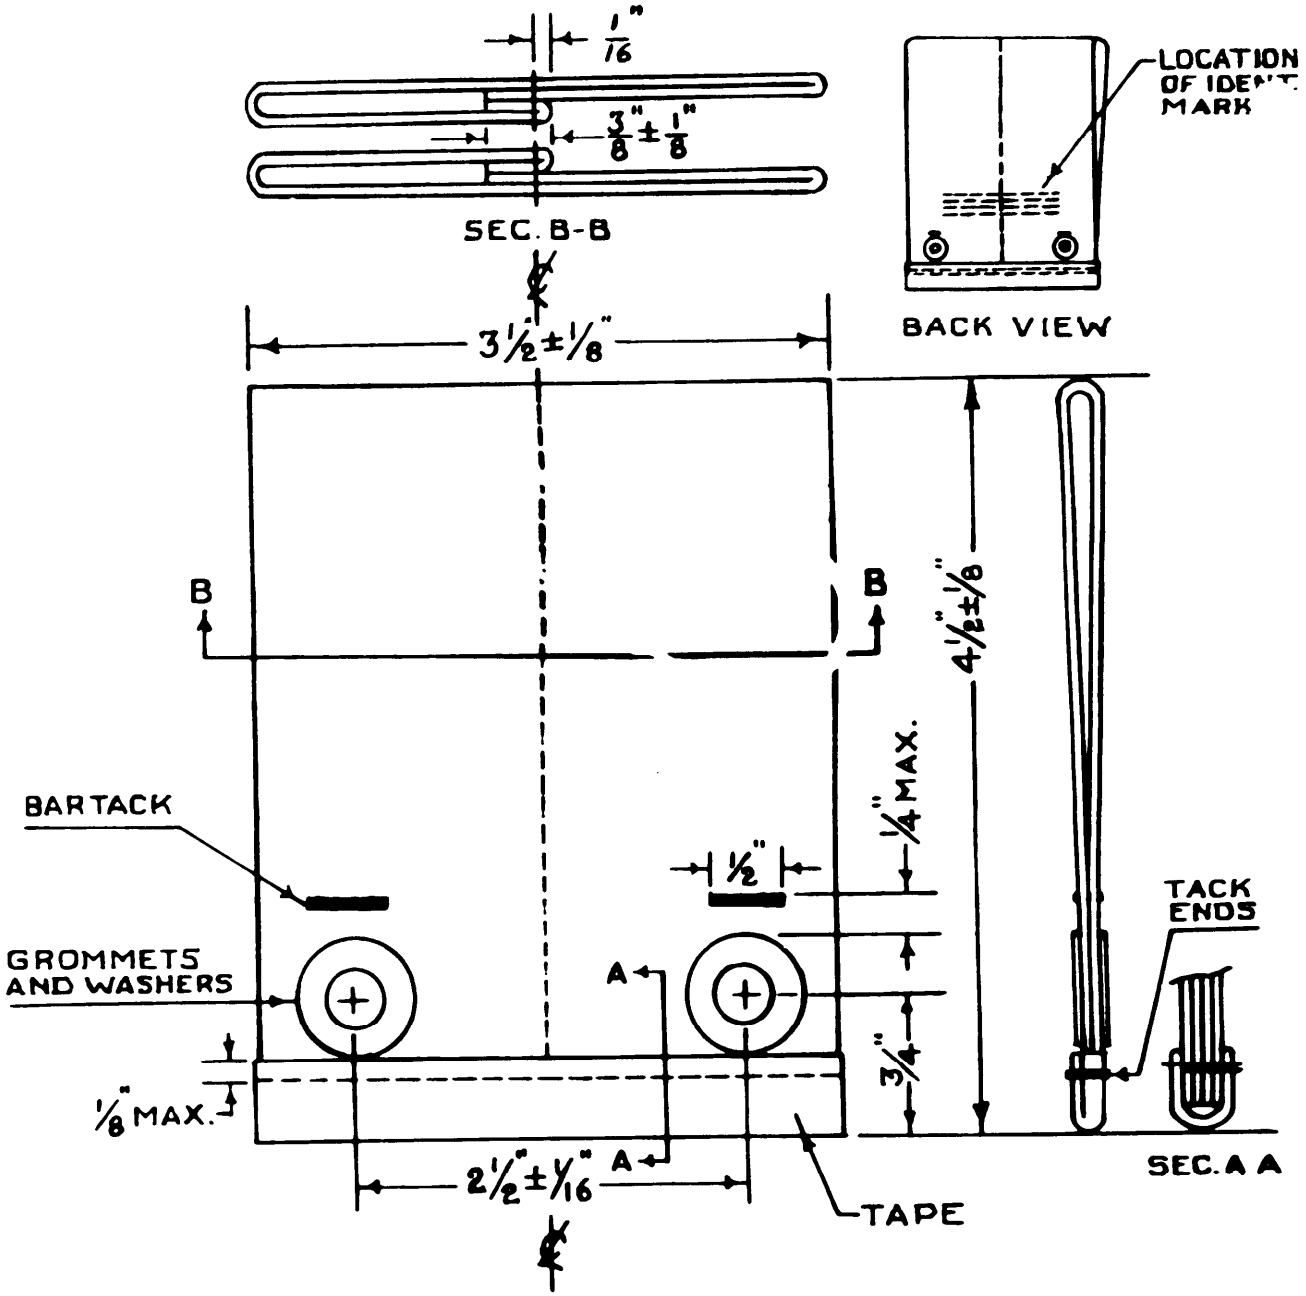

UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS FOLLOWS:

FOR LOCATION DIMENSIONS:	
1/2" OR LESS	± 1/32"
MORE THAN 1/2" BUT NOT MORE THAN 2"	± 1/16"
MORE THAN 2" BUT NOT MORE THAN 6"	± 1/8"
MORE THAN 6"	± 1/4"
FOR COMPONENT DIMENSIONS:	
MORE THAN 3"	± 1/16"
MORE THAN 3" BUT NOT MORE THAN 6"	± 1/8"
MORE THAN 6"	± 1/4"
FOR STITCHING MARGINS:	± 1/32"

FIG. 1. CARRIER, PISTOL HOLSTER: COTTON DUCK; WHITE (M.P.)

M.C.S.A. 826: R.G.F. 23 Aug '72

Source: https://assist.dla.mil -- Downloaded: 20260-18T10:41Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:41Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

DoD-317

OFFICIAL BUSINESS

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:41Z
Check the source to verify that this is the current version before use.