MIL-C-17889D(MC)
18 January 1974
SUPERSEDING
MIL-C-17889C(MC)
19 December 1967

MILITARY SPECIFICATION
COAT, SHOOTER'S: COTTON, SATEEN, GREEN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

*1.1 Scope. This specification covers requirements for a green cotton sateen shooter's coat.

*1.2 Classification. The coat shall be of one type in the following sizes, as specified (see 6.2):

Schedule of sizes

Small	Medium	Large	Extra Large

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified therein.

SPECIFICATIONS

FEDERAL

C-F-206	- Felt, Sheet, Cloth, Felt, Wool, Pressed.
V-B-871	- Button, Sewing Hole, And Button, Staple, (Plastic).
V-T-276	- Thread, Cotton.
V-T-280	- Thread, Cotton Gimp, Buttonhole.
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army And Numbered.
CCC-D-950	- Dyeing And Aftertreating Processes For Cotton Cloths.
DDD-L-20	- Label; For Clothing, Equipage, And Tentage, (General Use).
DDD-T-86	- Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, Or Dyed).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-368	- Cloth, Satin, Rayon And Cloth, Twill, Rayon.
MIL-C-10296	- Cloth, Sateen, Cotton.
MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-751	- Stitch, Seam And Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article consisting of the number of finished coats specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

*3.3.1 Basic material. The basic material for the coat shall be cloth, cotton, sateen, 8.2 ounce, olive green shade 107 (see 6.3), conforming to class 1 of MIL-C-10296.

3.3.2 Bias binding. The binding for the raw edge of seam joining the front part of the bellows to back shall be 1-1/8 inches wide, bias-cut of cloth, rayon, twill, 3.7-ounce, green shade 2208 (see 6.3), conforming to class 1 of MIL-C-368

*3.3.3 Tape. The tape for reinforcing the neckline of the fronts shall be cotton, 1/4-inch-wide, conforming to type III, class 1 of DDD-T-86.

3.3.4 Elbow, shoulder, and pulse pads.

*3.3.4.1 Cover. The cover for the elbow, shoulder, and pulse pads shall be cloth, cotton, duck, 8.25 ounce per square yard, conforming to type III of CCC-C-419. The cotton duck shall be vat dyed olive drab, shade 7, and shall be water-resistant treated to meet the requirements specified for type I, class B of CCC-D-950.

3.3.4.2 Padding. The padding for the elbow, shoulder, and pulse pads shall be felt, 1/4 inch thick, conforming to type I, classification number 8R, class 5 of C-F-206.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

*3.3.5 Thread. The thread for all seaming and stitching shall be cotton machine twist, conforming to V-T-276. The type, size and finish of the thread shall conform to the following:

Operation	Type	Thread size		Finish
		Needle	Bobbin or Looper	
Make elbow, shoulder and pulse pads:	IB3	16/4	20/4	glazed
Seam and stitch coat, set pads, overedge stitch:	IA3	40/3	40/3	soft
Make buttonholes and bartacks:	IC2	A/3	A/3	mercerized
Sew on buttons:	IB3	24/4	24/4	glazed

The thread shall be dyed green shade S-1, cable No. 66022. The dyed thread shall show good fastness to laundering, chlorine bleaching, and light when tested as specified in V-T-276.

*3.3.6 Gimp. The buttonhole gimp shall be cotton, size No. 8, soft or glazed finish, conforming to type I or II of V-T-280. The gimp shall be dyed green, shade S-1, cable No. 66022. The dyed gimp shall show good fastness to laundering and chlorine bleaching when tested as specified in V-T-280.

*3.3.7 Buttons. Buttons shall conform to type II, class D, melamine formaldehyde composition, glossy finish, style 20 or 21, 30-line, of V-B-871. The color of buttons shall be green cable No. 62017.

*3.3.8 Labels. Each coat shall have an identification and size label as follows. The coat is intended to be laundered and the labels shall show fastness to laundering.

*3.3.8.1 Identification label. The identification label shall conform to type I, class 1 of DDD-L-20 and shall measure not less than 2-3/4 by 1-1/2 inches. The content and format shall be as follows:

Nomenclature (Item description)
Contract number
Name of contractor

*3.3.8.2 Size label. The size label shall conform to type I, class 2 of DDD-L-20 and shall measure not less than 1-1/2 inches by 1 inch. The label shall consist of the coat size (see 1.2) indicated by letters S, M, L or XL for Small, Medium, Large and Extra Large, and the stock number, as shown in the following example:

M
Stock Number

The stock number may be omitted rrom the size label, but when omitted, it shall be included in the identification label.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

*3.3.8.3 Identification and size markings. In lieu of cotton cloth labels, the required identification and size information may be marked on the coat by heat transfer (decalcomania), direct printing or stamping. The marking shall conform to type III or type IV, class 1 and class 2 of DDD-L-20.

*3.4 Design. The coat shall be the U.S. Marine Corps design shown in Figures 1 and 2, a single breasted, unlined coat with a five-button front closure having cut-on front facings; a cardigan type neck; a two-piece back with bellows at each side and a set-on half belt; one-piece sleeves with elbow pads positioned to protect elbows while in firing position; an upper patch pocket on left front with flap to button; a shoulder pad on right front; a pulse pad on the left sleeve, and double-lapped and double-stitched shoulder, armhole, sleeve, and side seams.

3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The supplier's working patterns shall be identical to the standard patterns. The standard patterns provide 1/2 inch allowance for double-lapped and double-stitched seams and 1/4-inch allowance for all other seams except as otherwise specified in Table I. Standard patterns show size, seam allowance, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts.

*3.5.1 List of pattern parts. The coat shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern nomenclature Material: Cloth, cotton, sateen	No. of cut parts
1.	Front	2
2.	Back	2
3.	Sleeves	2
4.	Pocket	1
5.	Pocket flap	2
6.	Belt	1
7.	Neck facing	1
8.	Bellows back	2
	Material: Cloth, cotton duck	
9.	Shoulder pad cover (front)	1
10.	Shoulder pad cover (sleeve)	1
11.	Pulse pad cover	1
12.	Elbow pad cover (right)	1
13.	Elbow pad cover (left)	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Item	Pattern nomenclature Material: Padding	No. of cut parts
14.	Shoulder pad	1
15.	Pulse pad	1
16.	Elbow pad (right)	1
17.	Elbow pad (left)	1
	Marker	
18.	Buttonhole marker	
	Shaper	
19.	Finished pocket shaper	
20.	Finished pocket flap shaper	

3.6 Construction.

*3.6.1 Manufacturing requirements. The coat shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I.

*3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the coats.

3.6.1.2 Stitches, seams and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Where stitch type 401 is used the looper (underthread) shall be on the inside of the coat. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. Overedge stitching shall be done on a serging machine with a knife attachment properly set to trim the raw edge without cutting the material.

3.6.1.2.1 Tacking and backstitching. Ends of seams and stitching produced with stitch type 301, when not caught in other seams or stitching, shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. When stitch type 401 is used, ends of seams and stitching shall be caught in other seams or rows of stitching and skipped stitches and thread breaks may be repaired using stitch type 301 backstitched not less than 1/2 inch on each side of skip or break.

*3.6.1.3 Shade marking. The cotton sateen parts of the coat, except the neck facing which may be cut from ends, shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on shade tickets.
(c) Adhesive type tickets whose adhesive shows discoloration and whose adhesive mass adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut the coats in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by directional lines on the patterns. c. Cut the cotton sateen parts of the coat from one piece of basic material, except the underply of pocket flaps and the neck facing may be cut from ends. The cloth shall be cut with the filling side to finish on the outside of the coat.					
2.	Replacement of damaged parts. a. Replace, at time of cutting, all parts containing damages such as holes or seriously weakening defects such as smashes, multiple floats and slubs likely to develop into holes. b. Replace all parts damaged during the manufacturing process by needle chews which may be expected to develop into holes, scissor or knife cuts, tears, holes, mends, burns or large exposed drill holes.					
3.	Shade marking. a. Mark or ticket (see 3.6.1.3) all component parts cut from one piece of cotton sateen cloth, to insure uniform shade and size throughout the coat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
4.	Make elbow and pulse pads. Finished appearance. The elbow and pulse pads shall finish smooth and flat, shall be well shaped and uniformly stitched. a. The pads shall be made of one ply of cotton duck padded with a single thickness of felt.					
	b. Center the felt padding on the cotton duck cover and cross-stitch the two parts together with two double rows of stitches 1/4-inch gage. The double rows of stitches shall cross each other at the approximate center of the pad (see Figures 1 and 2).	301	SSv-2 (each row)	6-8	16/4	20/4
	c. Smoothly turn the raw edges of the cover to the underside over the edges of the padding. Seam the cover to the padding along the edges with a double row of stitches, catching the turned under portion of the cover in the stitching. The double row of stitches shall be 1/4-inch gage with the outer row uniformly 1/8 inch from the edges. The turned under portion of the cover shall be pleated or gathered where necessary, while stitching, in order to effect smooth edges.	301	SSw-2 (double row of stitches)	6-8	16/4	20/4
	d. On the finished coat, the pads shall conform to the measurements shown in Figures 1 and 2 for the elbow and pulse pads.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
5.	Make shoulder pad. Finished appearance. The shoulder pad shall finish smooth and flat, shall be well shaped and uniformly stitched. a. The pad shall be made of two pieces of cotton duck padded with a single thickness of felt.					
	b. Position the two pieces of cotton duck together face to face with raw edges even and notches matching. Stitch together with a 1/2-inch seam from upper edge of cover to upper end of cutout.	301	SSa-1	10-14	40/3	40/3
	c. Spread open the seam and center the felt padding on the cotton duck cover with armhole slits aligned. Cross-stitch the two parts together with two double rows of stitches 1/4-inch gage. The double rows of stitches shall cross each other at the approximate center of the pad (see Figure 1).	301	SSv-2 (each row)	6-8	16/4	20/4
	d. Smoothly turn the raw edges of the cover to the underside over the edges of the padding and armhole slit. Seam the cover and padding together along the edges with a double row of stitches, catching the turned under portion of the cover in the stitching. The double row of stitches shall be 1/4-inch gage with the outer row uniformly 1/8 inch from edges. The turned under portion of the cover shall be pleated or gathered where necessary, while stitching, in order to affect smooth corners and points.	301	SSw-2 (a) (double row of stitches)	6-8	16/4	20/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
	Make shoulder pad. (cont'd)					
	e. Backstitch across the top of the armhole slit.					
	f. On the finished coat, the shoulder pad shall conform to measurements shown on Figure 1.	301	SSa-1	6-8	16/4	20/4
6.	Make pocket flap.					
	Finished appearance. The pocket flap, which shall be made of two plies of basic material, shall finish smooth and flat, shall be well shaped with point and corners completely forced out and shall be uniformly stitched without pleats, twists puckers, or raw edges. The buttonhole shall be clean cut, well made, properly positioned, well worked over gimp to fit a 30-line sewing hole button and the stitching shall be securely caught in the basic material. The purling of the buttonholes shall be on the outside of the flap. The ends of the buttonhole shall be securely tacked.					
	a. Seam the two plies together 1/4 inch from side and bottom edges with edges even.	301	SSe-2 (a)	10-14	40/3	40/3
	b. Turn the flap, completely working out the corners and point. Edgestitch the flap uniformly 1/8 inch from the seamed edges.	301	SSe-2 (b)	12-16	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
6.	Make pocket flap. (cont'd)					
	c. Overedge stitch together the upper raw edges of the flap.	503 or 504	SSa-1	10-14	40/3	40/3
			SSa-1	10-14	40/3	40/3
	d. Make a vertical, eyelet-end, taper-bar type buttonhole, cut 3/4 inch long, through the center of flap with the inside edge of the buttonhole eyelet 5/8 ±1/8 inches above the center point and with the purling of the buttonhole to finish on outside of the flaps.	Button-hole		60 per button-hole (minimum)	A	A
	e. On the finished coat, the pocket flap shall be 6 ±1/8 inches wide, 1-7/8 ±1/8 inches long each side and 2-7/8 ±1/8 inches at the vertical center from top edge of flap to point.					
7.	Make pocket.					
	Finished appearance. The hem of the pocket shall finish smooth and flat, without twists, pleats, or puckers. The pocket shall be uniform in shape and size in accordance with pattern.					
	a. Hem the top edge of pocket, in accordance with the notches on pattern, with two rows of stitches 1/4-inch gage and with the outer row 1/16 inch from folded edge.	301 or 401	EFa-2	10-14	40/3	40/3
			EFa-2	10-14	40/3	40/3
	b. Turn under and crease side and bottom edges of pocket in an edge creasing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Make pocket. (cont'd) c. On the finished coat, the pockets shall be 6-3/4 ±1/8 inches long when measured at the vertical center and 6 ±1/8 inch wide when measured along the top edge.					
8.	Hem neck facing. Finished appearance. The hem shall be uniformly stitched, uniform in width and shall finish smooth and flat, without twists, pleats, puckers or other distortions.					
	a. Turn under the lower edge of neck facing 1/4 to 3/8 inch and single stitch 1/16 to 1/8 inch from folded edge	301	EFa-1	10-14	40/3	40/3
9.	Make bellows back. Finished appearance. The binding shall be uniformly stitched, shall not be tight or full causing puckers, gathers, or pleats; the basic material and both edges of the binding shall be securely caught in the stitching. The center back seam shall be carefully joined and the gage of stitching shall be uniform.					
	a. Properly position the right and left front part of bellows on the outside of the respective back with notches matching. Seam together with a 3/16-to 1/4-inch seam.	301	SSa-1	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
9.	Make bellows back. (cont'd)					
	b. Bind the raw side edge of the two parts of the bellows together from the waist to the shoulder edge of backs, with 1-1/8-inch-wide bias binding. Both edges of binding shall be turned under and caught in the stitching 1/16 inch from inner folded edges.	301	BSc-1	10-14	40/3	40/3
	c. Turn the left and right backs to the inside, in accordance with notches on pattern, to form the bellows. Topstitch the back 1/8 inch from the folded edge.	301	OSf-1	10-14	40/3	40/3
	d. Secure the bellows to the back at the shoulders with a row of stitches 1/8 inch from raw edge.	301	SSa-1	10-14	40/3	40/3
	e. Securely tack the lower end of left and right bellows to the respective back for a distance of not less than 1 inch from the lower end. The tacking shall be 1/8 to 3/16 inch from the raw edge.	301	SSa-1	10-14	40/3	40/3
	f. Join the left and right back at the center with a double-lapped and double-stitched seam and with the left back over the right. The double row of stitches shall be 1/4-inch gage with the outer row 1/16 inch from the finished edge.	301	LSc-2	10-14	40/3	40/3
		or 401	LSC-2	10-14	40/3	40/3
10.	Seam belt to coat.					
	Finished appearance. The belt shall be properly positioned and seamed to the back of coat and shall finish smooth and flat without puckers, pleats, or raw edges and gage of stitching shall be uniform in width.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
10.	Seam belt ot coat. (cont'd)					
	a. Position belt on outside of back at the notches. Seam top and bottom edges of belt to the back, turning under the raw edges of the belt and catching the turned under portion in the stitching 1/8 inch from the folded edges.	301	LSd-1 (each edge)	10-14	40/3	40/3
	b. On the finished coat the belt shall be 2 ±1/8 inches wide.					
11.	Hem facings, sew on label.					
	Finished appearance. The hem shall be uniformly stitched, uniform in width and shall finish smooth and flat without twists, gathers, puckers or pleats. The identification label shall be properly positioned and securely sewn to the right facing.					
	a. Hem the back edge of facings 1/4 inch, with the stitching 1/8 inch from folded edge.	301	EFa-1	10-14	40/3	40/3
	b. Position the identification label on the outside of the right facing midway between the front and back folded edges and with the front end of the label approximately 6-1/2 inches above the unfinished bottom edge of facing (see operation 28. a). Stitch the label to the facing only, 1/8 inch from each edge.	301	SSa-1	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
12.	Set breast pocket flap and pocket.					
	Finished appearance. The breast pocket flap and pocket shall be properly set and uniformly stitched without twists, gathers, pleats, puckers or raw edges. Front edge of flap and pocket shall be in parallel alignment with front edge of coat. Top edge of flap shall be at right angle to front edge of coat when buttoned. The side edges of the pockets shall not be exposed beyond the sides of pocket flaps.					
	a. Position the pocket flap on the outside of the left front in accordance with marks on patterns. Seam the flap to the front 1/4 inch from overedge stitched edge.	301	LSq-2 (a)	10-14	40/3	40/3
	b. Turn down and topstitch the flap uniformly 1/8 inch from the raised edge.	301	LSq-2 (b)	10-14	40/3	40/3
	c. Position pocket on the outside of the left front with top edge 5/8 ±1/8 inch below top edge of flap and with the vertical center of pocket in line with buttonhole in flaps.					
	d. Seam pocket to front uniformly 1/8 inch from side and bottom edges.	301	LSd-1	10-14	40/3	40/3
13.	Seam shoulders.					
	Finished appearance. The fronts and back shall be carefully joined at the shoulders and shall finish smooth and flat without twists, puckers, pleats or raw edges. The gage of the stitching shall be uniform.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
13.	Seam shoulders. (cont'd)					
	a. Join back to fronts at shoulders with a double-lapped and double-stitched seam. The double row of stitches shall be 1/4-inch gage with the outer row 1/16 inch from finished edge. The back shall be over the fronts.	301	LSc-2	10-14	40/3	40/3
14.	Set front and neck facing.					
	Finished appearance. The neck facing shall be uniformly stitched to the coat and shall finish smooth and flat without twists, puckers, pleats, or raw edges.					
	a. Turn front facing in accordance with notches on pattern to outside of fronts. Position neck facing to outside of coat with upper front ends lapped on upper back edge of front facing and with notches matching the center back seams. Seam front facings to the fronts at the gorge, catching the 1/4-inch tape in the gorge area, and continue to seam neck facing to front and back along neckline catching the back edge of front facing in the seam. The stitching shall be uniformly 1/4 inch from the raw edges. The tape shall extend from approximately 1 inch from the shoulder edge of fronts to approximately 1-1/2 inches from the front edge.	301	SSe-2 (a)	10-14	40/3	40/3
15.	Edgestitch coat.					
	Finished appearance. The coat shall be uniformly edgestitched the same gage as pocket flap and pocket.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
15.	Edgestitch coat (cont'd)					
	a. Turn front facings and neck facing to inside of coat, working the corners and seamed edges out completely and lapping back edge of front facing on front end of neck facing. Edgestitch the front and neck 1/8 inch from the folded front and seamed top edges, respectively.	301	OSf-1 (front edges) SSe-2 (b) (top edge)	10-14	40/3	40/3
16.	Stitch down front facing and neck facing.					
	Finished appearance. The front and neck facings shall finish smooth and flat without twists, puckers, pleats or other distortions.					
	a. Stitch back edge of facing to fronts as close as possible to, but not on top of, the stitching for the hem of the facing.	301	LSd-1	10-14	40/3	40/3
	b. Stitch lower edge of neck facing to fronts and back with the size label properly positioned at the center-back and the top edge caught in the seam. The stitching shall be as close as possible to, but not on top of, the stitching for the hem of the neck facing.	301	LSd-1	10-14	40/3	40/3
	c. In lieu of the cloth size label, the size may be marked on the coat (see operation 29.a).					
17.	Make buttonholes.					
	Finished appearance. Buttonholes shall be clean cut, well made, properly positioned,					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
17.	Make buttonholes. (cont'd) well worked over gimp to fit a 30-line sewing hole button and the stitching shall be securely caught in the basic material. The purling of the buttonholes shall be on the outside of the coat. The ends of the buttonholes shall be securely tacked. a. Mark the left front in accordance with the buttonhole marker for the location of five buttonholes. b. Make a horizontal, eyelet-end, taper-bar type buttonhole, cut 3/4 inch long, at each mark. The inside edge of the buttonhole eyelet shall be 5/8 to 3/4 inch from the front edge of coat.	Buttonhole		60 per buttonhole (minimum)	A	A
18.	Mark for buttons. a. Mark the right front for the location of five 30-line sewing hole buttons to properly engage buttonholes in left front. On the finished coat, the center of the buttons shall be 7/8 ±1/8 inch from front edge. b. Mark the pocket for the location of one 30-line sewing hole button to properly engage buttonhole in pocket flap.					
19.	Sew on buttons. Finished appearance. The buttons shall be securely sewn to the coat with the end of the stitching securely tacked. The buttons shall be properly aligned with buttonholes without distortion to the front or pocket flap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
19.	Sew on buttons. (cont'd)					
	a. Sew one 30-line sewing hole button at each mark on the right front through the facing.	101 or 301		21 per button (minimum)	24/4	
				16 per button (minimum)	24/4	24/4
	b. Sew one 30-line sewing hole button at the mark on the pocket.	101 or 301		21 per button (minimum)	24/4	24/4
				16 per button (minimum)		
20.	Bartack bellows and pocket opening.					
	a. The bartacks shall be 3/8 inch to 1/2 inch long.					
	b. Secure the top end of the left bellows to the back with a horizontal bartack approximately 3/4 inch below the shoulder seam and with one end of the bartack adjacent to the folded edge of the bellows.	Bar-tack		28 per bartack (minimum)	A	A
	c. Secure each corner of the pocket opening with a vertical bartack on the line of stitching for the pocket.	Bar-tack		28 per bartack (minimum)	A	A
21.	Set elbow pad to left sleeve.					
	Finished appearance. The left elbow pad shall be properly positioned and carefully set without causing twists, puckers, pleats or other distortions to the left sleeve. The gage of stitching shall be uniform. The elbow pad shall finish 3/4 to 1 inch below armhole seam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
21.	Set elbow pad to left sleeve. (cont'd)					
	a. Position the left elbow pad on the back of the left sleeve with the top edge of the pad not more than 1-1/4 inches below top raw edge of sleeve, and with the shorter edge of the pad not more than 1 inch from the raw back edge of the sleeve.					
	b. Set the elbow pad to the sleeve with a double row of stitches as close as possible to, but not on top of, the double row of stitches along the edges of the pad. The double row of stitches shall be uniformly 1/4-inch gage.	301	LSd-2	6-8	40/3	40/3
22.	Set pulse pad.					
	Finished appearance. The pulse pad shall be properly positioned and carefully set without causing twists, puckers, pleats or other distortions to the left sleeve. The gage of stitching shall be uniform. The pad shall finish 3/4 to 1 inch below armhole seam.					
	a. Position the pulse pad on the front of the left sleeve with the top edge of the pad not more than 1-1/4 inches below the top raw edge of sleeve and with the shorter edge of the pad not more than 1 inch from the raw front edge of sleeve.					
	b. Seam the pulse pad to the sleeve with a double row of stitches as close as possible to, but not on top of, the double row of stitches along the edges of the pad. The double row of stitches shall be uniformly 1/4-inch gage.	301	LSd-2	6-8	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
23.	Set elbow pad to right sleeve.					
	Finished appearance. The right elbow pad shall be properly positioned and carefully set without causing twists, puckers, pleats or other distortions to the right sleeve.					
	a. Position the right elbow pad on the back of the right sleeve in accordance with the marks on the pattern.					
	b. Seam the elbow pad to the sleeve with a double row of stitches as close as possible to, but not on top of, the double row of stitches along the edge of the pad. The double row of stitches shall be 1/4-inch gage.	301	LSd-2	6-8	40/3	40/3
24.	Set sleeves.					
	Finished appearance. The sleeves shall be carefully set without twists, puckers, pleats or other distortions. The gage of stitching shall be uniform.					
	a. Join the sleeves to the coat around the armhole with a double-lapped and double-stitched seam, with the back and the front parts lapped on the sleeves. The double row of stitches shall be 1/4-inch gage with the outer row 1/16 inch from the finished edge.	301 or 401	LSc-2 LSc-2	10-14 10-14	40/3 40/3	40/3 40/3
25.	Set shoulder pad.					
	Finished appearance. The shoulder pad shall be properly positioned and carefully set to					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
25.	Set shoulder pad. (cont'd)					
	coat without causing twists, puckers, pleats or other distortions in the sleeve or front. The gage of stitching shall be uniform.					
	a. The double rows of stitches shall be uniformly 1/4-inch gage.					
	b. Position the shoulder pad on the right front and sleeve with the armhole slit corresponding with the armhole seam, and the top edge of the pad extending approximately 3/4 inch to the back of the shoulder seam.					
	c. Stitch the pad to the coat with a double row of stitches as close as possible to, but not on top of, the double row of stitches along the edges of the pad.	301	LSd-2	6-8	40/3	40/3
	d. Secure the pad to the coat at the top end of the armhole slit with backstitching.	301	SSa-1	6-8	40/3	40/3
26.	Close sides and sleeves.					
	Finished appearance. The sides and sleeves shall be carefully closed without twists, puckers, pleats or raw edges. The seams shall start and finish evenly. The gage of stitching shall be uniform.					
	a. The sleeves and sides of the coat shall be closed with a double-lapped and double-stitched seam 1/4-inch gage, with the outer row 1/16 inch from the finished edge.	301	LSc-2	6-8	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
26.	Close sides and sleeves. (cont'd)					
	b. Join the fronts and back at the sides, catching the ends of the belt in the seam; continue to stitch, closing the sleeves at the underarm, with the armhole seam staggered not more than 3/4 inch. The seam of the back and the back part of sleeve shall overlap the fronts, and the front part of sleeve.	301	LSc-2	10-14	40/3	40/3
		or 401	LSc-2	10-14	40/3	40/3
27.	Hem coat and sleeves.					
	Finished appearance. The hem for bottom edge of fronts and back and for the ends of the sleeves shall be uniformly stitched and shall be uniform in width.					
	a. The hem shall finish uniformly 3/4 ±1/8 inch wide.					
	b. Hem the bottom edge of fronts and back with the raw edge turned under and caught in the stitching 1/16 to 1/8 inch from upper folded edge of hem.	301	EFb-1	10-14	40/3	40/3
	c. Hem the lower end of sleeves with the raw edge turned under and caught in the stitching 1/16 to 1/8 inch from the upper folded edge of hem.	301	EFb-1	10-14	40/3	40/3
28.	Identification and size marking.					
	a. When marking is used in lieu of cloth identification or size labels, the identification marking shall be applied to the coat at the location specified for the cloth label					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
28.	Identification and size marking. (cont'd) (see operation 11 b.) or may be applied to the inside of the left front in the area of the breast pocket; the size marking shall be applied on the neck facing at the center back.					
29.	Clean coats. a. Trim and remove all loose ends of thread. Remove all spots, stains and shade markings and tickets.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

*3.7 Finished measurements. The finished coat shall conform to the measurements shown in Table II.

Table II - Coat measurements 1/

Size	Back length 2/	Waist 3/	Sleeve length 4/
	inches	inches	inches
Small	28	19	23
Medium	28-1/2	21	23
Large	29	23	23
Extra Large	29-1/2	25	23

1/ Tolerance on all measurements: ±1/2 inch.
Tolerance is on 1/2 waist measurement.
2/ Back length measurement shall be taken along center back seam from top to bottom edge of coat.
3/ Waist measurement shall be taken along center of belt from folded edge to folded edge of coat with coat buttoned and lying flat. (see letter "A" of Figure 2). Multiply by two.
4/ Sleeve length measurement shall be taken along the center of sleeve from the seam of armhole to lower finished end.

*3.8 Workmanship. The finished coat shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of this certification.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be performed on a completely fabricated coat for conformance to all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

*4.2.2.1 In-process inspection. Inspection shall be performed during the manufacture of the end item to ascertain that the manufacturing requirements of this specification are complied with. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

*4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.1 and 4.2.3.2. The sample unit shall be one coat.

*4.2.3.1 General defects. General defects shall be classified as follows:

		Classification		
		Major	Minor	
Examine	Defect		A	B
Bartacks	Missing, insecure, or misplaced; not serving intended purpose:			
	- one bartack.			X
	- two bartacks.		X	
	- three or more bartacks.	X		
Buttons	a. Not specified size, type or color.	X		
	b. Missing, loose, broken or misplaced:			
	- one button.		X	
	- two or more buttons.	X		
Buttonholes (construction)	a. Wrong type buttonhole.		X	
	b. Buttonhole not securely caught on fabric, causing stitching to pull away from fabric.	X		
	c. Buttonholes not corresponding to size of buttons, so that they do not button properly.	X		
	d. Gimp omitted in one or more buttonholes.			X
	e. Ragged edges, affecting appearance.			X
	f. Constructed with purling on the reverse side.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	g. One or more broken stitches in one or more buttonholes.		X	
	h. Two or more skipped stitches in one or more buttonholes.		X	
	i. Tacking insecure in: - one buttonhole.			X
	- two or more buttonholes.		X	
	j. Not specified type or uncut.		X	
Cleanness	a. Indelible ink shade stamping exposed on outside or spots and stains of permanent nature, seriously affecting appearance.	X		
	b. Removable spot or stain, clearly noticeable.		X	
	c. Thread ends not trimmed, or one or more shade tickets not removed.			X
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein).	X		
Cutting	a. Any component part not cut in accordance with directional lines on patterns or specified requirements.	X		
	b. Any outside basic cloth part not cut with dull side (filling side) as the face of the cloth.	X		
Labels	a. Identification label.			
	1. Missing, incorrect or illegible.	X		
	2. Not stitched on four sides or not on right facing midway between the front and back folded edges approximately 6-1/2 inches above unfinished edge of facing.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	b. Size label.			
	1. Missing, incorrect or illegible.			X
	2. Insecurely stitched at back of neck band.		X	
Material defects and workmanship damages	a. Any weakening fabric defect such as hole, smash, multiple float, loose slub, etc., that may develop into a hole.	X		
	b. Shade bars, unsightly slubs or other similar nonweakening fabric defects, seriously affecting appearance:			
	- on outside of garment.	X		
	- on inside of garment.		X	
	c. Cut, tear, mend, burn or needle-chew and abrasion that may develop into a hole and any exposed drill holes, seriously affecting appearance.	X		
	d. Ruptured fibers in the line of sewing (usually caused by broken, blunt or hooked needles), affecting appearance or service-ability.		X	

NOTE: Material defects and workmanship damages are to be classified as indicated above when the condition definitely weakens the fabric. If the defect does not weaken the fabric but is conspicuous when the garment is worn, classify it as indicated. Material defects or workmanship damages which are inconspicuous and definitely do not weaken the fabric are not to be classified as defects.

Seams and stitching	a. Accuracy of seaming.			
	1. Seam twisted, puckered or pleated, seriously affecting appearance.	X		
	2. Part of garment caught in any unrelated operation or stitching, seriously affecting appearance.	X		
	3. Thread(s) used on outside not same shade or not satisfactorily matching shade of garment.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	4. Thread breaks not secured by stitching back of the break or ends of seam(s) or stitching not caught in other seams or stitching not securely backtacked.			X
	b. Gage of stitching (edge or top stitching).			
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged, seriously affecting appearance.		X	
	2. Not within range of gage specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seam. A break in a line of stitching or continuous skipped or run-off stitches (except on edge or top stitching) constitute an open seam.			
	1. Over 1/8 inch, to and including 1/4 inch.			X
	2. Over 1/4 inch, but not over 3/4 inch.		X	
	3. Over 3/4 inch.	X		
	d. Stitches skipped or broken (on edge or top stitching when seam is seamed, turned and stitched).			
	1. Over 1/4 inch, to and including 1/2 inch.			X
	2. Over 1/2 inch, but not over 1 inch.		X	
	3. Over 1 inch.	X		
	e. Raw edges. A raw edge is classified as such when it occurs along an edge required to be turned under, but the edge is securely caught in the stitching. If the edge is not securely caught in the stitching, score as an open seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	1. On outside:			
	- over 1/8 inch, to and including 1/4 inch.			X
	- over 1/4 inch, but not more than 1 inch.		X	
	- more than 1 inch.	X		
	2. On inside:			
	- over 1/2 inch, to and including 1 inch.			X
	- over 1 inch.		X	
	f. Run-offs.			
	1. On joining seams, when resulting in an open seam, score as "open seam".			
	2. On edge, top or raised stitching, when not resulting in an open seam (outside only):			
	- over 1/2 inch, to and including 1 inch.			X
	- over 1 inch.		X	
	g. Stitch or seam type not as specified.		X	
	h. Stitch tension. (Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching).			
	1. Loose tension, resulting in a loose seam.	X		
	2. Loose tension on edge or top stitching, recognized by loosely exposed loops of top or lower thread.			X
	3. Tight tension (stitches break when normal strain is applied to seam or stitching) (score in accordance with "open seam" classification).			

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	i. Stitches per inch (to be scored only when the condition exists on major portion of seam or stitching).			
	1. Less then minimum number permitted by minus tolerances by:			
	- one stitch.			X
	- two or three stitches.		X	
	- more than three stitches.	X		
	2. One or more stitches in excess of maximum number permitted by plus tolerance.			X
Shaded parts	Outside parts shaded (visible when garment is worn), seriously affecting appearance.	X		

*4.2.3.2 Detailed defects applicable to specific parts on outside of coat. Detailed defects applicable to specific parts on outside of coat shall be classified as follows:

Examine	Defect	Classification Major	Minor A	Minor B
Fronts	a. Buttons out of alignment with buttonholes, causing a noticeable bulge when coat is buttoned, affecting appearance.		X	
	b. Fronts twisted, puckered or bulging between front or neck edge and back edge of facings caused by tight or twisted front or neck facings, seriously affecting appearance.	X		
	c. Edge irregular, affecting appearance.			X
	d. Fronts uneven at top or bottom when buttoned by:			
	- more than 1/4 inch, but not more than 1/2 inch		X	
	- more than 1/2 inch.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Front buttonholes	a. Edge of eyelet from front edge:			
	- less than 5/8 inch, but not less than 1/2 inch.			X
	- more than 3/4 inch, but not more than 1 inch.			X
	- less than 1/2 inch or more than 1 inch.		X	
	b. Top buttonhole from top edge:			
	- less than 1 inch, but not less than 3/4 inch.			X
	- more than 1-1/8 inches, but not more than 1-1/4 inches.			X
	- less than 3/4 inch or more than 1-1/4 inches.		X	
	c. Space between buttonholes:			
	- less than 3-5/8 inches, but not less than 3-1/2 inches.			X
	- more than 3-7/8 inches, but not more than 4 inches.			X
	- less than 3-1/2 inches or more than 4 inches.		X	
Buttons	Center of buttons from front edge:			
	- less than 3/4 inch, but not less than 5/8 inch.			X
	- more than 1 inch, but not more than 1-1/8 inches.			X
	- less than 5/8 inch or more than 1-1/8 inches.		X	
Pocket and flap	a. Pocket or flap poorly shaped or set on crooked, affecting appearance.		X	
	b. Flap lining tight or twisted, causing fullness or twist on outside of flap, affecting appearance.		X	
	c. Top of flap set above top of pocket by:			
	- less than 1/2 inch, but not less than 3/8 inch.			X
	- more than 3/4 inch or less than 3/8 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	d. Flap not covering front or back edges of pocket by more than 1/8 inch.		X	
	e. Poorly shaped or set on crooked, affecting appearance.		X	
	f. Button out of alignment with eyelet in flap buttonhole, causing pocket to pull up or flap to twist or bulge when buttoned, affecting appearance.		X	
	g. Eyelet of flap buttonhole less than 1/2 inch or more than 3/4 inch from point of flap.		X	
	h. Hem at top of pocket not wide enough to reinforce button.	X		
Shoulder pulse and elbow pads	a. Varying from shape of Government patterns by more than 1/4 inch (check only when in doubt).			X
	b. Criss-cross stitching omitted.	X		
	c. Attached with excessive fullness or twist, affecting appearance.		X	
	d. Shoulder pad extending in back of shoulder seam less than 1/2 or more than 1 inch.	X		
	e. Raw ends on slit not turned to underside.		X	
	f. Pulse and left elbow pad positioned more than 1/4 inch from,or on top of, armhole seam.		X	
	g. Right elbow pad not positioned according to pattern marks by 1 inch or more .		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	h. Excessive fullness or twist on one or both pads, seriously affecting appearance.	X		
Sleeves	a. Reversed, i.e., left sleeve in right armhole, right sleeve in left armhole.	X		
	b. Tight at armhole, causing puckers or pleats on front and back, affecting appearance.		X	
	c. Finishing on top of body at armholes.	X		
	d. Ends of armhole seams staggered from center to center by more than 3/4 inch.		X	
	e. Hem less than 5/8 or more than 7/8 inch.			X
Neck facing	Twisted, puckered, or bulging between neck edge and inner edge of facing, caused by tight or twisted neck facing, affecting appearance.		X	
Bellows	a. Folded edge of bellows not edge stitched.		X	
	b. Bartack at top of bellows: - less than 1/2 inch, but not less than 1/4 inch below shoulder seam.			X
	- more than 1 inch, but not more than 1-1/4 inches below shoulder seam.			X
	- less than 1/4 inch or more than 1-1/4 inches below shoulder seam.		X	
	c. Not properly constructed, not permitting edge to lie flat, affecting appearance.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	d. Unequally positioned from both armhole seams or from both side seams by 1/4 inch or more.		X	
Belt	a. Uneven in width by more than 1/4 inch.		X	
	b. Ends of belt not caught in side seams.		X	
	c. Less than 1-7/8 inches or more than 2-1/8 inches wide.		X	
	d. Excessive fullness or twist, affecting appearance.		X	
Bellows	a. Edges of bellows and back not securely caught in binding.		X	
	b. Ends of bellows not caught securely in shoulder or side seams.		X	
Bottom hem	Less than 5/8 inch or more than 7/8 inch.		X	

*4.2.3.3 Finished measurements. Any measurement deviating from the nominal dimensions and tolerance specified in Table II shall be classified as a size measurement defect. Sleeve lengths uneven by 1/2 inch or more shall be classified as a size measurement defect.

*4.2.3.4 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.1 through 4.2.3.2

Inspection Level II of MIL-STD-105

AQL's	Major	4.0 DHU
	Major and Minor A (combined)	15.0 DHU
	Total Major, Minor A and Minor B (combined)	40.0 DHU

4.2.3.3

Inspection Level S-3 of MIL-STD-105

One class	4.0 DHU

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of coats per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

*5.1.1 Level A. Place each garment front up and right side out with front buttonhole facing on top of front button facing. Turn garment over and place right and left sleeves one upon the other, horizontally, across the bellows back. Turn lower half of garment, folding in half. The folded coat shall finish approximately 14 inches in length and 23 inches in width.

5.1.2 Level C. The coats shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Twenty (20) coats of one size only, packaged as specified in 5.1, shall be packed with every other one in a reversed position. The coats shall be packed in a fiberboard shipping container with liner conforming to class weather resistant, size No. 3A of MIL-B-17757. Each container shall have the contents completely covered on top and bottom with a

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

sheet of 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled, closed, and reinforced as specified in the appendix to the box specification. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.1.2 Method 2. When specified (see 6.2) three level B shipping containers, 60 coats of one size only, shall be overpacked in a fiberboard shipping container conforming to class weather resistant, size No. 4 of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Twenty (20) coats of one size only, packaged as specified in 5.1, shall be packed with every other one in a reversed position. The coats shall be packed in a fiberboard shipping container with liner conforming to class domestic, size No. 3A of MIL-B-17757. The fiberboard used in fabricating the box shall be grade 275. The contents of each container shall be completely covered on top and bottom with a sheet of 60-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be assembled and closed as specified in the appendix to the box specification. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Coats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Label. Each shipping container packed with mixed sizes shall have securely attached to the end and side directly under the printing or stenciling, a white label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

*6.1 Intended use. The shooter's coat described herein is intended for wear by male personnel of the U.S. Marine Corps.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of coats in first article (see 3.2).
(e) Levels of packaging and packing required (see 5.1 and 5.2).
(f) When level A, method 2, packing is required (see 5.2.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Samples and shade samples. For information regarding availability of sample coat and of standard shade specified, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective to the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8415-N849

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

M.C.S.A.
826: R.G.F.
18 Jan 74

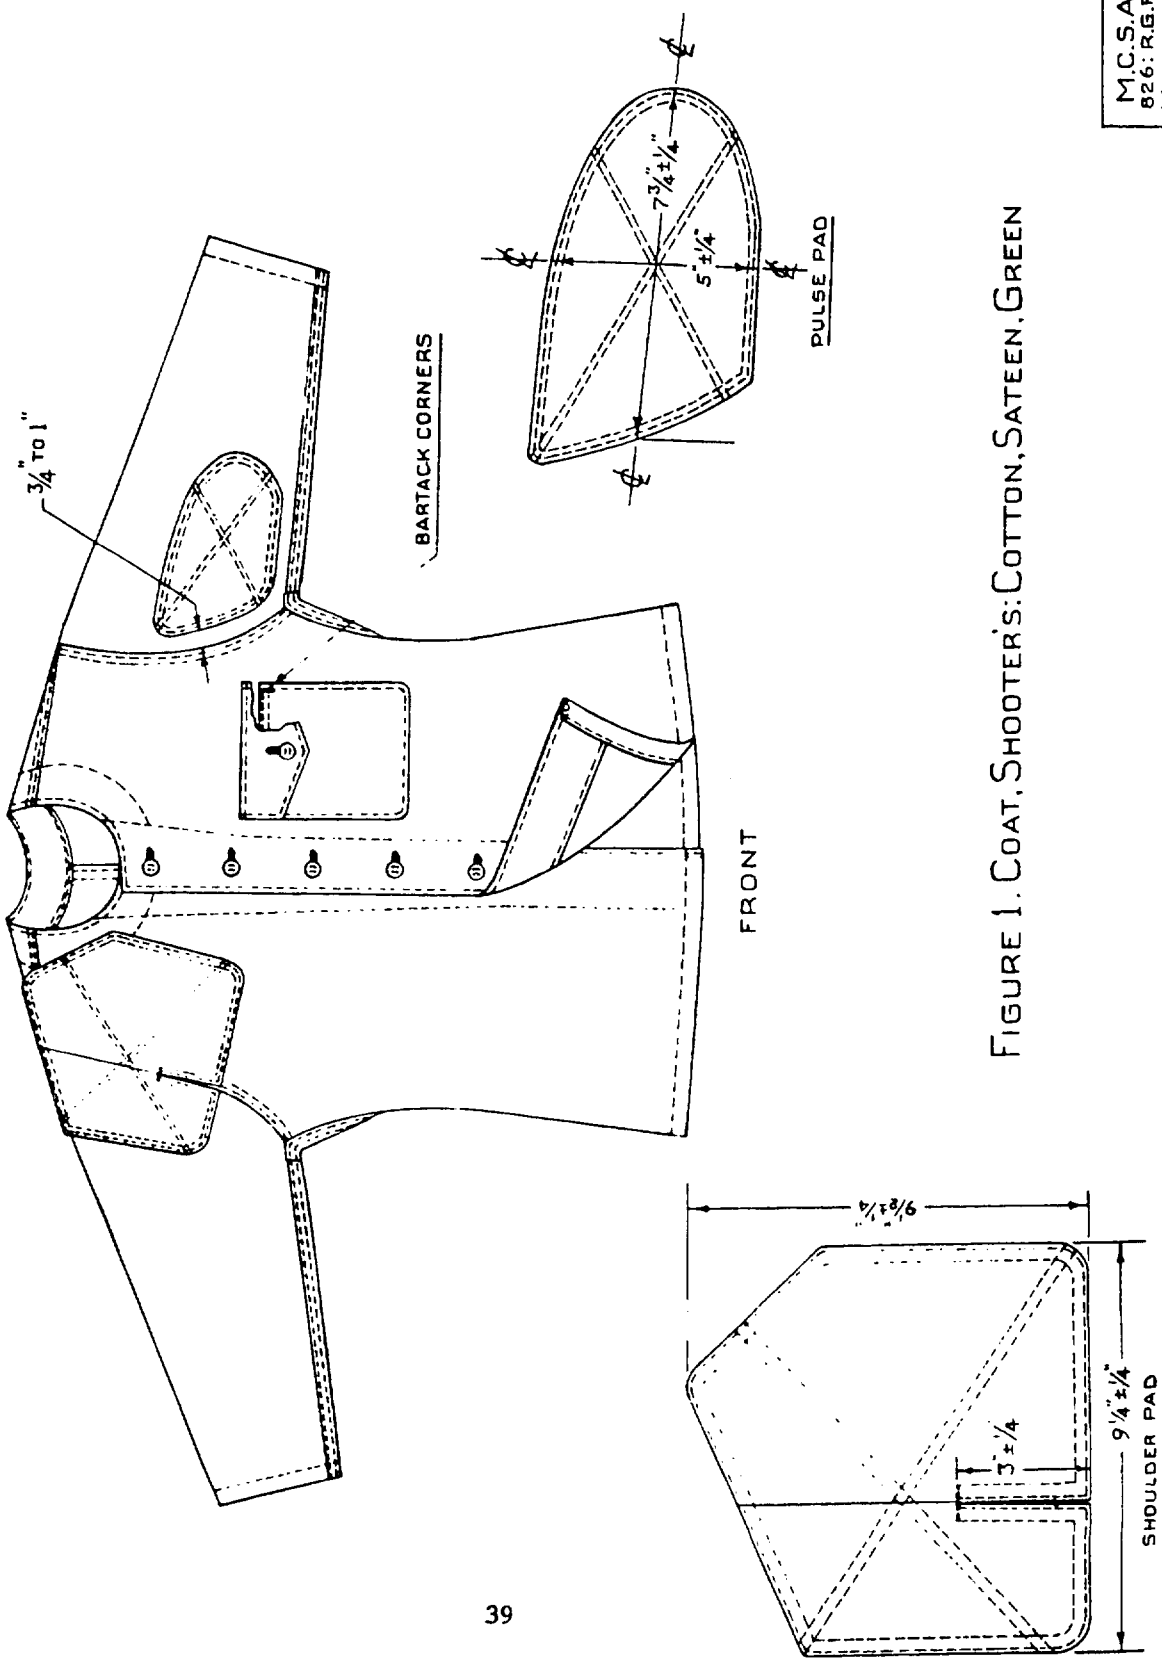


FIGURE 1. COAT, SHOOTER'S: COTTON, SATEEN, GREEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

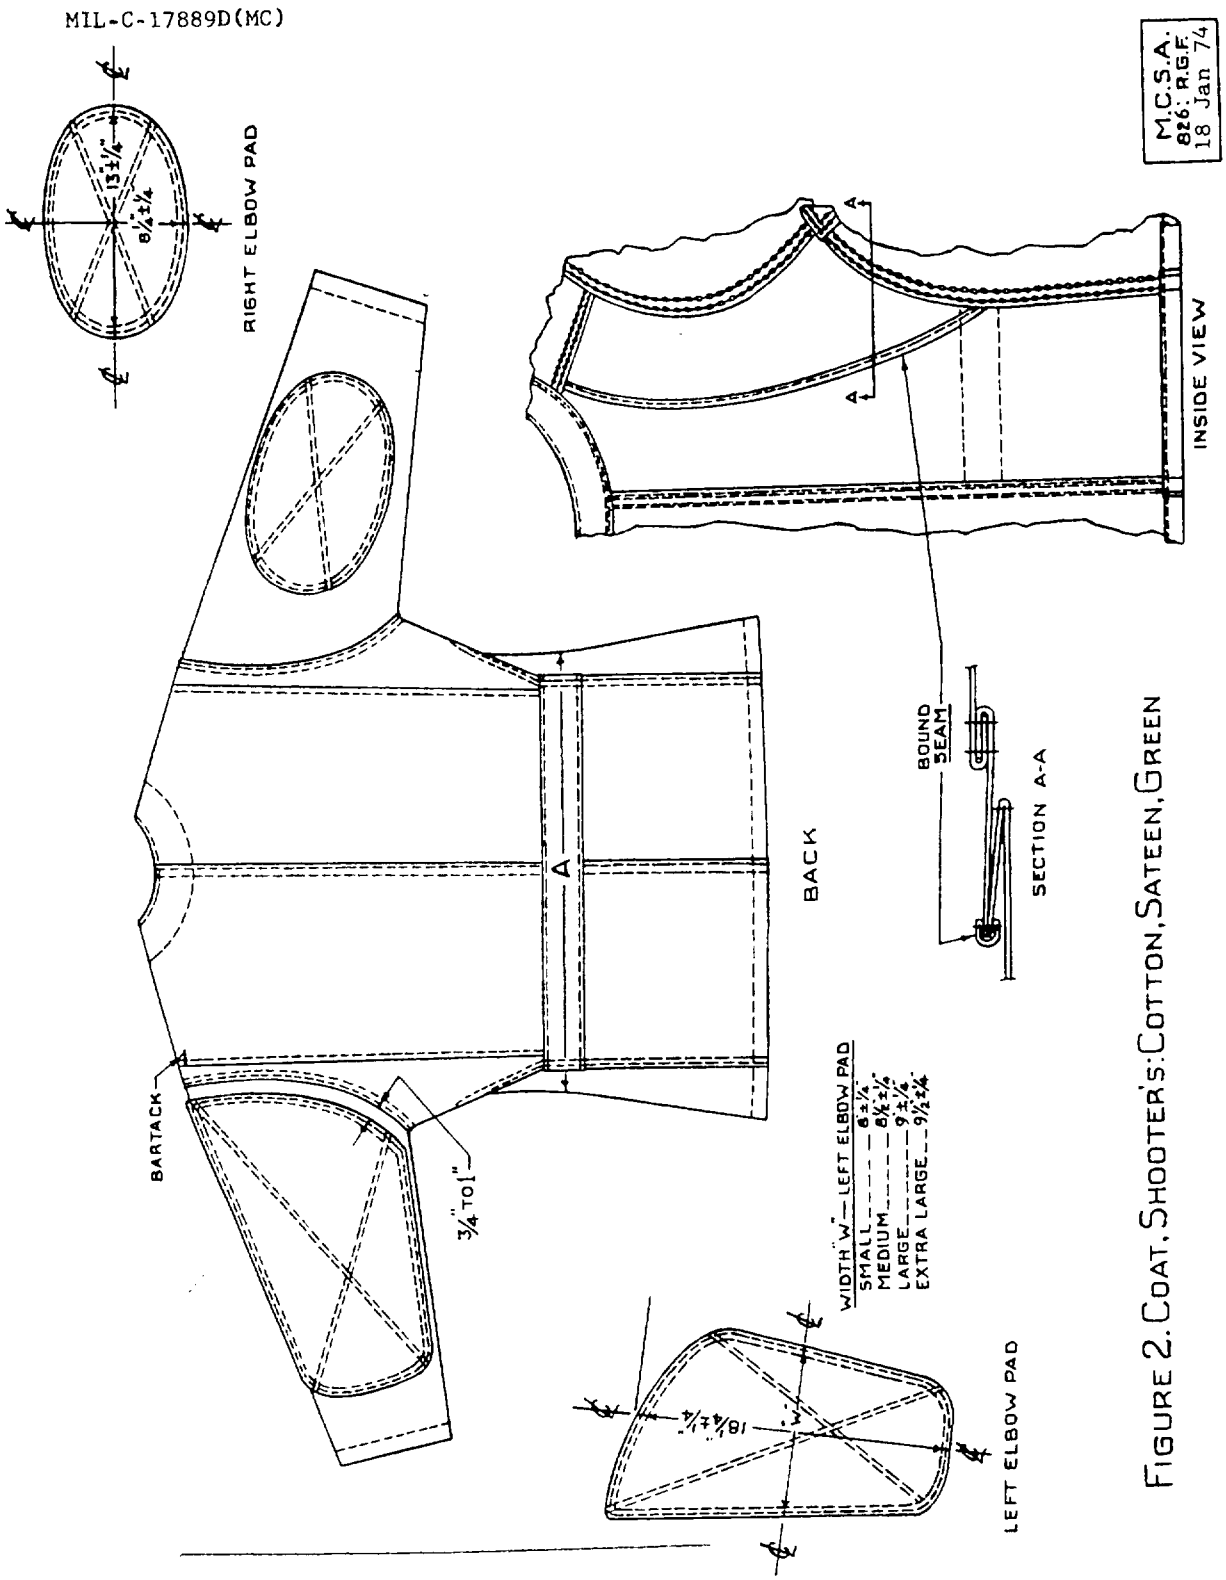


FIGURE 2. COAT, SHOOTER'S: COTTON, SATEEN, GREEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. *If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.*

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DoD-317



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding General (826)
Marine Corps Supply Activity
1100South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:43Z
Check the source to verify that this is the current version before use.