MIL-E-17884B
27 September 1966
SUPERSEDING
MIL-E-17884A
6 May 1955
(See 6.5)

MILITARY SPECIFICATION

EARPHONES (LOW IMPEDANCE),

GENERAL SPECIFICATION FOR

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers low impedance (300 ohms) magnetic diaphragm earphones for use in conjunction with communication equipment (see 3.1).

1.2 Classification. The earphones shall be of the type specified (see 3.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-571	-	Solder, Tin-Alloy, Lead Tin-Alloy, and Lead Alloy.
PPP-B-636	-	Box, Fiberboard.
PPP-T-60	-	Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging.
PPP-T-76	-	Tape, Pressure-Sensitive Adhesive, Paper (for Carton Sealing).

MILITARY

MIL-M-14	-	Molding Plastics and Molded Plastic Parts, Thermosetting.
MIL-P-116	-	Preservation, Methods of.
MIL-W-583	-	Wire, Magnet, Electrical.
MIL-C-45662	-	Calibration System Requirements.
MIL-E-17884/1	-	Earphones (Low Impedance), Type NT-49016A.
MIL-E-17884/2	-	Earphones (Low Impedance), Type NT-49505A.

STANDARDS

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MIL-STD-202	-	Test Methods for Electronic and Electrical Component Parts.
MIL-STD-454	-	Standard General Requirements for Electronic Equipment.

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:42Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ELECTRONIC INDUSTRIES ASSOCIATION (EIA)

Standard SE-105 - Microphones for Sound Equipment.

(Application for copies should be addressed to the Electronic Industries Association, 2001 Eye Street, N.W., Washington, D.C. 20006.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

3. REQUIREMENTS

3.1 Specification sheets.- The individual part requirements shall be as specified herein, and in accordance with the applicable specification sheets (see 6.1). In the event of any conflict between this specification and the specification sheet, the latter will govern.

3.2 Preproduction sample. Earphones furnished under this specification shall be products, samples of which have been tested and have passed the preproduction tests specified in 4.4.

3.3 Material. Material shall be as specified herein. However, when a definite material is not specified, the material shall be of the best quality and enable the earphones to meet the requirements of this specification. All material shall be fungus-inert as specified in requirement 4 of MIL-STD-454, and non-nutrient to insects.

3.3.1 Molded plastic parts. Molded plastic parts shall conform to MIL-M-14. Use of other materials requires the written approval of the procuring activity.

3.3.2 Magnetized materials. Materials used in the magnetic circuit shall be such that the earphone will suffer no seriously objectional degradation in performance, due to loss of magnetization, over long periods of service or storage.

3.3.3 Diaphragm material. The material used for the diaphragm shall be Permendur, or equivalent material, suitably protected against corrosion.

3.4 Design and construction. Earphones shall be designed to provide the maximum of ruggedness under all operating conditions. All parts shall be constructed to provide protection against the effects of corrosion, tropical heat, moist sea atmosphere, humidity, and fungus.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:42Z
Check the source to verify that this is the currentversion before use.

3.4.1 Responsibility for detailed design. The supplier shall accomplish the detailed mechanical and electrical design of the earphone, which shall conform to the requirements of this specification, and the individual specification sheets (see 3.1).

3.4.2 Magnet wire. The magnet wire used in the construction of the coil shall be in accordance with MIL-W-583, class 105, type T, not smaller in diameter than AWG size 41.

3.4.3 Finish.

3.4.3.1 Protective plating or finish. The kind of plating or finish applied to individual metal parts shall depend upon the characteristics of the individual part and its use in the equipment. The plating or finish used shall be such as to provide good appearance, resistance to corrosion and deterioration, and long life. Problems such as soldering, fittings, assembly, and reaction with adjacent parts shall be considered in the selection of the plating or finish. No protective plating or finish need be applied to metals which are inherently corrosion-resistant.

3.4.3.2 Exposed surfaces. Wherever metal parts are exposed to view in service, the plating or finish employed shall be such that the surface will present a dark, low-reflecting appearance.

3.4.4 Weight and dimensions. The weight of the earphone shall be as light as possible to conform to the requirements of this specification. The dimensions and configuration of the earphone shall be as specified (see 3.1).

3.5 Impedance. When earphones are tested as specified in 4.6.2, the impedance at 1,000 Hertz (Hz)1/ shall be between 270 to 330 ohms.

3.6 Frequency response. When earphones are tested as specified in 4.6.3, the frequency response deviation shall be as specified (see 3.1). The output at 1,000 Hz shall be not less than plus 104 nor more than 110 decibels (db) above a reference level of 0.0002 dyne per square centimeter (cm) with a power input to the earphone element of 1 milliwatt. The response below 300 and above 4,000 Hz shall fall off as rapidly as practicable.

3.7 Dielectric withstanding voltage and insulation resistance. When earphones are tested as specified in 4.6.4, there shall be no breakdown of the insulation between the case and terminals or decrease of the insulation resistance below 1 megohm between these points.

3.8 Listening (distortion). When earphones are tested as specified in 4.6.5, the acoustic output shall be free from serious objectionable distortion or rattling over the audio frequency range 200 to 5,000 Hz.

3.9 Moisture resistance. When earphones are tested as specified in 4.6.6, the frequency response shall vary not more than 5 db from the original response immediately following exposure, and not more than 3 db from the original response after drying for 24 hours at room temperature.

1/Wherever used herein, the frequency measurement unit "Hertz (Hz)" is equivalent to and replaces "cycles per second (cps)."

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:42Z
Check the source to verify that this is the current version before use.

3.10 Overvoltage. When earphones are tested as specified in 4.6.7, the degradation of frequency response shall not exceed 3 db from the original response.

3.11 Temperature extremes. When earphones are tested as specified in 4.6.8, the frequency response shall vary not more than 3 db from the original response immediately following exposure to the extreme temperatures.

3.12 Altitude. When earphones are tested as specified in 4.6.9, there shall be no evidence of damage. The frequency response shall vary not more than 4 db from the original response while being tested at the 10,000 feet altitude, and 4 db from the original response after being subjected to the 50,000 feet nonoperating test.

3.13 Temperature cycling. When earphones are tested as specified in 4.6.10, the frequency response shall vary not more than 3 db from the original response.

3.14 Immersion (type NT49505A only). When earphones are tested as specified in 4.6.11, the frequency response shall vary not more than 3 db from the original response. (See MIL-E-17884/2.)

3.15 Impact. When earphones are tested as specified in 4.6.12, there shall be no evidence of structural failure or defect. The degradation in frequency response shall not exceed 3 db from the original response.

3.16 Salt spray (corrosion). When earphones are tested as specified in 4.6.13, the frequency response shall vary not more than 3 db from the original response.

3.17 Marking. Earphones shall be permanently marked in accordance with MIL-STD-130 on the back side in the location specified (see 3.1) with the nomenclature, and the manufacturer's name. Marking shall remain legible after all tests.

3.18 Workmanship. Earphones shall be processed in such a manner as to be uniform in quality and shall be free from defects that will affect life, serviceability, or appearance.

3.18.1 Soldering. All soldering shall be effected in a neat and workmanlike manner, and the surface surrounding the soldered connection shall be free from spatterings. Acid or corrosive fluxes shall not be employed. There shall be no evidence of "cold soldering" and the use of excessive amounts of solder shall not be acceptable. Solder shall be in accordance with composition Sn60 of QQ-S-571.

3.18.2 Foreign materials. The assembled earphone shall be free from foreign bodies such as iron filings.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.

4.1.1 Test equipment and inspection facilities. Test equipment and inspection facilities shall be of sufficient accuracy, quality, and quantity to permit performance of the required inspection. The supplier shall establish calibration of inspection equipment to the satisfaction of the Government. Calibration of the standards which control the accuracy of inspection equipment shall comply with the requirements of MIL-C-45662. The following test equipment shall be used in making impedance and response measurements.

4.1.1.1 Microphone. A Western Electric Company 640AA standard microphone calibrated in accordance with appendix II of EIA standard SE-105, or approved equal.

4.1.1.2 Audio oscillator. The audio oscillator shall have a frequency range of at least 100 to 10,000 Hz and shall have a high degree of stability in both output voltage and frequency and shall have a waveform distortion of less than 2 percent (General Radio Company 913C BFO, or equal).

4.1.1.3 Vacuum tube voltmeter. The vacuum tube voltmeter shall have a flat frequency response (+1 db) from 100 to 10,000 Hz, and shall be capable of measuring voltages from 0.001 volt rms to 10 volts or more (Ballentine Laboratory Incorporated Model 300 vacuum tube voltmeter, or equal).

4.1.1.4 Microphone preamplifier. The preamplifier shall have a flat response (±1 db) over a frequency range of at least 100 to 10,000 Hz, shall have a high degree of stability, and shall have distortion less than 2 percent (Sanborn Company type 43-145, or equal).

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.4).
(b) Quality conformance inspection (see 4.5).
    (1) Inspection of product for delivery (see 4.5.1).
        a. Group A.
        b. Group B.
        c. Group C.
    (2) Inspection of preparation for delivery (see 4.5.2).

4.3 Inspection conditions. Unless otherwise specified herein, all tests shall be conducted under the following ambient conditions considered to be normal room conditions:

(a) Temperature - +20 to +35°C (68° to 95°F).
(b) Pressure - Normal atmospheric.
(c) Humidity - 25 to 90 percent relative.

4.4 Preproduction inspection. Preproduction inspection shall be performed by the supplier, after award of contract and prior to production, at a location acceptable to the Government (see 6.3).

4.4.1 Sample. Twelve earphones shall be submitted for preproduction inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.

4.4.2 Test routine. Sample units shall be subjected to the preproduction inspection specified in table I. All 12 sample units shall be subjected to the inspection of group I. The sample units shall then be divided equally into two groups of six units each, and subjected to the inspection for their particular group.

TABLE I. Preproduction inspection.

Examination and test	Requirement paragraph	Test paragraph
Group I (All units)		
Visual and mechanical	3.1, 3.3, 3.4, 3.17 and 3.18	4.6.1
Impedance	3.5	4.6.2
Frequency response	3.6	4.6.3
Dielectric withstanding voltage and insulation resistance	3.7	4.6.4
Listening (distortion)	3.8	4.6.5
Group II (6 units)		
Moisture resistance	3.9	4.6.6
Group III (6 units)		
Overvoltage	3.10	4.6.7
Temperature extremes	3.11	4.6.8
Altitude	3.12	4.6.9
Temperature cycling	3.13	4.6.10
Immersion (type NT49505A only)	3.14	4.6.11
Impact	3.15	4.6.12
Salt spray (corrosion) 1/	3.16	4.6.13

1/Salt spray shall be performed after impact.

4.5 Quality conformance inspection.

4.5.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A, B, and C.

4.5.1.1 Rejected lots. If an inspection lot is rejected, the supplier may withdraw the lot, rework it to correct the defects, or screen out the defective units, as applicable, and reinspect. Such lots shall be separate from new lots, and shall be clearly identified as reinspected lots. Rejected lots shall be inspected using tightened inspection.

4.5.1.2 Inspection lot. An inspection lot, as far as practicable, shall consist of all earphones of the same type, produced under essentially the same conditions, and offered for inspection at one time.

4.5.1.3 Group A inspection. Group A inspection shall consist of the examinations and tests specified in table II.

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:42Z
Check the source to verify that this is the current version before use.

TABLE II. Group A inspection.

Examination or test	Requirement paragraph	Method paragraph
Visual and mechanical	3.18	4.6.1
Impedance	3.5	4.6.2
Dielectric withstanding voltage and insulation resistance	3.7	4.6.4
Listening (distortion)	3.8	4.6.5

4.5.1.3.1 Sampling for group A inspection. A random sample of earphones shall be selected from each lot in accordance with table III and subjected to the group A inspection specified in table II. The results of each test shall be compared with specification requirements. Failure to conform to this specification for any group A test shall be counted as a defect, and the earphone shall be rejected. If the number of such nonconforming earphones in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

TABLE III. Sampling for group A inspection - AQL (approx.) - 1.5 percent defective.

Number of earphones in inspection lot	Number of earphones in sample	Number of earphones nonconforming on any group A test	
		Acceptance number	Rejection number
501 to 800	75	3	4
801 to 1300	110	5	6
1301 to 3200	150	6	7

4.5.1.4 Group B inspection. Group B inspection shall consist of the tests specified in table IV, in the order shown.

TABLE IV. Group B inspection.

Test	Requirement paragraph	Test paragraph
Frequency response	3.6	4.6.3
Overvoltage	3.10	4.6.7

4.5.1.4.1 Sampling for group B tests. A random sample of earphones shall be selected from each inspection lot in accordance with table V and subjected to the group B tests specified in table IV. The results of each test shall be compared with specification requirements. Failure to conform to this specification for any group B test shall be counted as a defect and the earphone shall be rejected. If the number of such nonconforming earphones in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.

TABLE V. Sampling for group B tests.

Number of earphones in inspection lot	Number of earphones in sample	Number of earphones nonconforming on any group B test	
		Acceptance number	Rejection number
501 to 800	35	3	4
801 to 1300	50	4	5
1301 to 3200	75	6	7

4.5.1.5 Group C inspection. Group C inspection shall consist of the tests specified in table VI.

TABLE VI. Group C inspection.

Test	Requirement paragraph	Test paragraph
Moisture resistance	3.9	4.6.6
Altitude	3.12	4.6.9
Temperature cycling	3.13	4.6.10
Immersion (type NT49505A only)	3.14	4.6.11
Impact	3.15	4.6.12

4.5.1.5.1 Sampling for group C tests. A sample number of earphones shall be selected without regard to quality in accordance with table VII from the end of each month's production and shall be subjected to the group C tests specified in table VI. In the event of failure to conform to this specification for any group C test, the supplier shall correct the cause of failure on future production units and repair the deficiency in any earphones not yet shipped.

TABLE VII. Sampling for group C tests.

Number of earphones in 1 month's production	Number of earphones in sample
501 to 800	3
801 to 1300	5
1301 to 3200	8

4.5.2 Inspection of preparation for delivery. Sample items and packs shall be selected and inspected in accordance with the schedule of acceptance tests and visual inspection aids of MIL-P-116, to verify conformance with the requirements in section 5 of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.

4.6 Methods of examination and test.

4.6.1 Visual and mechanical inspection. Each sample earphone shall be examined externally to determine conformance with the applicable requirements with respect to material, design, construction, weight, dimensions, and workmanship (see 3.1, 3.3, 3.4, 3.17, and 3.18).

4.6.2 Impedance (see 3.5). With the earphone mounted on the 6 cc coupler as shown in figures 1 and 2, 1 volt at 1,000 Hz shall be applied to the earphone terminals. The impedance shall be measured either with an impedance bridge or by measuring the voltage across and the current through the earphone.

4.6.3 Frequency response (see 3.6). The frequency response of the earphone shall be measured using the test equipment coupler shown in figures 1 and 2. In quality conformance testing, a tolerance of 1 db will be permitted beyond the deviation specified (see 3.1), to allow for the recognized daily variation in the test equipment. The earphone shall be subjected to response tests at 100 cycle intervals from 300 to 1,000 Hz and 250 cycle intervals from 1,000 to 4,000 Hz. Sweep or band frequency tests may be employed provided the supplier can demonstrate to the satisfaction of the Government inspector the suitability of such tests. The method of test and the selected frequencies or bands shall be such that they truly indicate the overall response characteristics and the output level of the earphone.

4.6.4 Dielectric withstanding voltage and insulation resistance (see 3.7). Five-hundred volts (rms) 60 cycle (ac) shall be applied between the case and terminals for a period of 5 seconds.


4.6.5 Listening (distortion) (see 3.8). A voltage of 2.5 volts in the frequency range of 200 to 5,000 Hz shall be applied across the earphone and series 300 ohm resistor. The frequency shall then be varied over the 200 to 5,000 Hz audio range.

4.6.6 Moisture resistance (see 3.9).- The earphone shall be tested in accordance with method 106 of MIL-STD-202, except steps 7a and 7b will not be required. Upon removal from the humidity chamber, the frequency response shall be measured as specified in 4.6.3. The excess condensation may be shaken from the unit prior to the final measurement.

4.6.7 Overvoltage (see 3.10). Ten volts at 400 Hz shall be applied directly across the earphone terminals for 10 hours. The frequency response shall then be measured as specified in 4.6.3.

4.6.8 Temperature extremes (see 3.11). The earphones shall be exposed at a temperature of -55°C (-67°F) for not less than 24 hours. After removing the earphone from the cold chamber, the frequency response shall be measured as specified in 4.6.3. The earphone shall then be exposed at a temperature of +65°C (+149°F) for not less than 24 hours. After removing the earphone from the heating chamber, the frequency response shall be measured again as specified in 4.6.3.


Source: https://assist.dla.mil -- Downloaded: 202640-18T10:42Z
Check the source to verify that this is the currentversion before use.

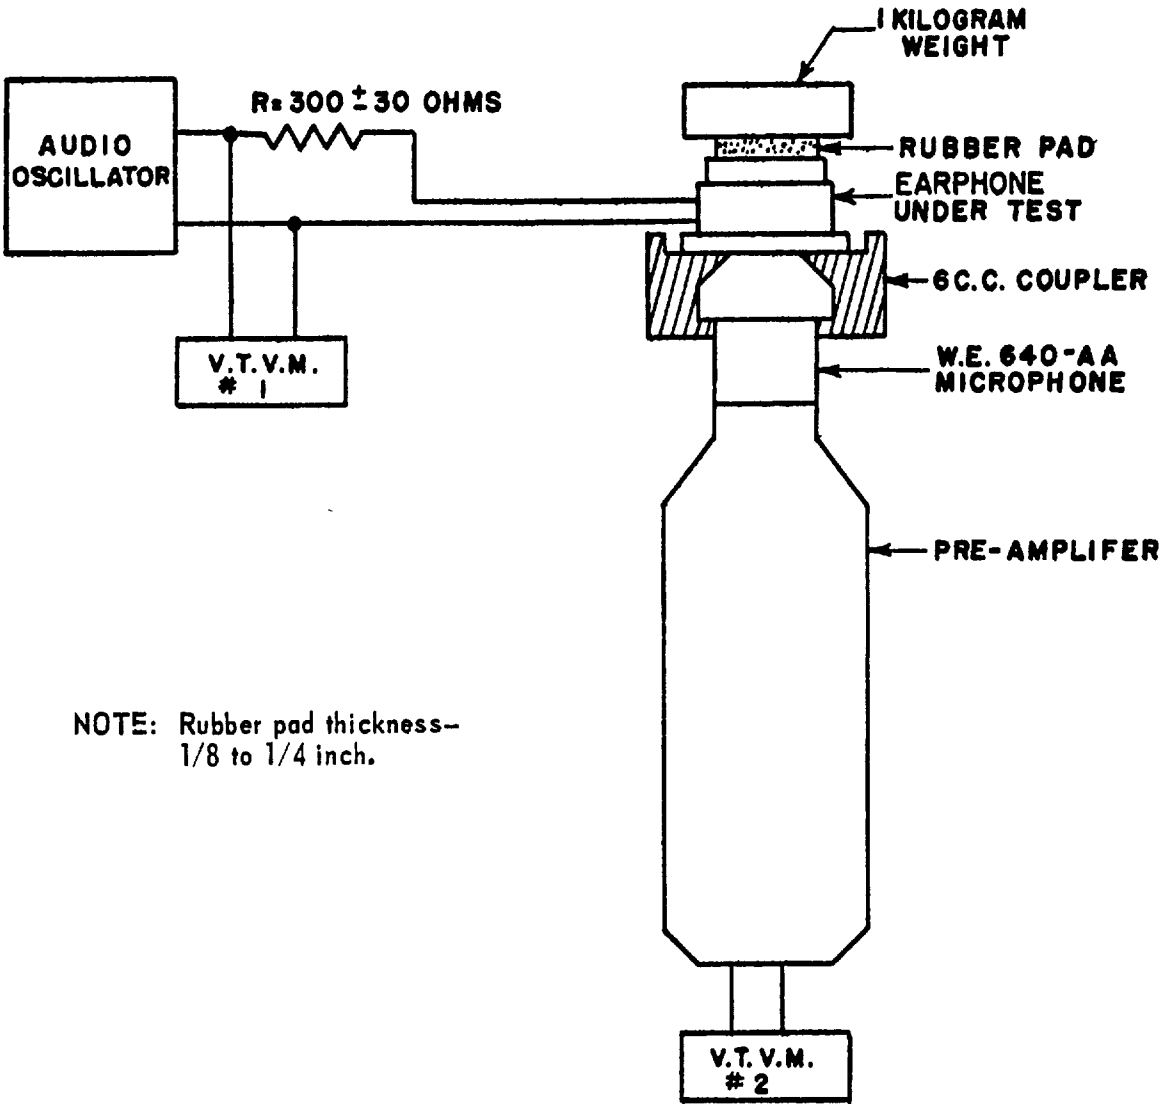

NOTE: Rubber pad thickness–
1/8 to 1/4 inch.

FIGURE 1. Test circuit.

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:42Z
Check the source to verify that this is the current version before use.

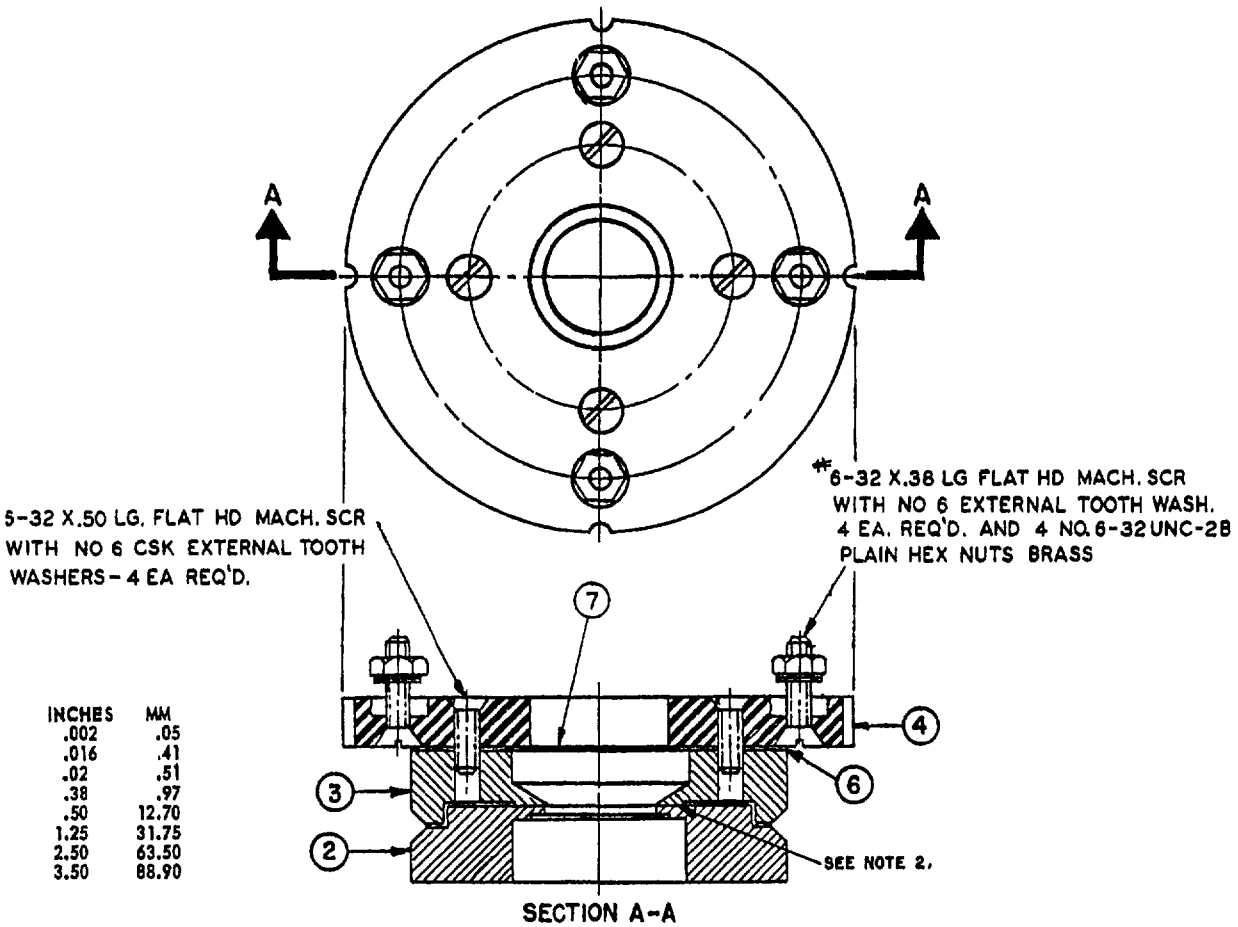



No. reqd.	Part No.	Name	Stock	Material	Spec	Finish
1	7	Grid	.02 x 1.25 dia	Brass	Comm	P-44
1	6	Shim	.02 x 2.50 dia	Brass	Comm	P-44
1	4	Base plate	.38 x 3.50 dia	Phenol fibre	Comm	---
1	3	Coupler plate	.50 x 2.50 dia	Brass	Comm	P-44
1	2	Attach plate	.38 x 2.50 dia	Brass	Comm	P-44

NOTES:
1. This coupler is intended for use with WE microphones types 640A and D96436. Type 640A which has a grid, req. shim (6) for volume compensation. Type D96436 has no grid and req.s use of (7); shim (6) is not used with type D96436.
2. Surfaces marked ⚡ are to be ground and buffed for flat joining. All other surfaces to have smooth machine finish. Break edges .016 radius.
3. Unless otherwise specified, tolerances are .xx±.02, .xxx±.002 and ±1/2° on angles.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.


FIGURE 2. 6cc acoustic coupler.


Source: https://assist.dla.mil -- Downloaded: 202640-18T10:42Z
Check the source to verify that this is the current version before use.

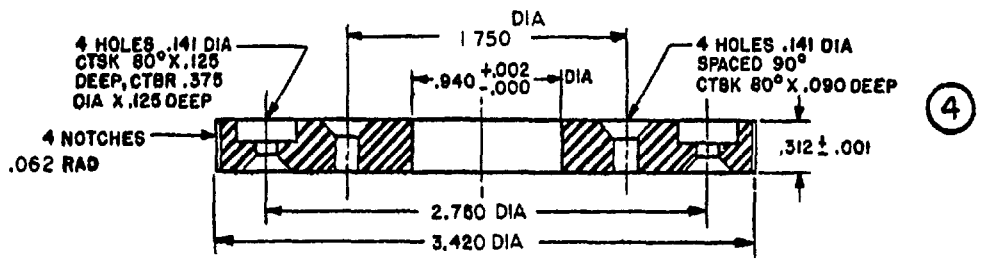

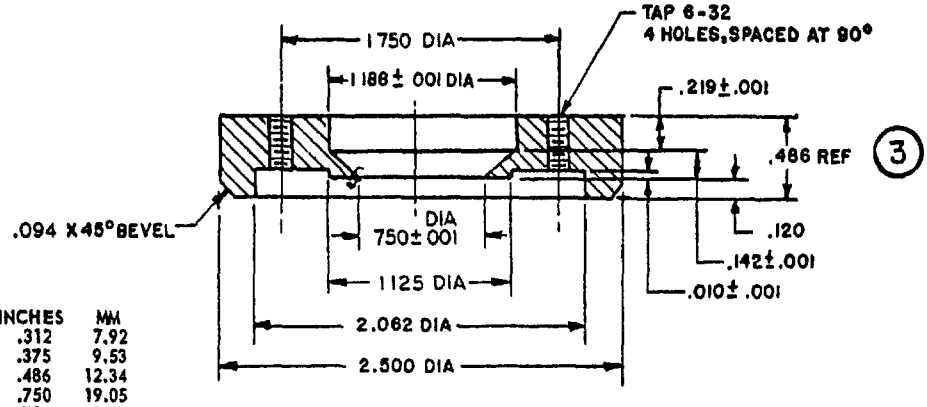

INCHES	MM	INCHES	MM
.001	.03	.312	7.92
.002	.05	.375	9.53
.006	.15	.486	12.34
.010	.25	.750	19.05
.015	.38	.752	19.10
.016	.41	.930	23.62
.062	1.57	.940	23.88
.080	2.03	1.125	28.58
.090	2.29	1.145	29.08
.094	2.39	1.184	30.07
.120	3.05	1.188	30.18
.125	3.18	1.750	44.45
.128	3.25	2.056	52.22
.130	3.30	2.062	52.37
.1405	3.57	2.500	63.50
.141	3.58	2.750	69.85
.142	3.61	3.420	86.87
.219	5.56		

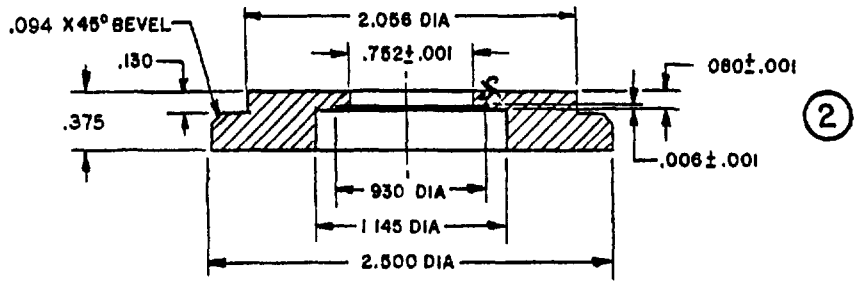

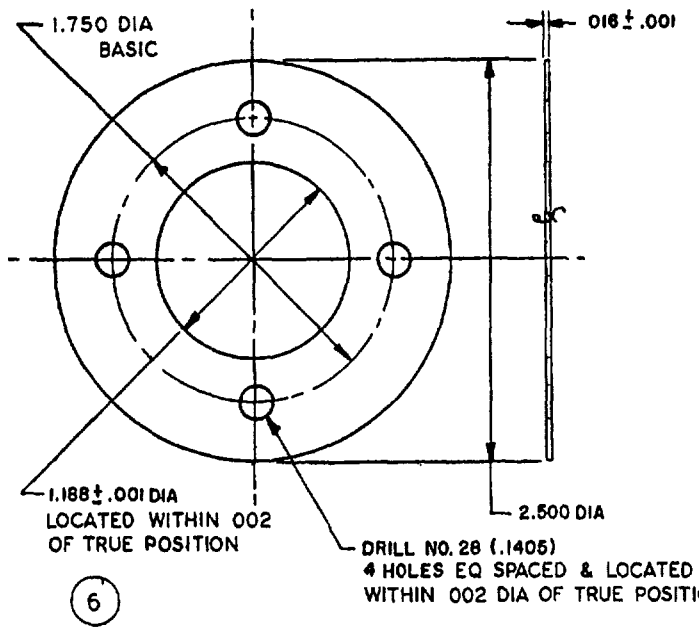

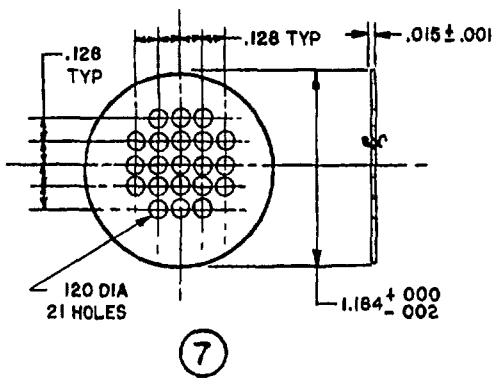


FIGURE 2. 6cc acoustic coupler - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.

4.6.9 Altitude (see 3.12). The earphone shall be subjected to the following altitude test:

(a) 10,000 feet altitude - The earphone shall be placed in an altitude chamber and the pressure reduced at a rate of 5,000 feet per minute to the corresponding altitude of 10,000 feet. The frequency response of the earphone shall then be measured within the chamber as specified in 4.6.3.

(b) 50,000 feet pressure cycling - The earphone shall be subjected to 5 varying pressure cycles. Each pressure cycle shall consist of 30 minutes at 3.4 inches of mercury (approximately 50,000 feet) and 30 minutes at 30 inches of mercury (approximately sea level). The pressure transition shall be approximately 5,000 feet per minute. At the completion of the pressure cycling test, the frequency response of the earphone shall be measured as specified in 4.6.3.

4.6.10 Temperature cycling (see 3.13). The earphones shall be tested in accordance with method 102, test condition B, of MIL-STD-202. The frequency response shall then be measured as specified in 4.6.3.

4.6.11 Immersion (see 3.14). The earphones shall be immersed in tap water, at room temperature, to a covering depth of three feet for a period of 2 hours. The frequency response shall then be measured as specified in 4.6.3. Excess water may be shaken from the unit prior to final measurement.

4.6.12 Impact (see 3.15). The earphone shall be dropped twelve times from a height of 3 feet onto a concrete surface. The frequency response shall then be measured as specified in 4.6.3.

4.6.13 Salt spray (corrosion)(see 3.16). The earphones shall be tested in accordance with method 101, test condition B, of MIL-STD-202. The frequency response shall then be measured as specified in 4.6.3.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning. Earphones shall be cleaned in accordance with MIL-P-116, process C-1.

5.1.1.2 Drying. Earphones shall be dried in accordance with MIL-P-116.

5.1.1.3 Preservative application. None required.

5.1.1.4 Unit packaging. Earphones shall be individually packaged in accordance with MIL-P-116, method III, insuring compliance with the general requirements paragraph under methods of preservation (unit protection), and the physical protection requirement paragraph therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Earphones shall be individually packaged in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from supply source to the first receiving activity. This package may conform to the supplier's commercial practice for retail distribution when it meets the requirements of this level.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. The packaged earphones shall be packed in fiberboard containers conforming to PPP-B-636, class weather resistant, style optional, special requirement. In lieu of the closure and waterproofing requirements in the appendix of PPP-B-636, closures and waterproofing shall be accomplished by sealing all seams, corners, and manufacturer's joint with waterproof tape, 2-inch minimum width, conforming to PPP-T-60, class 1, or PPP-T-76. Banding (reinforcement requirements) shall be applied in accordance with the appendix to PPP-B-636, using nonmetallic or tape banding only.

5.2.2 Level B. Unless otherwise specified, the packaged earphones shall be packed in fiberboard containers conforming to PPP-B-636, class domestic, style optional, special requirement. Closures shall be in accordance with the appendix thereto.

5.2.3 Level C. The packaged earphones shall be packed in shipping containers in a manner that will afford adequate protection against damage during direct shipment from the supply source to the first receiving activity. This pack shall conform to the applicable carrier rules and regulations and may be the supplier's commercial practice when it conforms to the requirements of this level.

5.3 Marking (see 6.2). In addition to any special marking required by the contract or order, each unit package, and exterior container shall be marked in accordance with MIL-STD-129.

5.4 General. Exterior containers shall be of a minimum tare and cube consistent with the protection required and shall contain equal quantities of identical items to the greatest extent possible.

5.5 Inspection. Inspection of military packaging shall be in accordance with MIL-P-116 (see 4.5.2).

6. NOTES

6.1 Intended use. These earphones are used on headsets and headset-microphones covered by MIL-H-3679.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Title, number, and date of the applicable specification sheet, and type required (see 3.1).
(c) Levels of preservation, packaging, packing, and applicable marking (see section 5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.

6.2.1 Indirect shipments. The preservation, packaging, packing, and marking specified in section 5 apply only to direct purchases by or direct shipments to the Government and are not intended to apply to contracts or orders between the supplier and prime contractor.

6.3 Preproduction inspection. Unless otherwise specified by the procuring activity, preproduction approval is valid only on the contract on which it is granted. The activity responsible for preproduction approval is the procuring activity and information pertaining to preproduction inspection may be obtained from that activity.

6.4 Engineering information. Additional information regarding coupler calibration of earphones can be obtained from the American Standards Association publication ASA Z24.9 - 1949. Application for copies should be addressed to the American Standards Association Incorporated, 10 East 40th Street, New York, New York 10016.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - EL
Navy - SH
Air Force - 11

Preparing activity:
Navy - SH

(Project 5965-0090)

Review activities:
Army - None
Navy - None
Air Force - 11, 17, 85

User activities:
Army - None
Navy - None
Air Force - 14, 19

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:42Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD, FORM 1 APR 64 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE D14000

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL SHIP ENGINEERING CENTER
WASHINGTON, D. C 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER, NAVAL SHIP ENGINEERING CENTER
DOCUMENTS AND DOD PROGRAM
ENGINEERING METHODS AND STANDARDS DIVISION
DEPARTMENT OF THE NAVY
WASHINGTON, D C 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.