MILITARY SPECIFICATION SHEET

EARPHONES (LOW IMPEDANCE),

TYPE NT-49016A

The complete requirements for procuring the earphones described herein shall consist of this document and the latest issue of Specification MIL-E-17884.

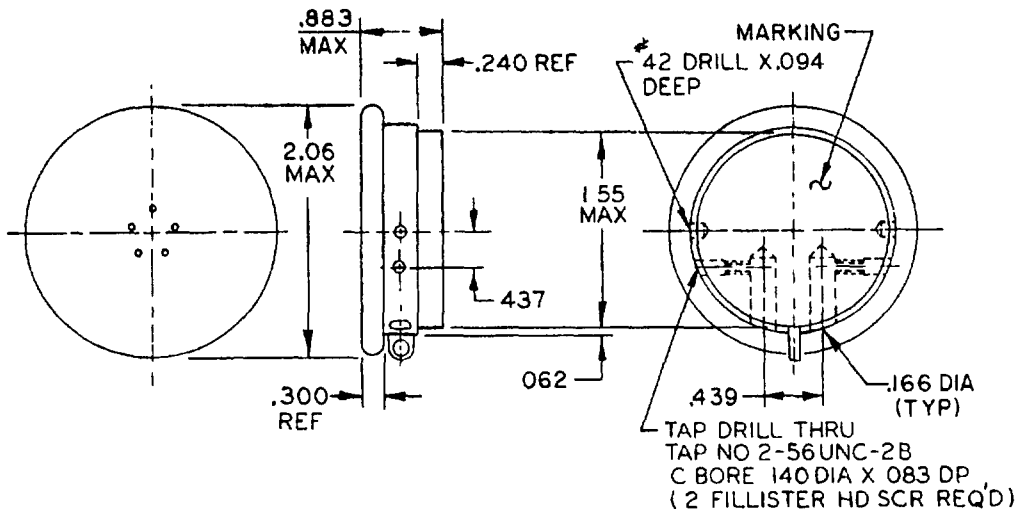

NOTES.
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010.
4. The supplier may furnish a cap with a single large hole or several small holes.

INCHES	MM	INCHES	MM
.010	.25	.300	7.62
.062	1.57	.437	11.10
.083	2.11	.439	11.15
.094	2.39	.883	22.43
.140	3.56	1.55	39.37
.166	4.22	2.06	52.32
.240	6.10		

REQUIREMENTS:

Dimensions and configuration: See figure.

TABLE I. Frequency response

Frequency range (Hz)	Deviation (from 1,000 Hz value in decibels)	
	Plus	Minus
300 to 1600	3	4
1600 to 3200	4	5
3200 to 4000	5	8

Custodians:
Army - EL
Navy - SH
Air Force - 11

Preparing activity.
Navy - SH

(Project 5965-0090-1)

Review activities:
Army - None
Navy - None
Air Force - 11, 17, 85

User activities:
Army - None
Navy - None
Air Force - 14, 19

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.