MILITARY SPECIFICATION SHEET

EARPHONES (LOW IMPEDANCE),

TYPE NT-49505A[1/]

The complete requirements for procuring the earphones described herein shall consist of this document and the latest issue of Specification MIL-E-17884.

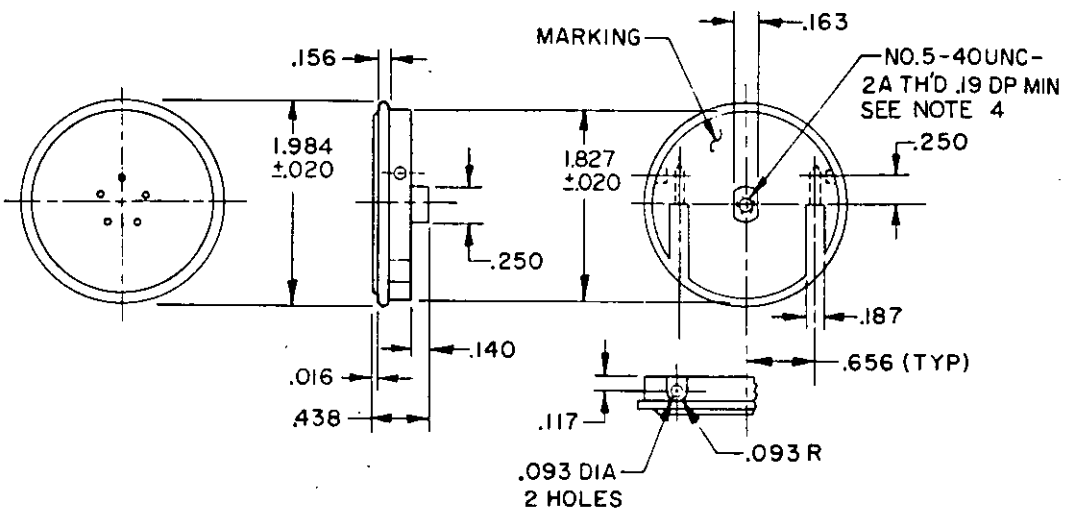

INCHES	MM	INCHES	MM
.010	.25	.163	4.14
.016	.41	.187	4.75
.020	.51	.250	6.35
.093	2.36	.438	11.13
.117	2.97	.656	16.66
.140	3.56	1.827	46.41
.156	3.96	1.984	50.39

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010.
4. The supplier shall furnish a 5–40UNC–2A binding head screw and an internal tooth lockwasher (Shakeproof 1905–00, or equal) for attaching the earphone to the headband.
5. The supplier may furnish a cap with a single large hole or several small holes.

REQUIREMENTS:

Dimensions and configuration: See figure.

TABLE I. Frequency response.

Frequency range (Hz)	Deviation (from 1000 Hz value in decibels)	
	Plus	Minus
300 to 1600	3	4
1600 to 3200	4	5
3200 to 4000	5	8

1/ NT-49505A is the same as NT-49505 except without breather valve.

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - SH
Air Force - 11

Review activities:
Army - None
Navy - None
Air Force - 11, 17, 85

User activities:
Army - None
Navy - None
Air Force - 14, 19

Preparing activity:
Navy - SH

(Project 5965-0090-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:42Z
Check the source to verify that this is the current version before use.