

MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, RACK ASSEMBLY, TRACK, FEEDTHRU TYPE, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the rack described herein shall consist of this document and the latest issue of specification MIL-T-81714.

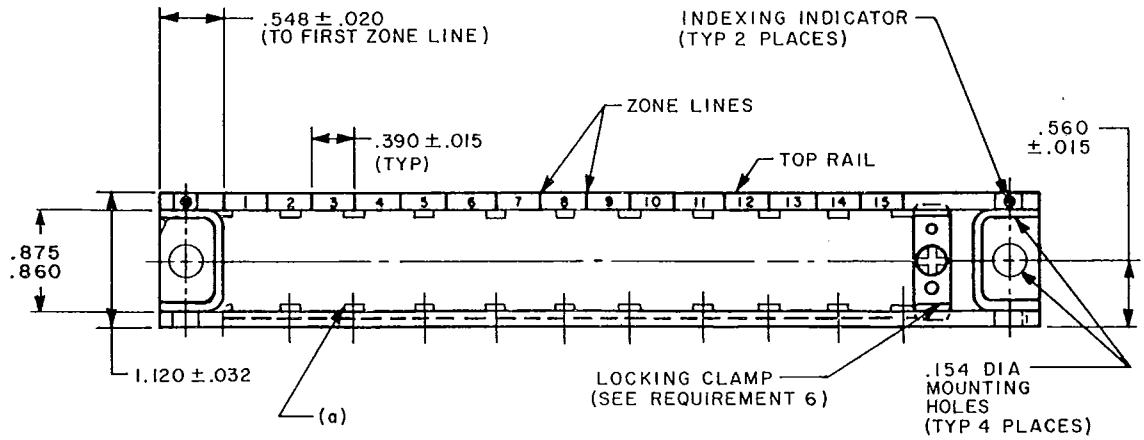

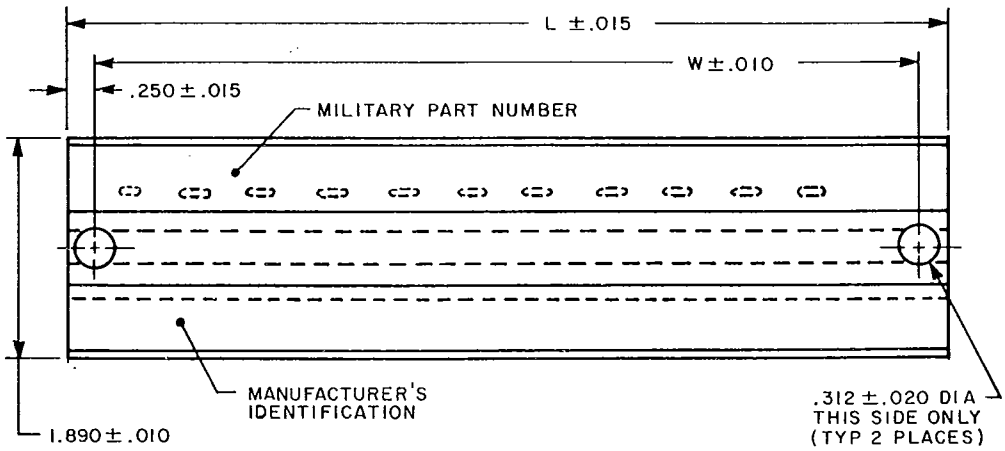



(a) CHANGE IN TAB DESIGN FROM TAPERED TO RECTANGULAR, EFFECTIVE NO LATER THAN 1 YEAR FROM DATE OF REVISION D.

AMSC N/A FSC 5940


DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

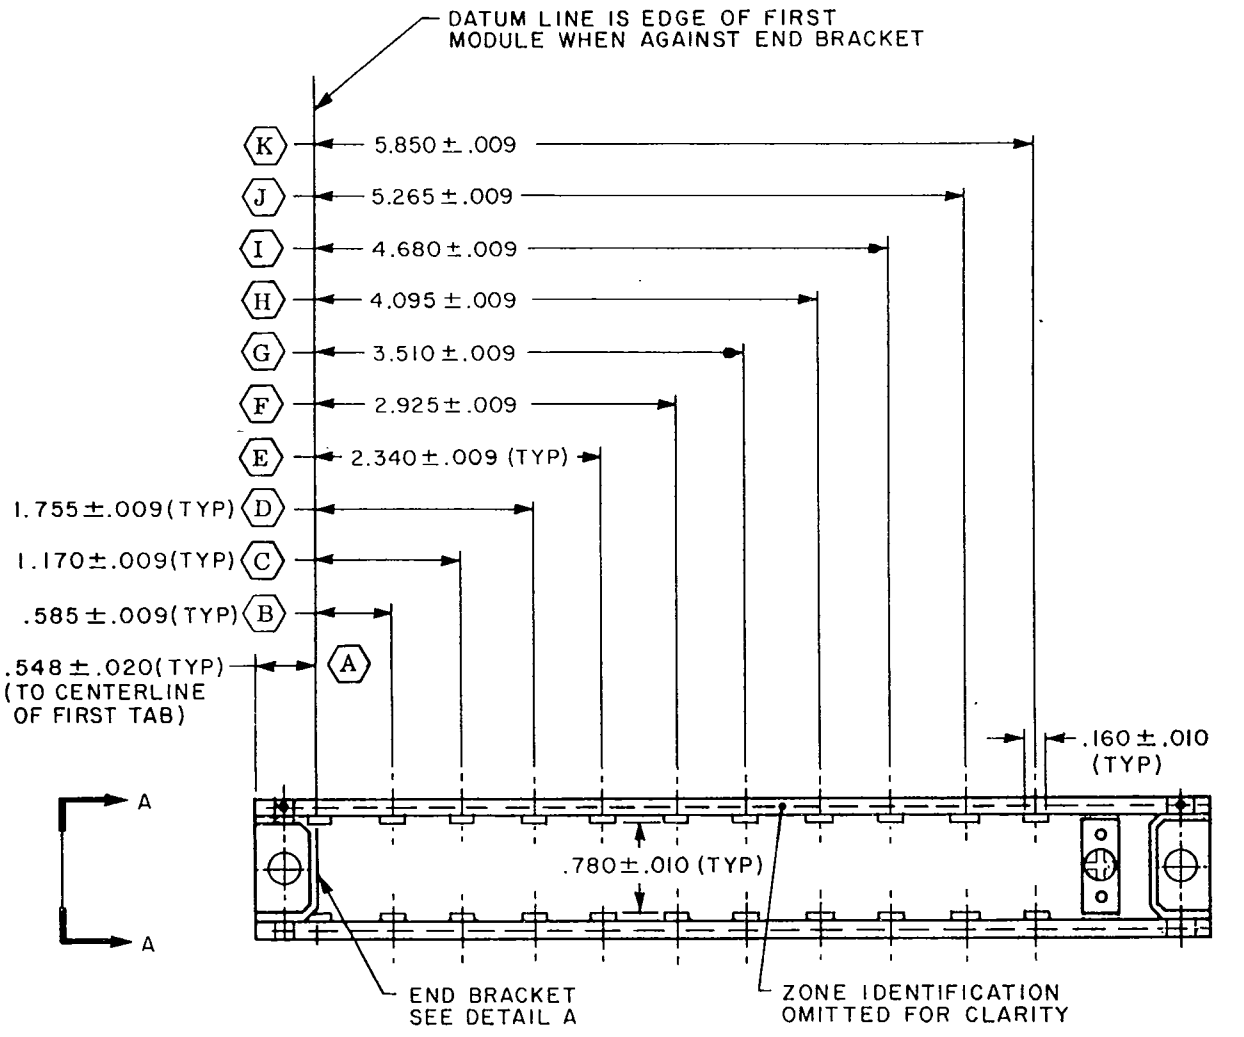

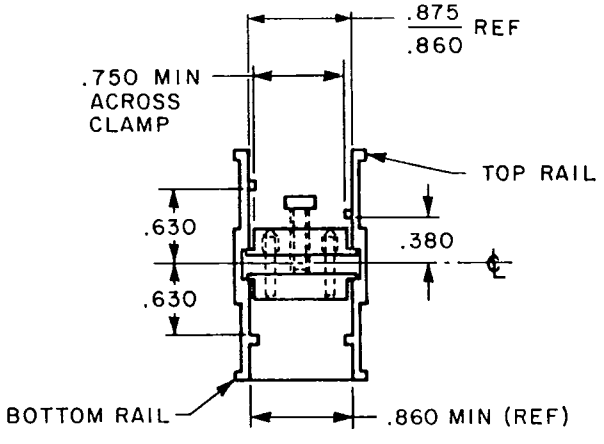


END BRACKET REMOVED
ROTATED 90° CCW

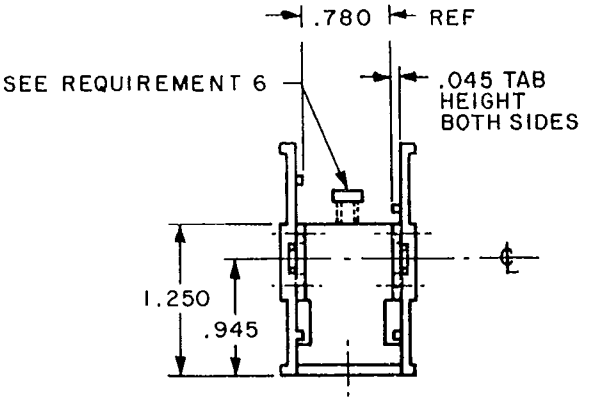

END BRACKET POSITIONED
ROTATED 90°CCW

VIEW A–A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

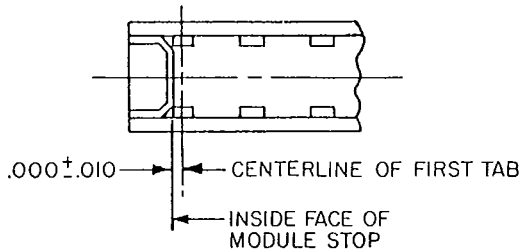

DETAIL A

TABLE I

Dash Number	Number of Blocks 1/	L	W	Tab Location
1	10	5.551	5.051	(A) thru (G)
2	3	2.821	2.321	(A) thru (C)
3	4	3.211	2.711	(A) thru (C)
4	5	3.601	3.101	(A) thru (D)
5	6	3.991	3.491	(A) thru (E)
6	7	4.381	3.881	(A) thru (E)
7	8	4.771	4.271	(A) thru (F)
8	9	5.161	4.661	(A) thru (G)
9	11	5.941	5.441	(A) thru (H)
10	12	6.331	5.831	(A) thru (I)
11	13	6.721	6.221	(A) thru (I)
12	14	7.111	6.611	(A) thru (J)
13	15	7.501	7.001	(A) thru (K)

1/ NOTE: Number of blocks apply to the 22, 20 and 16 sizes. The number of size 12 blocks is the number shown divisible by 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

Inch	mm	Inch	mm	Inch	mm	Inch	mm
.005	0.13	.585	14.86	2.821	71.65	5.051	128.30
.009	0.23	.630	16.00	2.925	74.30	5.161	131.09
.010	0.25	.750	19.05	3.101	78.77	5.265	133.73
.015	0.38	.780	19.81	3.211	81.55	5.441	138.20
.020	0.51	.860	21.84	3.491	88.67	5.551	141.00
.032	0.81	.875	22.23	3.510	89.15	5.831	148.11
.045	1.14	.945	24.00	3.601	91.47	5.850	148.59
.154	3.91	1.120	28.45	3.881	98.58	5.941	150.90
.161	4.09	1.170	29.72	3.991	101.37	6.221	158.01
.250	6.35	1.250	31.75	4.095	104.01	6.331	160.81
.307	7.80	1.755	44.58	4.271	108.48	6.611	167.92
.312	7.92	1.890	48.01	4.381	111.28	6.721	170.71
.380	9.65	2.321	58.95	4.661	118.39	7.001	177.83
.390	9.90	2.340	59.44	4.680	118.87	7.111	180.62
.548	13.92	2.711	68.86	4.771	121.18	7.501	190.53
.560	14.22						

REQUIREMENTS:

1. MATERIALS:

   Rack end bracket and locking clamp; aluminum alloy 6063, temper T5 in accordance with QQ-A-200/9 or stainless steel in accordance with QQ-S-766.

2. FINISH:

   Aluminum parts shall be anodic coated in accordance with MIL-A-8625, Type II, Class 2, black. Stainless steel parts shall be passivated in accordance with QQ-P-35.

3. The indexing indicator shall be marked on the specified top rail only.

4. The rack shall be designed for installation of MIL-T-81714/6, MIL-T-81714/7, MIL-T-81714/8 and MIL-T-81714/9 blocks.

5. The rack shall be designed so that the zone numbers on the bottom rail are a reverse image of those shown on the specified top rail.

6. Locking clamp shall be designed to be permanently retained in rack. The locking clamp screw shall be cross recessed in accordance with MS9006, 8-32UNC-2A x .500, corrosion- resistant steel, passivated, self-locking or equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

NOTES:

1. Unless otherwise specified, dimensions in inches, tolerances: decimals ±.005.
2. Rack to be free of all burrs and sharp edges .015R max.
3. Zone number and zone lines shall be white.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. International interest, see specification MIL-T-81714.
6. The part consists of the letter M, specification sheet number, and a dash number from Table I. When parts are made from aluminum, add no letter after the dash number. When parts are made from stainless steel, add an S after the dash number.

M 81714/10 - **

- ** — Dash Number.
- 81714/10 — Specification Sheet Number.
- M — Military Part Number Indicator.

Part number example:

M81714/10-1

Feedthru type rack assembly dash number.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Navy - AS
(Project No. 5940-1000-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.