
MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, TERMINAL JUNCTION BLOCKS, SECTIONAL, MODULES, ELECTRONIC, FEEDBACK TYPE, SIZE 16, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the blocks described herein shall consist of this document and the latest issue of Specification MIL-T-81714.

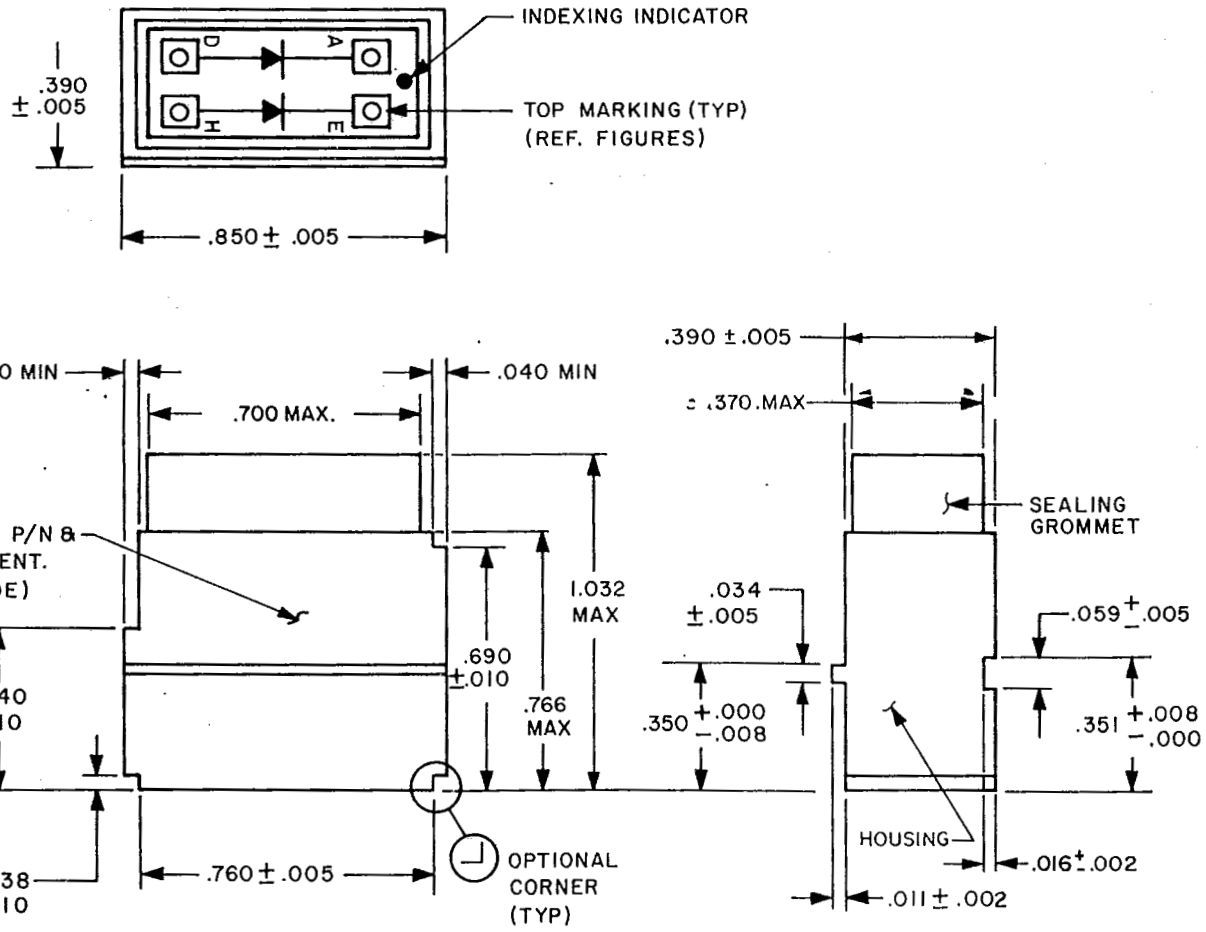


Size 16 Electronic Block


AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.




TOP MARKING

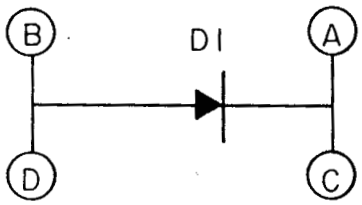


SCHEMATIC DIAGRAM

FIG. 1A




TOP MARKING

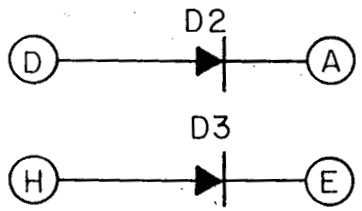


SCHEMATIC DIAGRAM

FIG. 1B



TOP MARKING

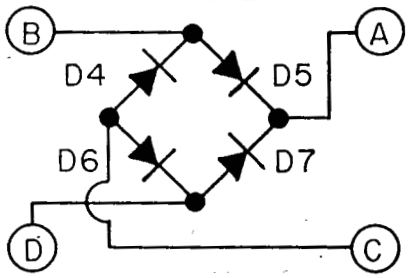

SCHEMATIC DIAGRAM

FIG. 1C


FIGURE 1. Blocks with diode(s).

TABLE I. Dash numbers for Figure 1.


Dash No.	Figure	Ref Des	Part Number	Specification
-001	1A	D1	JAN 1N5618	MIL-S-19500/427
-002	1A	D1	JAN 1N5061	MIL-S-19500/427
-003	1B	D2/D3	JAN 1N5626	MIL-S-19500/432
-004	1C	D4, D5 D6, D7	JAN 1N3611	MIL-S-19500/228
-005	1C	D4, D5 D6, D7	JAN 1N5622	MIL-S-19500/427

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

Inch	mm	Inch	mm	Inch	mm	Inch	mm
.002	0.05	.038	0.97	.370	9.40	.752	19.10
.005	0.13	.040	1.02	.390	9.91	.760	19.30
.010	0.25	.059	1.50	.440	11.18	.766	19.46
.011	0.28	.350	8.89	.690	17.53	.850	21.59
.014	0.36	.351	8.92	.700	17.78	1.032	26.21
.034	0.86	.365	9.27				




TOP MARKING

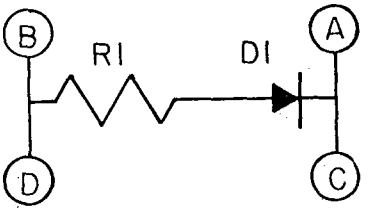


SCHEMATIC DIAGRAM

FIG. 2A



TOP MARKING

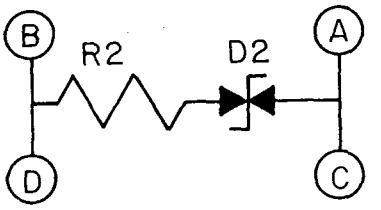

SCHEMATIC DIAGRAM

FIG. 2B

FIGURE 2. Blocks with resistor and diode.

TABLE II. Dash numbers for Figure 2.

Dash No.	Figure	Ref. Des.	Ohms	Part Number	Specification No.
-601	2A	R1	1.0	RWR81S1R00FM	MIL-R-39007/9
		D1		JAN 1N5618	MIL-S-19500/427
		D1		JAN 1N3613	MIL-S-19500/228
-602	2B	R2	1.0	RWR81S1R00FM	MIL-R-39007/9
		D2		JAN-TX-1N6162	MIL-S-19500/516
-603	2B	R2	1.0	RWR81S1R00FM	MIL-R-39007/9
		D2		JAN-TX-1N6173	MIL-S-19500/516

Source: https://assist.dla.mil - Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

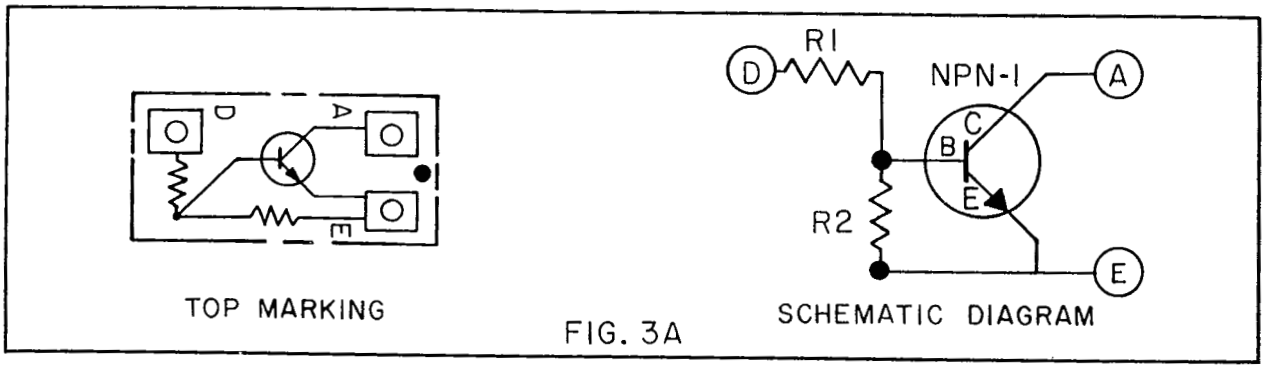


FIG. 3A

TABLE III. Dash numbers for Figure 3.

Dash No.	Figure	Ref. Des.	Ohms	Part Number	Specification No.
-801	3A	R1	150K	RN60C1503F	MIL-R-10509/1
		R2	10K	RN60C1002F	MIL-R-10509/1
		NPN-1		JAN 2N2222A	MIL-S-19500/255

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

NOTES:


1. Dimensions are in inches.

2. This block is designed for installation in the MIL-T-81714/5 rack and MIL-T-81714/16 rack with its indexing indicator adjacent to the indexing rack rail. This block can also be installed in MIL-T-81714/29 brackets.

3. Tool for contact inserting/removal is M81969/14-03 or M81969/8-08 and shall be ordered separately.

4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

5. The part number consists of the letter M, specification sheet number, block class and electronic component/circuit dash number (see Tables).

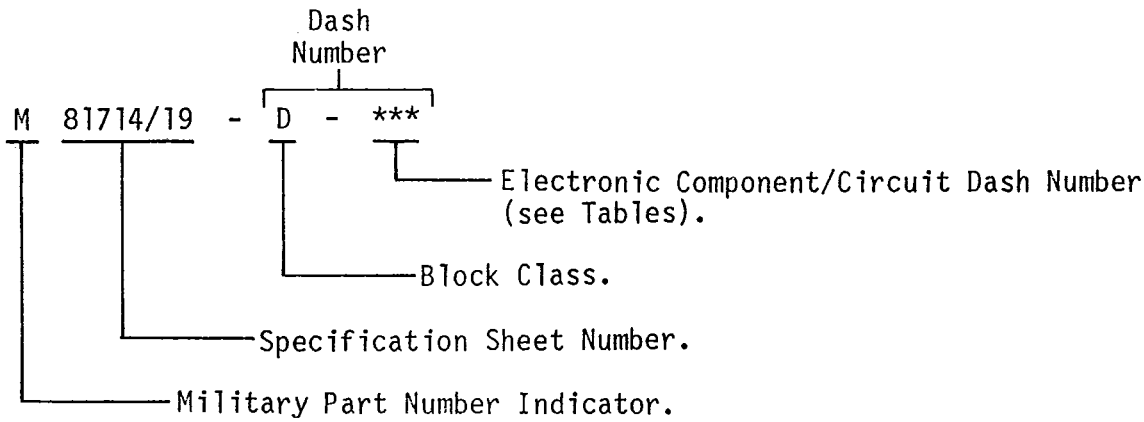

Part Number Example:

M81714/19-D-001

Feedback type electronic block, size 16, Class D, with -001 circuit, one JAN 1N3613 diode or one JAN 1N5618 diode.

6. Classes A, B and C components are inactive for new design. Only Class D components shall be used for direct Government acquisition.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Navy - AS
(Project No. 5940-1000-18)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.