MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, TERMINAL JUNCTION BLOCKS, ELECTRONIC, IN-LINE JUNCTIONS, INTEGRAL DIODE, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the blocks described herein shall consist of this document and the latest issue of Specification MIL-T-81714.

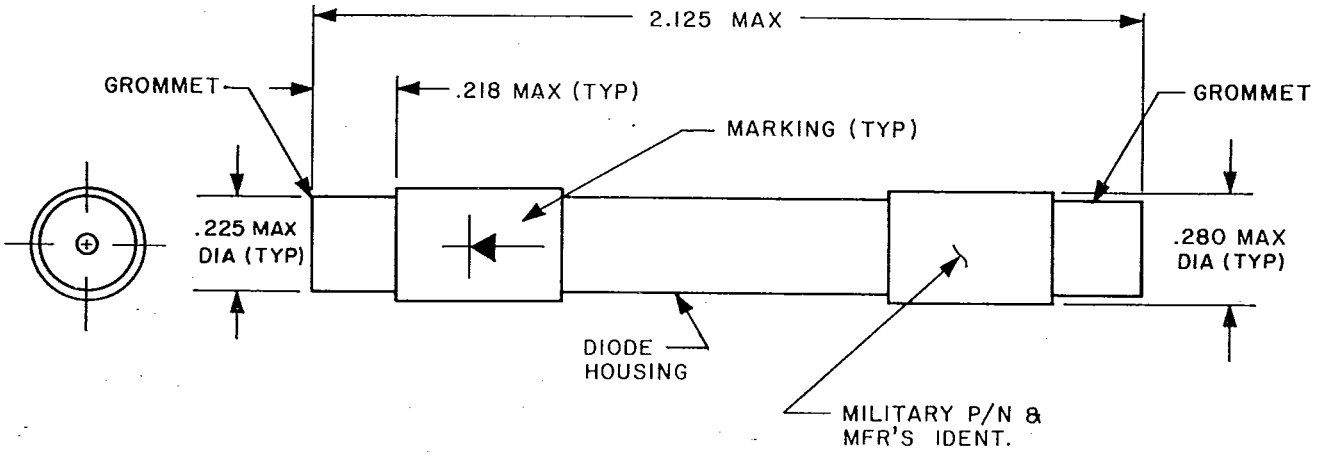


FIGURE 1. Style 1 electronic in-line junction.

TABLE I. Style 1 part numbers.

		Contacts (see Note 3)	
Part Number 1/	Diode P/N	Size	Part Number
M81714/21-1D001	JAN 1N5618	22	M39029/1-100
M81714/21-1D002	JAN 1N5618	20	M39029/1-101
M81714/21-1D003	JAN 1N4148	20	M39029/1-101
M81714/21-1D004	JAN 1N5620	20	M39029/1-101

1/ See part number explanation, Note 5
* Class D

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

Inch	mm	Inch	mm
.218	5.54	.401	10.19
.225	5.72	2.125	53.98
.280	7.11	3.100	78.74

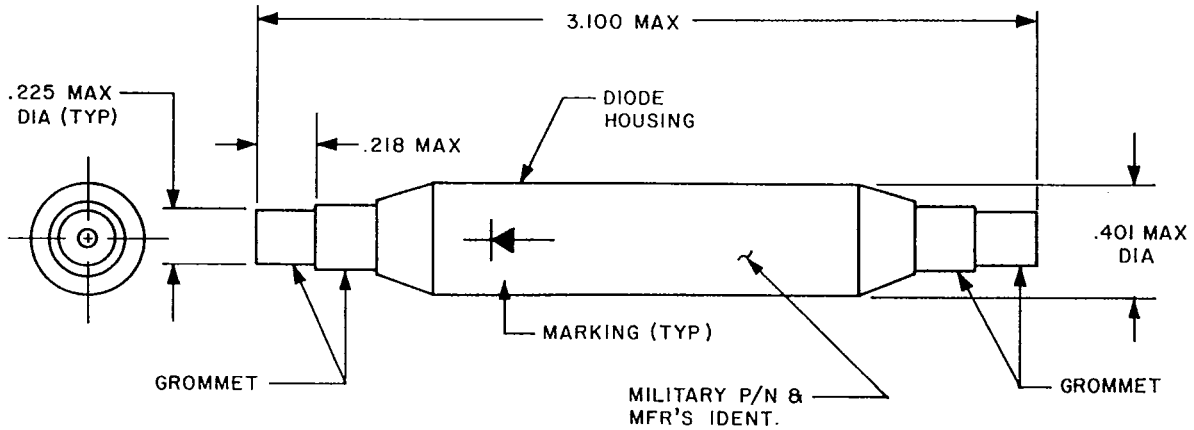


FIGURE 2. Style 2 electronic in-line junction.

TABLE II. Style 2 part numbers.

		Contacts (see Note 3)	
Part Number 1/	Diode P/N	Size	Part Number
M81714/21-2D001	1N5061	20	M39029/1-101
M81714/21-2D002	1N5199	20	M39029/1-101

1/ See part number explanation, Note 5

REQUIREMENTS:

1. Materials:

   a. Current carrying members of the electronic in-line junction shall be in accordance with the component specification.

   b. Housing shall be covered by shrink tubing and/or shrouded with grommet material.

NOTES:

1. Dimensions are in inches.


2. MIL-T-81714 requirements apply to basic in-line junction only. For rating and characteristics of electronic component(s), consult component specification.

3. Tool for contact inserting/removal is M81969/14-02 and shall be ordered separately.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.

4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

5. The part number consists of the letter M, specification sheet number, style number (see Figures), class, and electronic component/circuit dash number (see Tables).

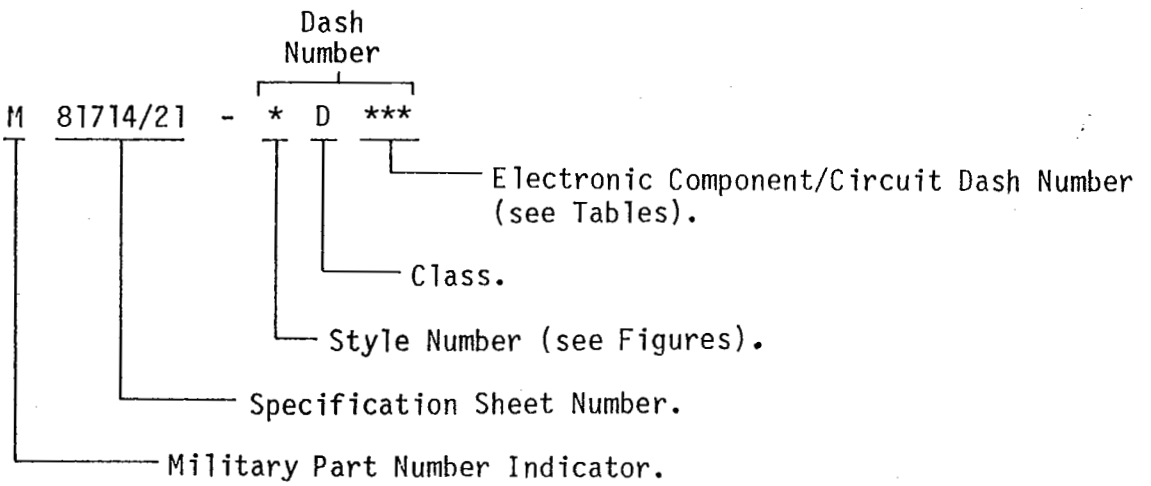

Part Number Example:

M81714/21-1D001

Diode in-line junction, Size 22, Style 1, Class D, with 001 circuit (one JAN 1N5618 diode).

6. Classes A, B and C components are inactive for new design. Only Class D components shall be used for direct Government acquisition.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Navy - AS
(Project No. 5940-1000-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:58Z
Check the source to verify that this is the current version before use.