MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, TERMINAL JUNCTION BLOCKS, SECTIONAL, ELECTRONIC, IN-LINE JUNCTIONS, DOUBLE, INTEGRAL DIODE(S), SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the electronic in-line junction described herein shall consist of this document and the latest issue of specification MIL-T-81714.

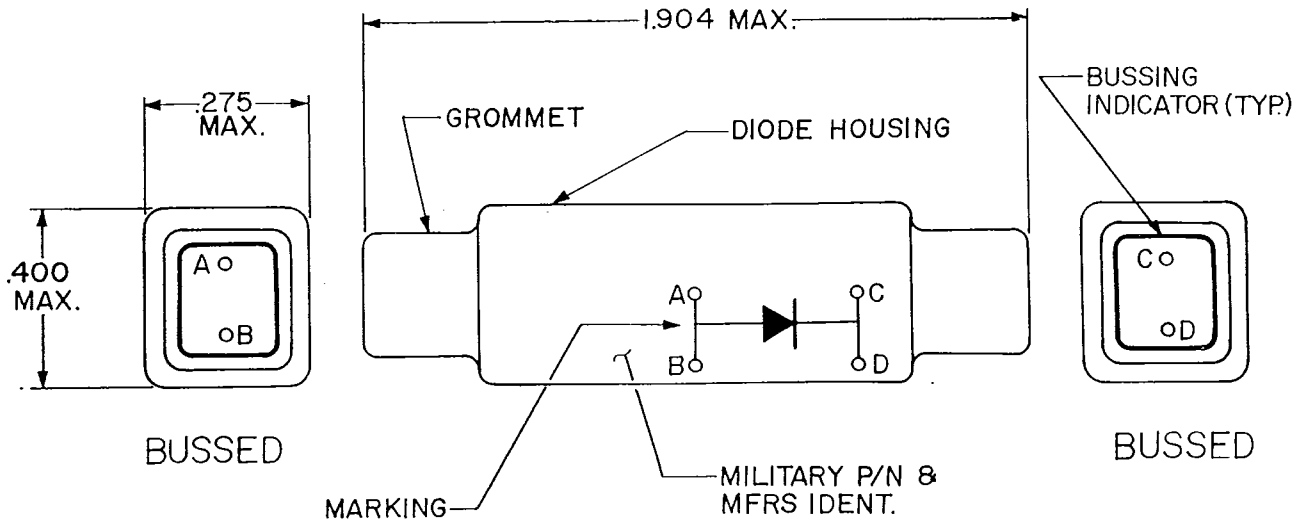


FIGURE 1. Style 1, single diode in-line junction (ref Table I).

TABLE I. Style 1, part numbers.

Part Number 1/ 2/	Contacts (See Note 3)		
	Diode P/N	Size	Part Number
M81714/24-1D001	JAN 1N5618	22	M39029/1-100
M81714/24-1D002	JAN 1N5618	20	M39029/1-101

1/ See Note 6
2/ See Note 7

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

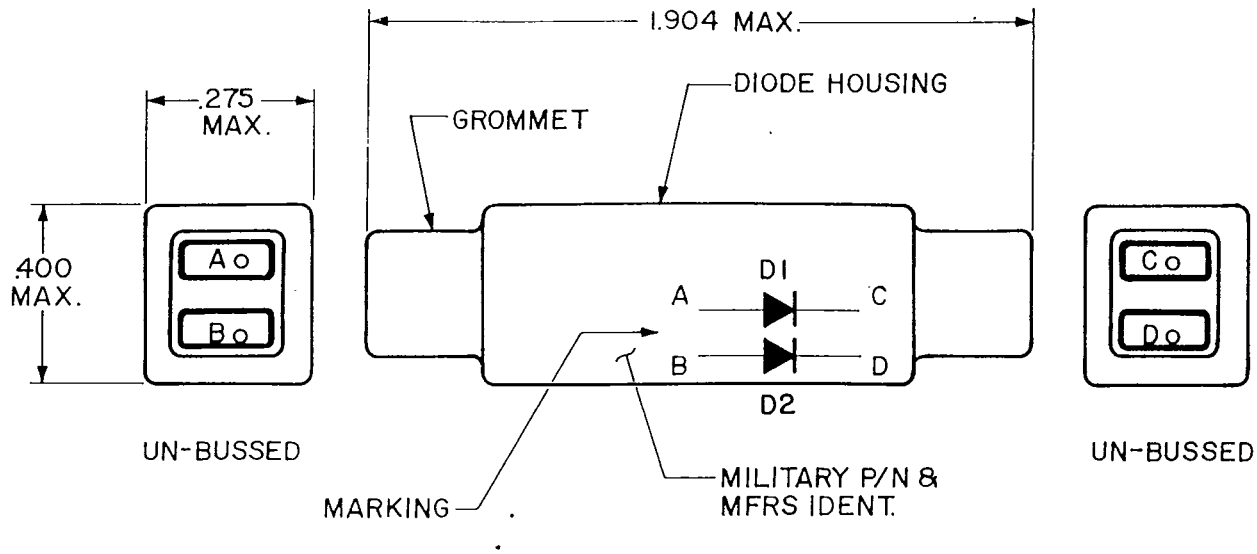


FIGURE 2. Style 2, two diode in-line junction (ref Table II).

TABLE II. Style 2, part numbers.

Part Number 1/ 2/	Ref	Diode P/N	Contacts (See Note 3)	
			Size	Part Number
M81714/24-2D001	D1	JAN 1N5618	22	M39029/1-100
	D2	JAN 1N5618	22	M39029/1-100
M81714/24-2D002	D1	JAN 1N5618	20	M39029/1-101
	D2	JAN 1N5618	20	M39029/1-101

1/ See Note 6
2/ See Note 7

Inch	mm
.275	6.99
.287	7.29
.400	10.16
.408	10.36
.468	11.89
1.904	48.36
2.840	72.14

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

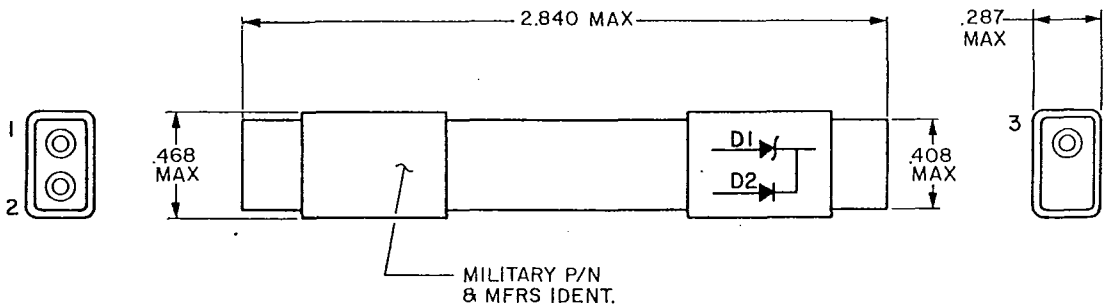


FIGURE 3. Style 3, two diodes in-line junction (Zener & low power rect).

TABLE III. Part numbers for style 3.

Military Part Number 1/ 2/	Ref	Diode P/N	Contacts	
			Size	Part Number
M81714/24-3D001	D1 D2	1N5333** JAN 1N647	16	M39029/1-102

1/ See Note 6.
** Joint Electronic Design Engineering Council (EIA), 2001 Eye Street, N.W., Washington, DC 20006.
2/ See Note 7.

REQUIREMENTS:

1. MATERIALS:

   a. Current carrying members of the in-line junction shall be in accordance with the in-line junction specification.

   b. Housing shall be covered by shrink tubing or shrouded with grommet material.

NOTES:

1. Dimensions are in inches.

2. MIL-T-81714 requirements apply to basic in-line junction only. For rating and characteristics of electronic component(s), consult component specification.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

3. Tool for contact inserting/removal is M81969/14-02 or M81969/8-04 or M81969/8-06 and shall be ordered separately.

4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

5. International interest, see specification MIL-T-81714.

6. The part number consists of the letter M, specification sheet number, module class D, style number (see Figures), and electronic component/circuit dash number (see Tables).

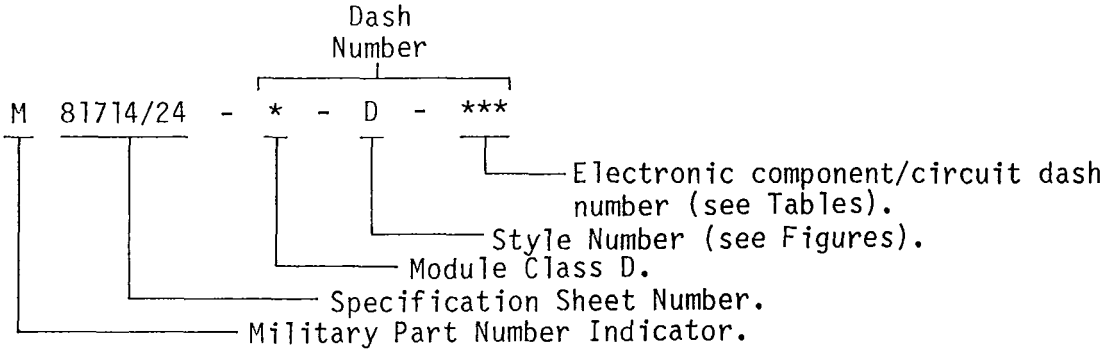

Part number example:

M81714/24-1D001

Diode in-line junction, Size 22, Style 1, with 001 circuit (one JAN 1N5618 diode).

7. Classes A, B and C are components inactive for new design. Only Class D components shall be used for direct Government acquisition.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Navy - AS
(Project No. 5940-1000-23)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.