MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, TERMINAL JUNCTION BLOCKS, SECTIONAL, BUSSING MODULES, FEEDBACK TYPE, SERIES II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the module described herein shall consist of this document and the latest issue of specification MIL-T-81714.

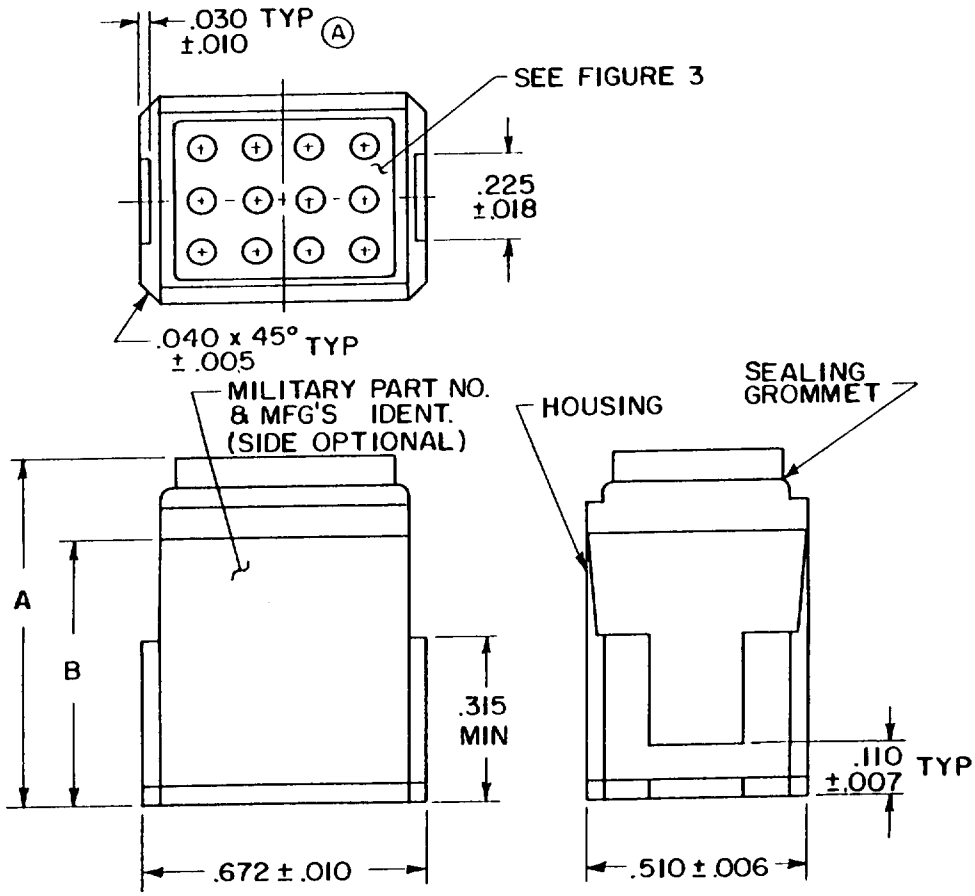


FIGURE 1. Block size 22, 20 and 16.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.


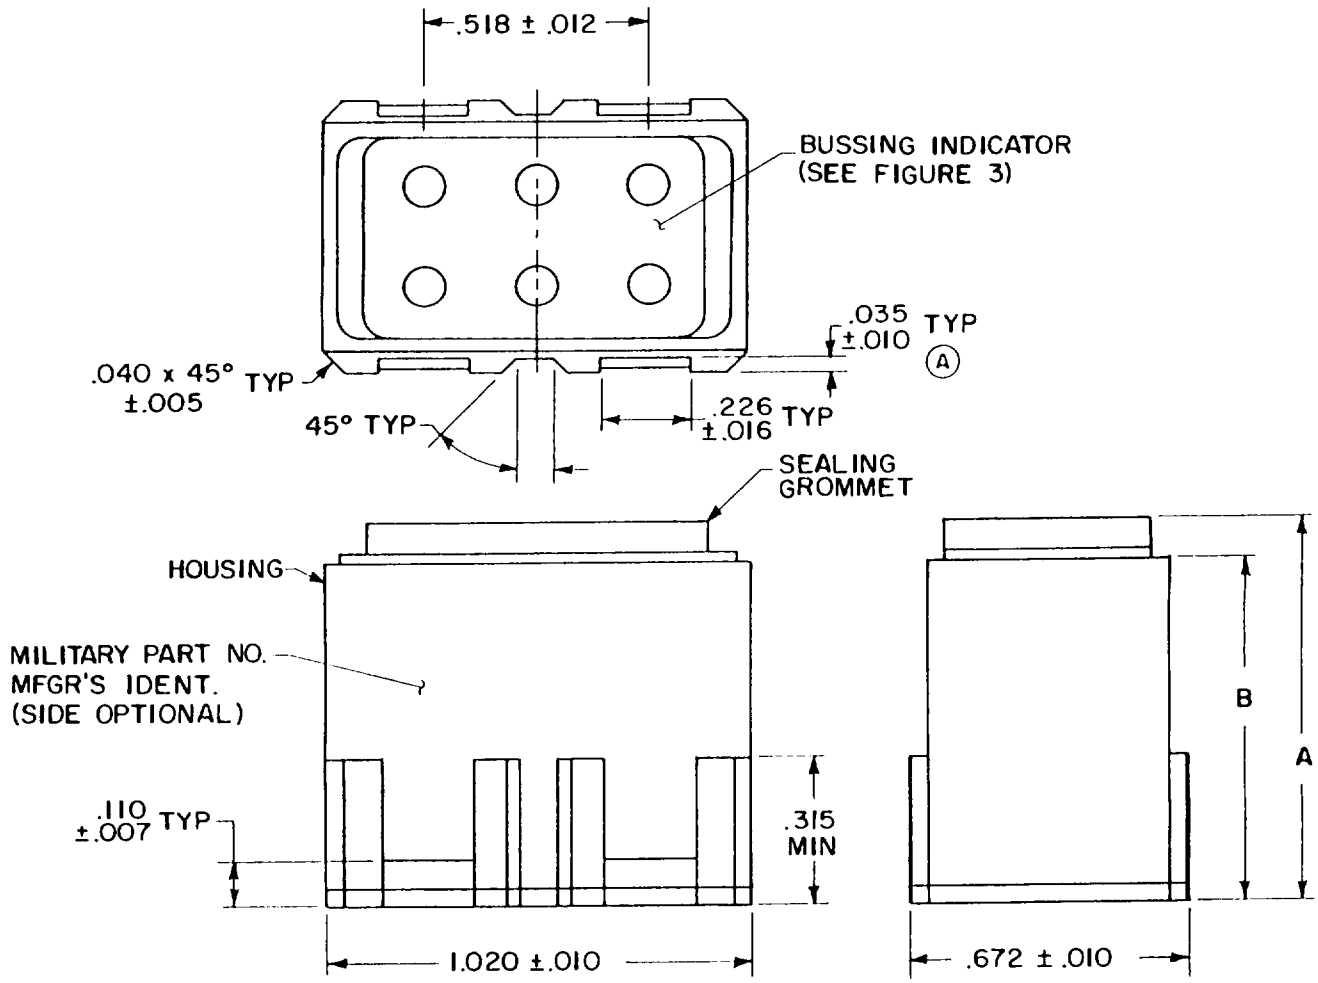


FIGURE 2. Block, size 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

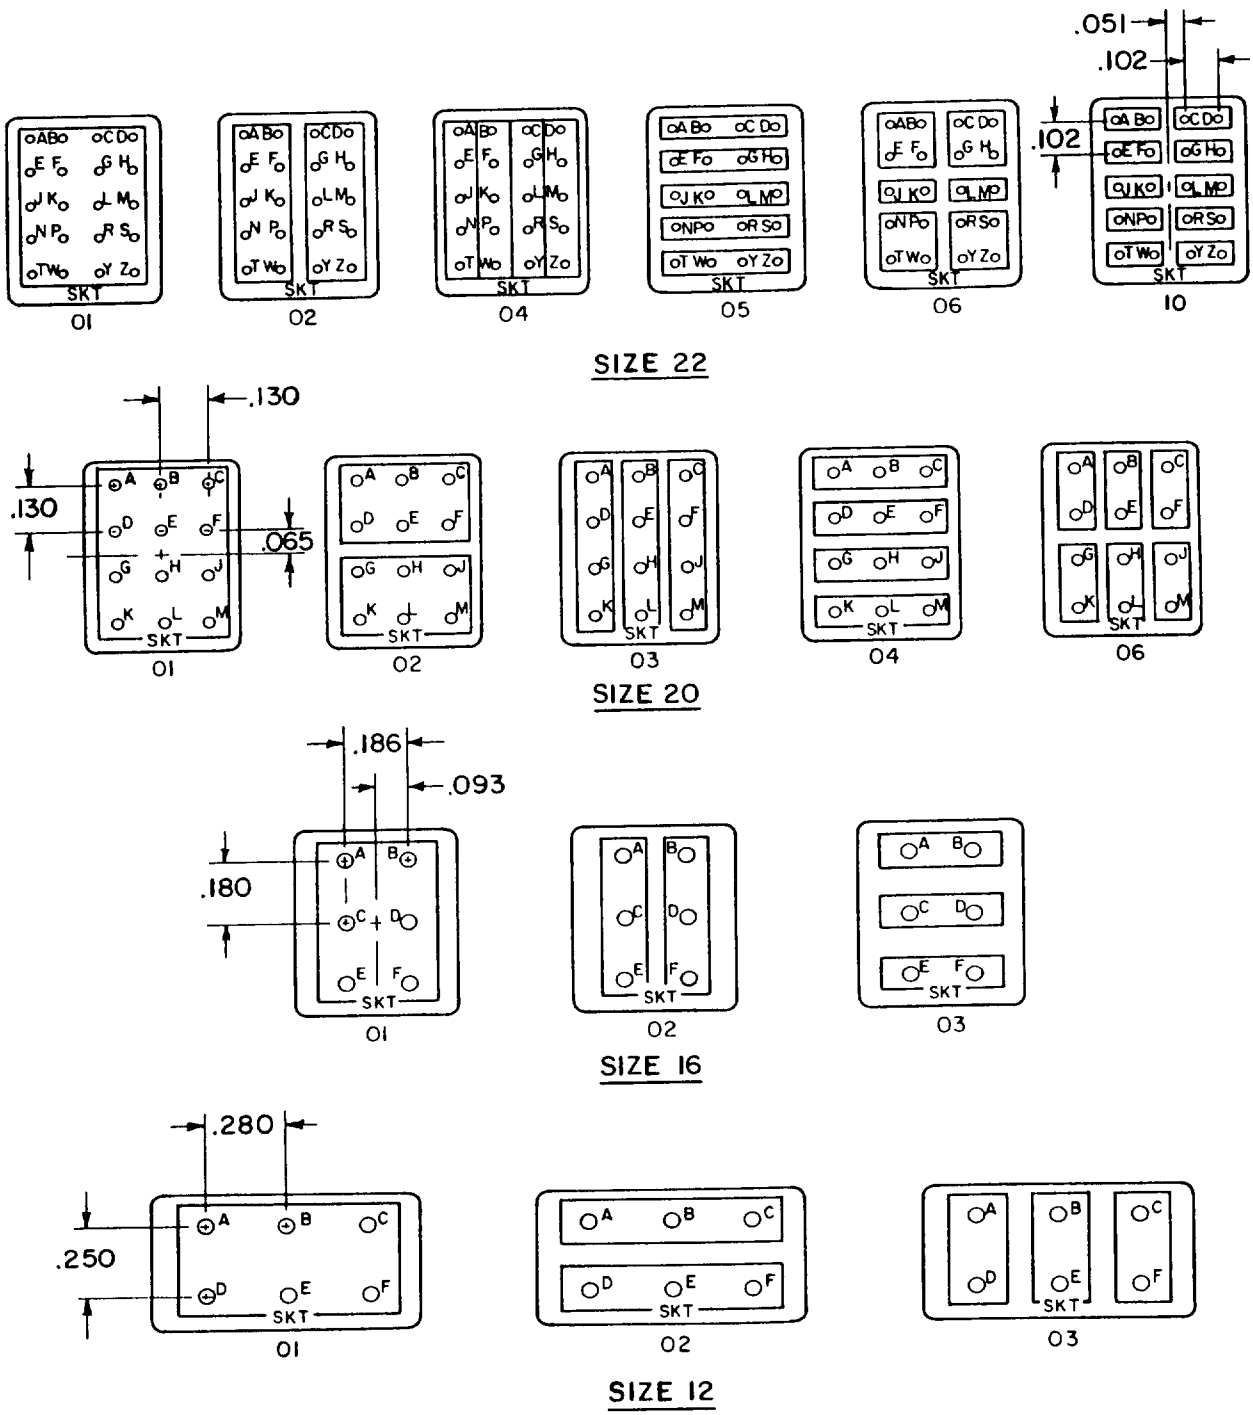

All dimensions of this figure are reference.

FIGURE 3. Bussing arrangements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE 1. Dimensions.

Component Designator	Bussing Designator	Bus/Contact Description	Dimensions A Max	Dimensions B Max
22	01	1 20 pin Bus	.760	.730
22	02	2 10 pin Buses	.760	.730
22	04	4 5 pin Buses	.760	.730
22	05	5 4 pin Buses	.760	.730
22	06	2 2 pin Buses 4 4 pin Buses	.760	.730
22	10	10 2 pin Buses	.760	.730
20	01	1 12 pin Bus	.920	.890
20	02	2 6 pin Buses	.920	.890
20	03	3 4 pin Buses	.920	.890
20	04	4 3 pin Buses	.920	.890
20	06	6 2 pin Buses	.920	.890
16	01	1 6 pin Bus	.920	.890
16	02	2 3 pin Buses	.920	.890
16	03	3 2 pin Buses	.920	.890
12	01	1 6 pin Bus	1.047	1.017
12	02	2 3 pin Buses	1.047	1.017
12	03	3 2 pin Buses	1.047	1.017

Ⓐ TABLE 2.


Component Designator	Contact Part Nos.	Inserting/Removal Tool	End Sealing Plug	Block Removal Tool
22	M39029/22-191	M81969/14-01	MS27488-22	M81714/69-01
20	M39029/22-192	M81969/14-10	M27488-20	M81714/69-01
16	M39029/22-193	M81969/14-03	M27488-16	M81714/69-01
12	M39029/22-605	M81969/16-03 M81969/8 -10	M27488-12	M81714/69-02

INCH	MM	INCH	MM	INCH	MM	INCH	MM
.005	0.13	.040	1.02	.186	4.72	.730	18.54
.006	0.15	.051	1.30	.225	5.72	.760	19.30
.007	0.18	.065	1.65	.226	5.74	.890	22.61
.010	0.25	.083	2.11	.250	6.35	.920	23.37
.012	0.30	.093	2.36	.280	7.11	1.017	25.83
.016	0.41	.102	2.59	.315	8.00	1.020	25.91
.018	0.46	.110	2.79	.510	12.95	1.047	26.59
.030	0.76	.130	3.30	.518	13.16		
.035	0.89	.180	4.57	.672	17.07		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

NOTES: Ⓐ

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01mm) are given tor general information only and are based upon 1 inch = 25.4mm.
3. Block is designed for installation in MIL-T-81714/67 racks or MIL-T-81714/68 brackets.
4. The part number consists of the letter M, specification sheet number, component designator and bussing designator (see Figure 3).

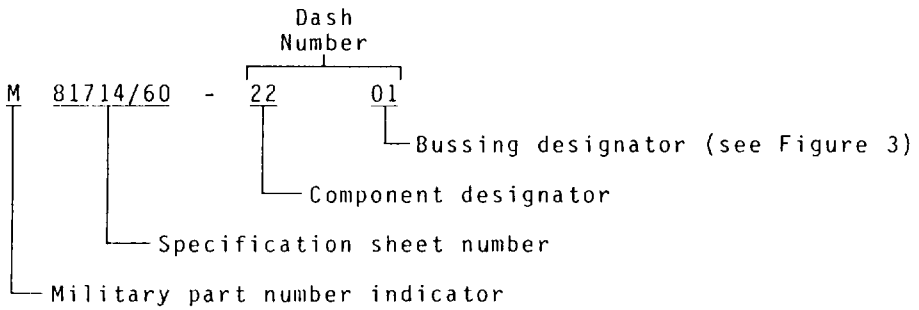

Part Number example:

M81714/60-22-01

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Air Force - 85

(Project No. 5940-1101)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.