MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, TERMINAL JUNCTION BLOCKS, SECTIONAL, GROUNDING MODULES, STUD AND FLANGE TYPE MOUNTING, SERIES II

This amendment forms a part of Military Specification MIL-T-81714/65, dated 2 March 1968, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

Notes: Add after AN960-10L, (Qty 2)

Requirements: Add new requirement for bending moment;

The assembly shall be mounted in a test fixture as shown below with an adapter attached to the stud or flange as necessary. Apply the required load at distance "L" from the test fixture as shown. The load shall create a bending moment of 20 inch-lbs. for sizes 22, 20 and 16, and 30 inch-lbs. for size 12. Apply the load at a rate of approximately 1 lb. per second until the required force is achieved and keep it applied for 15 seconds before releasing. There shall be no evidence of separation between the housing and the stud or shell base, or any other damage detrimental to their normal operation.

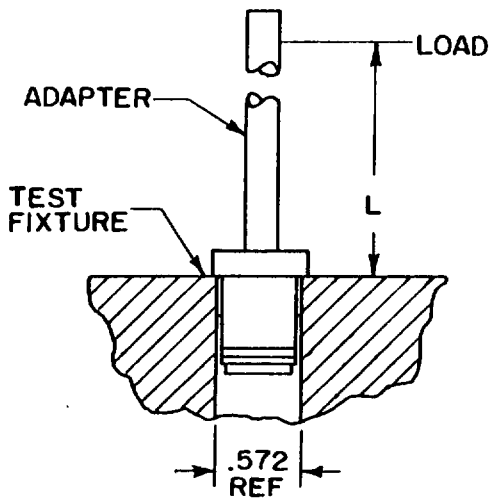

Custidians:
Army - ER
Navy - AS
Air Force - 85

Review activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing activity:
Air Force - 85

(Project number 5940-1104)

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.