MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, TERMINAL JUNCTION BLOCKS,
SECTIONAL, GROUNDING MODULES, STUD AND FLANGE TYPE MOUNTING, SERIES II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the module described herein shall consist of this document and the latest issue of specification MIL-T-81714.

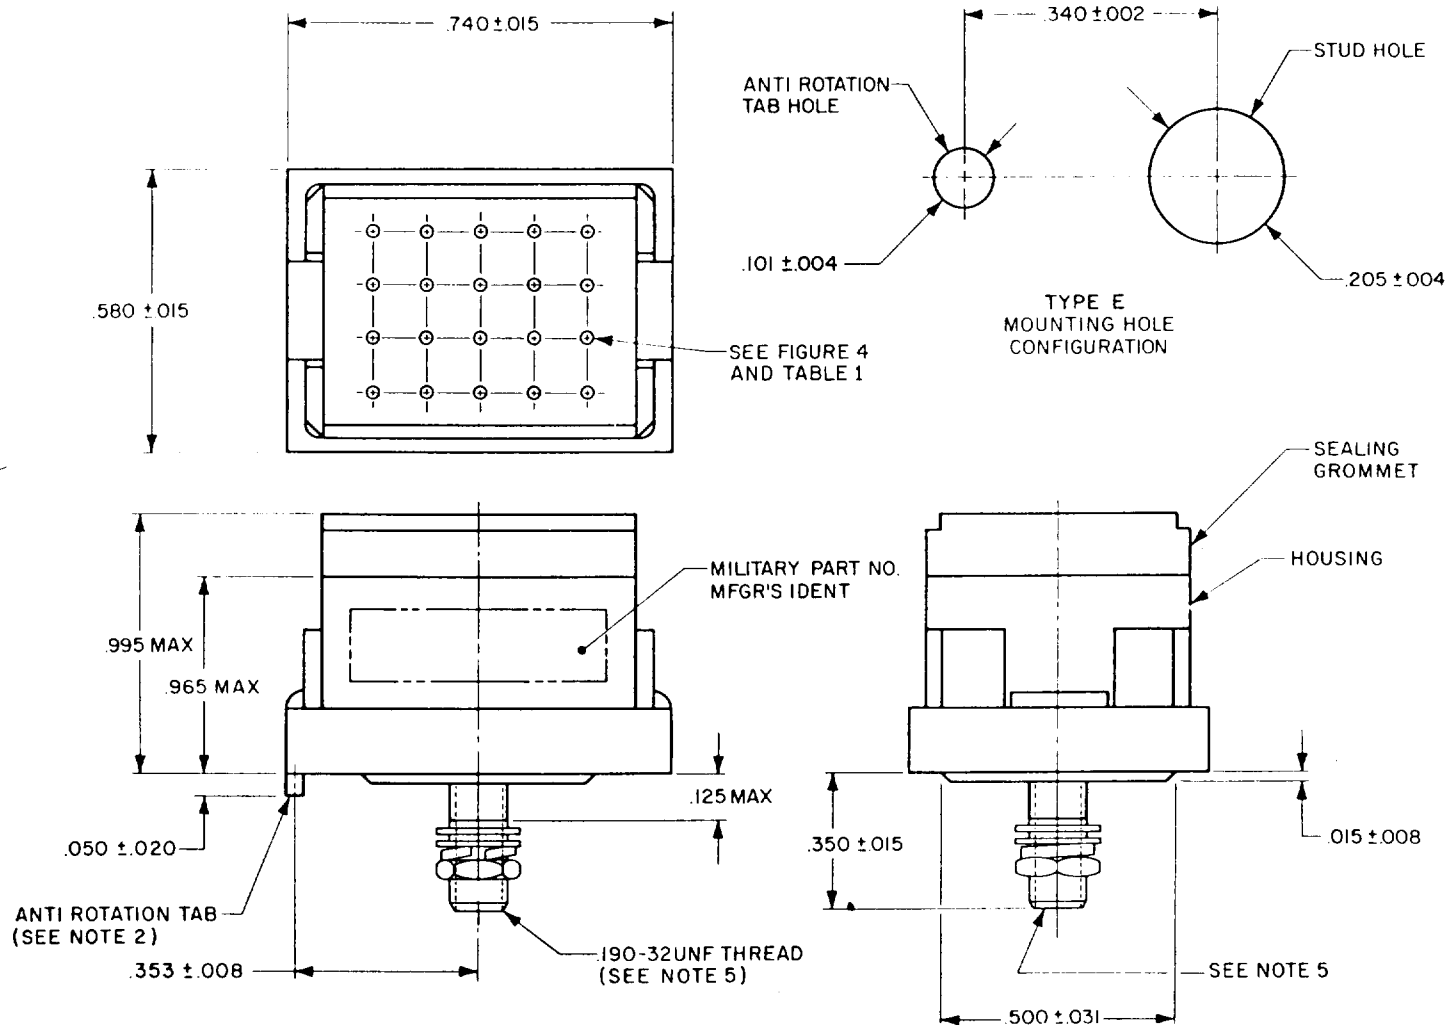


FIGURE 1. Stud mounting type S.

FSC 5940

AMSC N/A

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

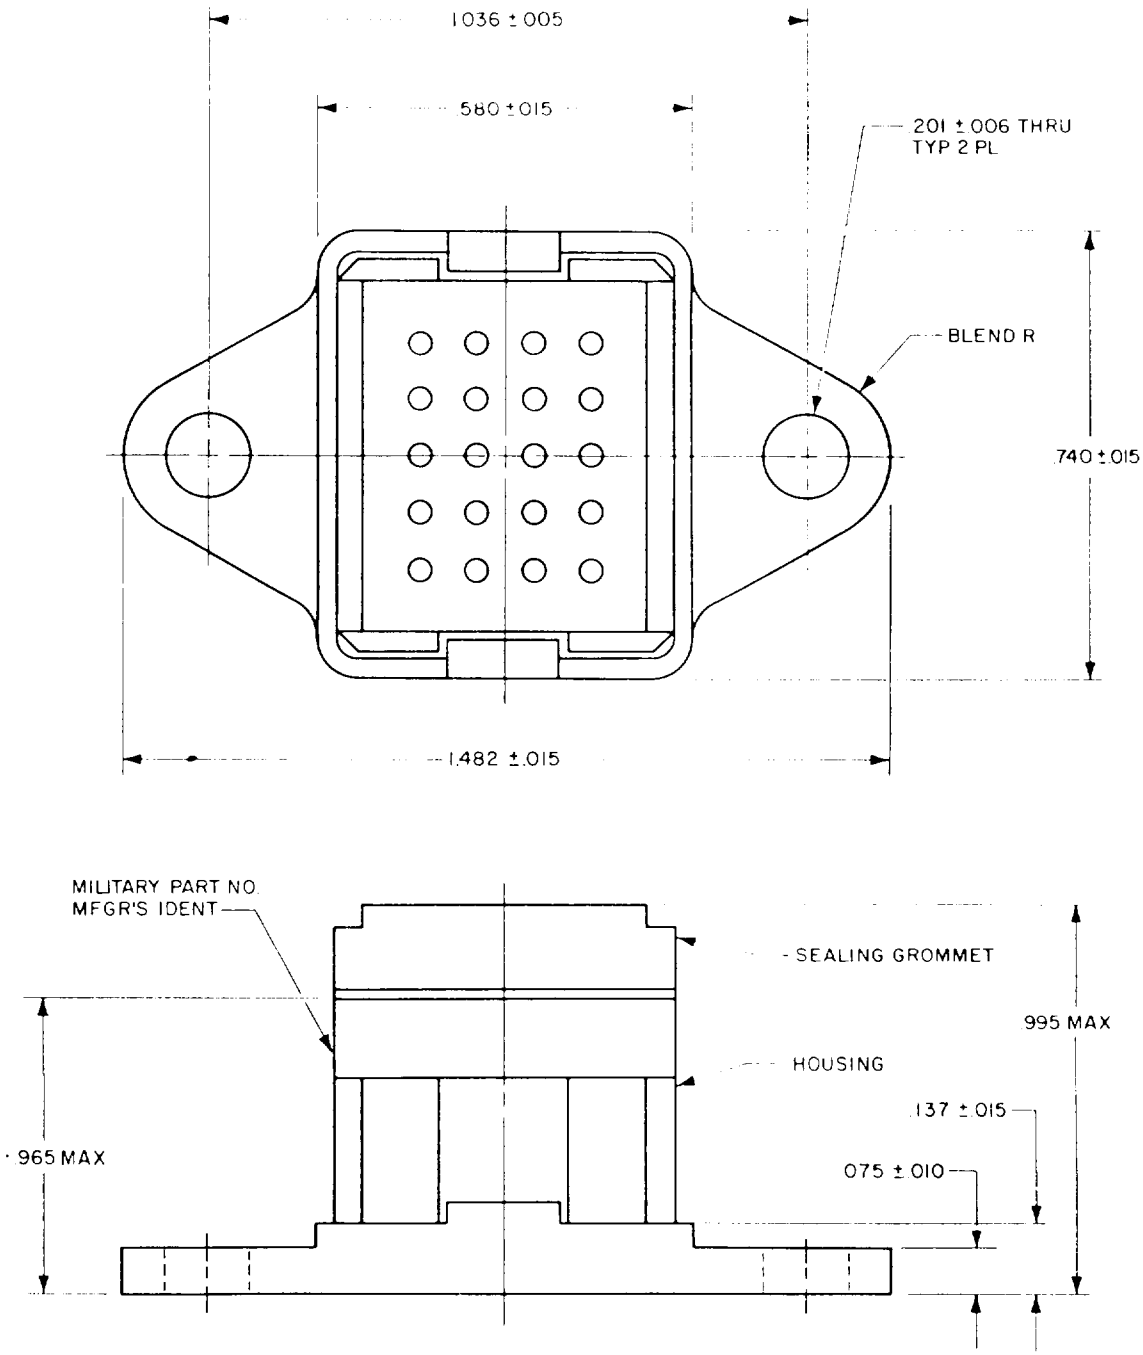


FIGURE 2. Flange mounting type F (all except block size 12).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.


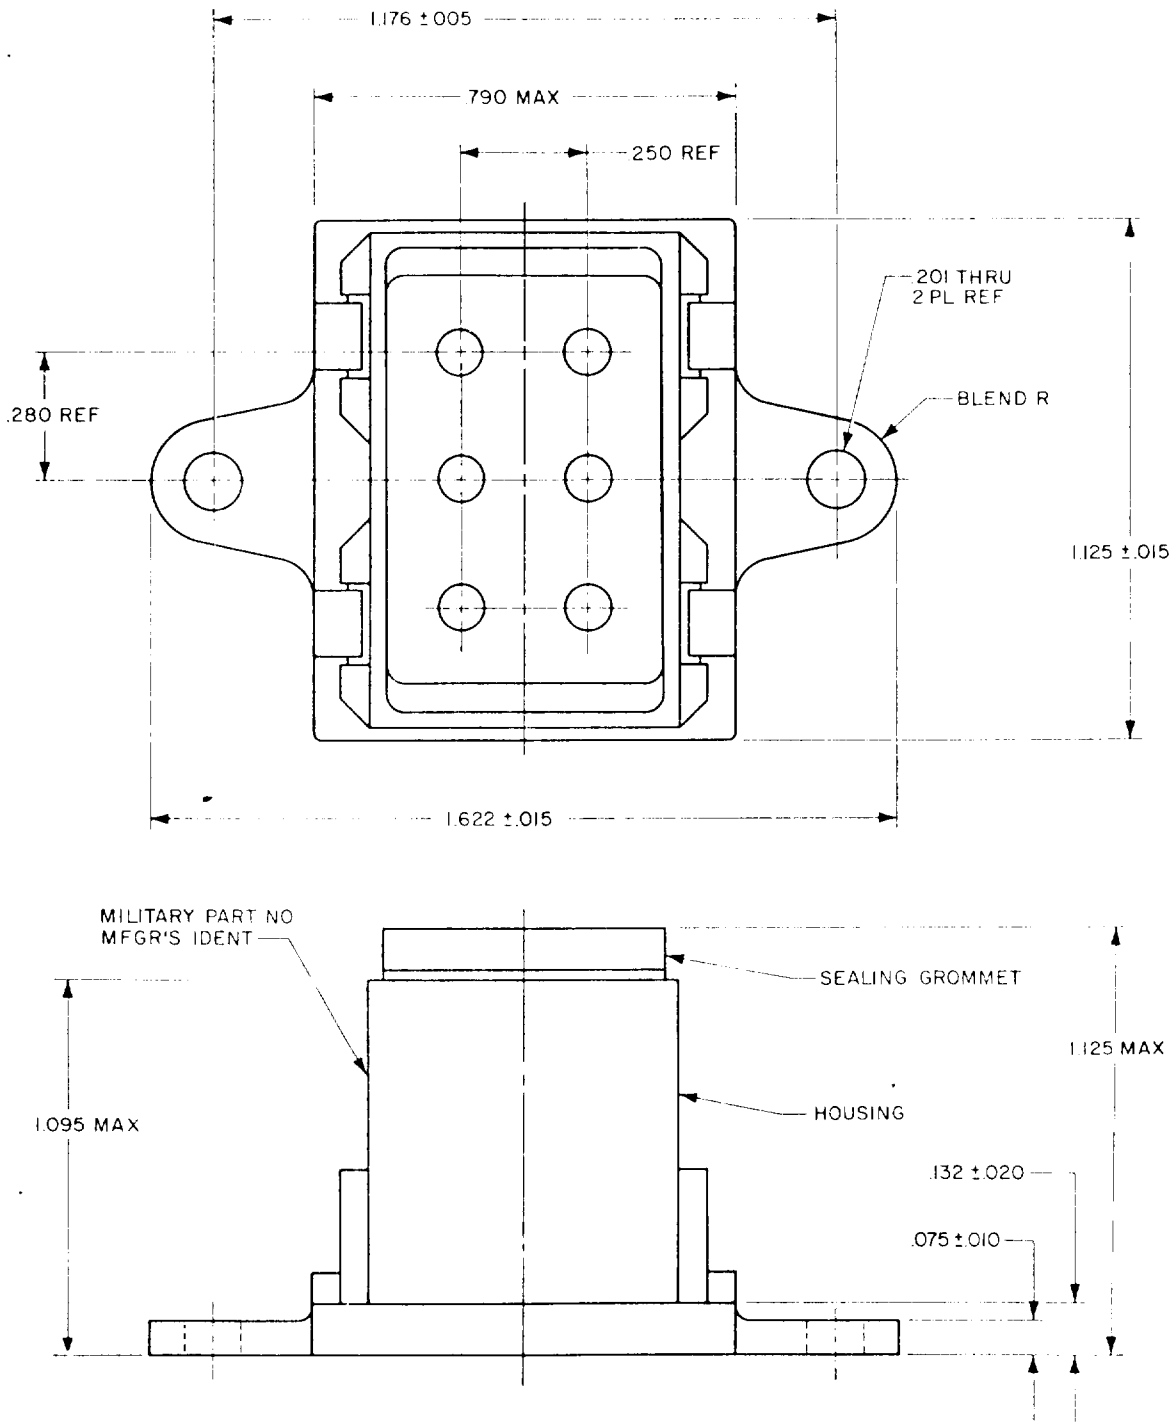


FIGURE 3. Flange mounting type F, block size 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

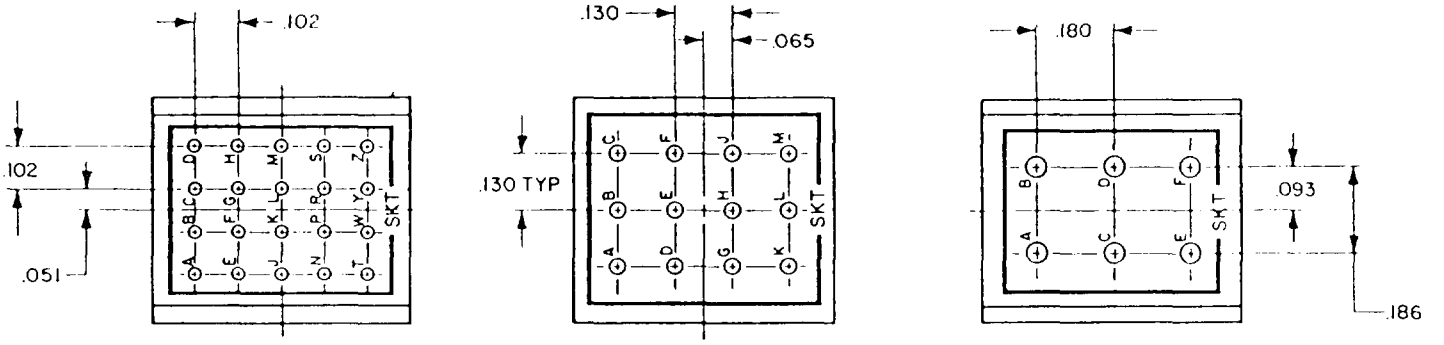

All dimensions of this figure are reference dimensions.

FIGURE 4. Type S and F.

TABLE 1.

Component Designator	Bussing Arrangement	Type	Contact Inserting/ Removal Tool	End Sealing Plug	Figure
22	22	S & F	M81969/16-04	MS27488-22	4
20	20	S & F	M81969/14-02	MS27488-20	4
16	16	S & F	M81969/14-03	MS27488-16	4
12 (See Page 3)	12	F only	M89169/16-03	MS27488-12	3

Inch	mm	Inch	mm	Inch	mm	Inch	mm
.002	0.05	.065	1.65	.186	4.72	.740	18.79
.004	1.01	.075	1.90	.201	5.10	.790	20.06
.005	0.12	.093	2.36	.205	5.20	.965	24.51
.006	0.15	.101	2.56	.250	6.35	.995	25.27
.008	0.20	.102	2.59	.280	7.11	1.036	26.31
.010	0.25	.125	3.17	.340	8.63	1.095	27.81
.015	0.38	.130	3.30	.350	8.89	1.125	28.57
.020	0.50	.132	3.35	.353	8.96	1.176	29.87
.031	0.78	.137	3.47	.500	12.7	1.482	37.64
.050	1.27	.180	4.57	.580	14.73	1.622	41.19
.051	1.29						

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Finish:

   a. The shell shall be tin plated in accordance with MIL-T-10727 .00025 inch minimum over a suitable nickel underplate.

   b. The stud shall be gold plated in accordance with MIL-G-45204, Type I, Grade C, Class 00 over a suitable nickel underplate.

NOTES:

1. Dimensions are in inches.


2. Type S (only) blocks shall be supplied with the following mounting hardware:

Hex Nut	AN 315-3
Flat Washer	AN960-10L
Lock Washer	MS35333-39

3. Anti rotation tab shall enter into mounting hole.

4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

5. The part number consists of the letter M, specification sheet number, component designator and mounting type (S or F).

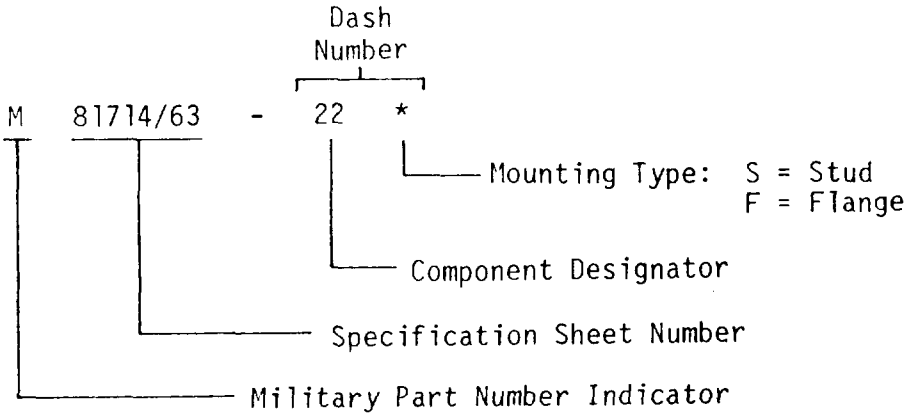

Part Number example:

M81714/63-22S

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Air Force - 85
(Project Number 5940-1000-38)

Agent:
Navy - AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.