MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM, TERMINAL JUNCTION BLOCKS,
SECTIONAL, WIRE IN-LINE JUNCTIONS, SERIES II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the splices described herein shall consist of this document and the latest issue of specification MIL-T-81714.

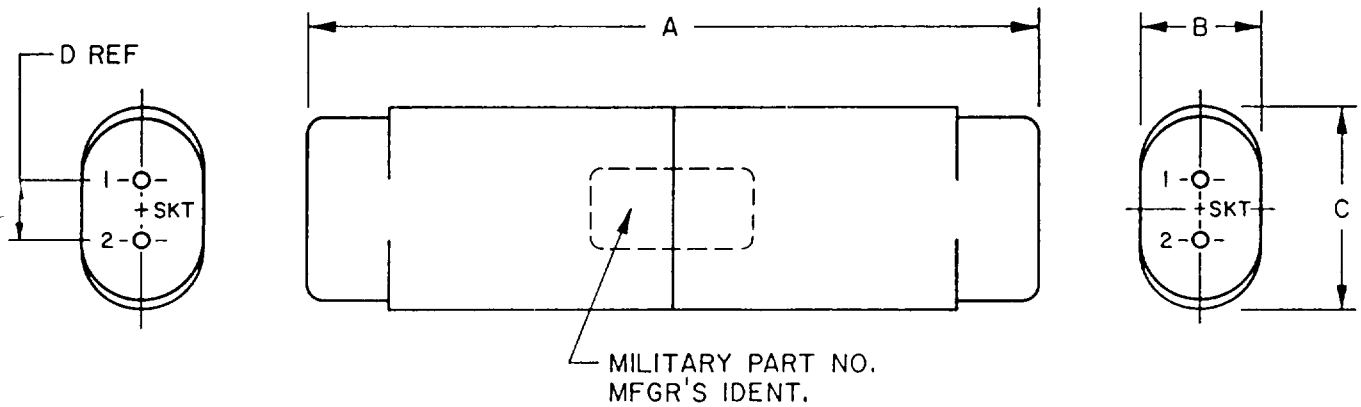



FIGURE 1. Wire in-line junction type: 2.

| Part Number | Component Designator | A Max | B Max | C Max | D Ref |
|---|---|---|---|---|---|
| M81714/65-22-2 | 22 | 1.322 (33.58) | .240 (6.05) | .384 (9.75) | .120 (3.05) |
| M81714/65-20-2 | 20 | 1.428 (36.27) | .271 (6.88) | .481 (12.22) | .150 (3.81) |
| M81714/65-16-2 | 16 | 1.428 (36.27) | .304 (7.72) | .548 (13.92) | .184 (4.67) |
| M81714/65-12-2 | 12 | 1.704 (43.28) | .367 (9.32) | .674 (17.12) | .247 (6.27) |

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

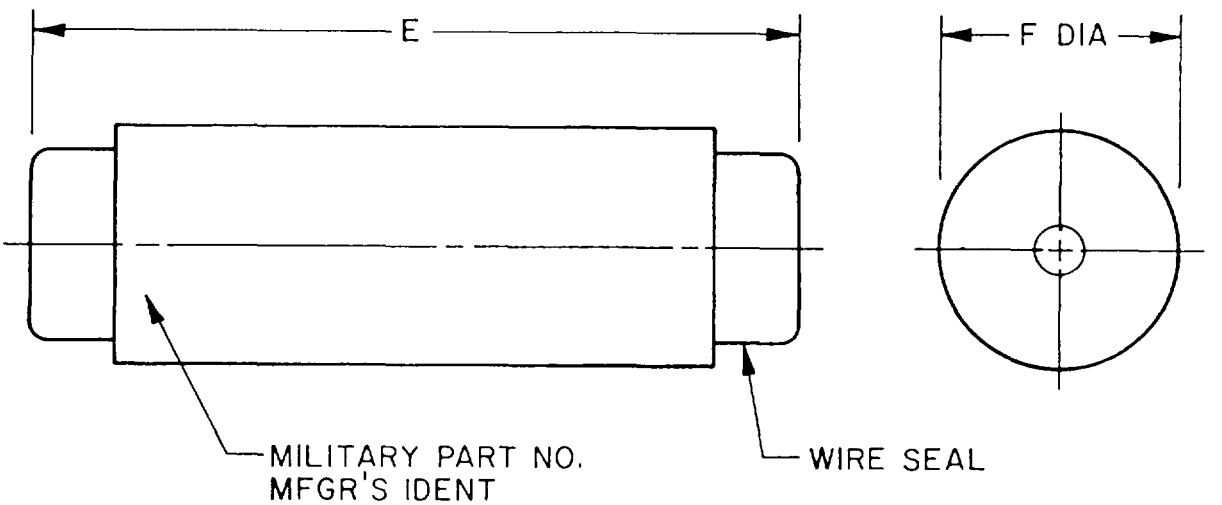



FIGURE 2. Wire in-line junction splice type: 1.


| Part Number | Component Designator | E Max | F Max |
|---|---|---|---|
| M81714/65-22-1 | 22 | 1.310 | .230 |
| M81714/65-20-1 | 20 | 1.434 | .290 |
| M81714/65-16-1 | 16 | 1.452 | .324 |
| M81714/65-12-1 | 12 | 1.403 | .387 |

| INCH | mm | INCH | mm | INCH | mm | INCH | mm |
|---|---|---|---|---|---|---|---|
| .120 | 3.05 | .271 | 6.88 | .387 | 9.83 | 1.428 | 36.27 |
| .150 | 3.81 | .290 | 7.37 | .481 | 12.22 | 1.403 | 35.64 |
| .184 | 4.67 | .304 | 7.72 | .548 | 13.92 | 1.434 | 36.42 |
| .230 | 5.84 | .324 | 8.23 | .674 | 17.12 | 1.452 | 36.88 |
| .240 | 6.05 | .367 | 9.32 | 1.310 | 33.27 | 1.704 | 43.28 |
| .247 | 6.27 | .384 | 9.75 | 1.322 | 33.58 | | |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Housing may be metal.
3. Each wire in-line junction (Type 1) is supplied with two (2) contacts and no sealing plug. Each wire in-line junction (Type 2) is supplied with five (5) contacts and one (1) sealing plug. Contact inserting/removal tools are to be ordered separately, as required. No end sealing plugs required with type 1.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
5. The part number consists of the letter M, specification sheet number, component designator and wire in-line junction type (1 = single, 2 = double).

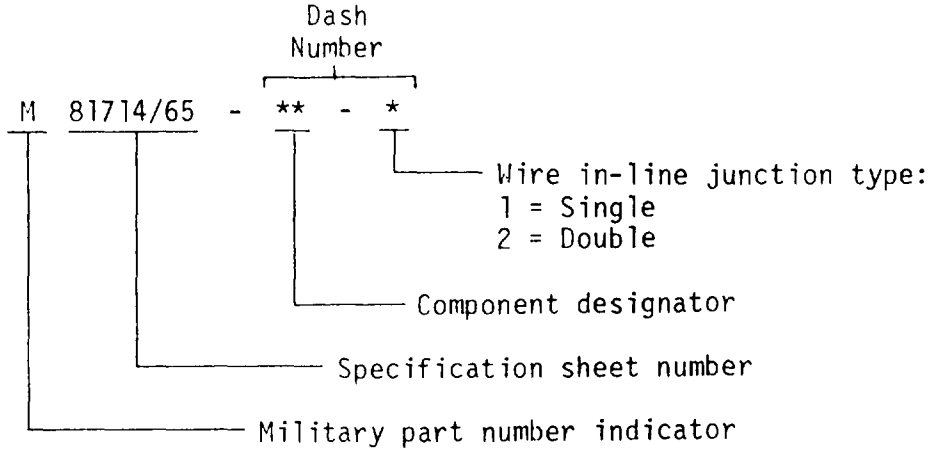


Part Number example:

M81714/65-22-1

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing activity:
Air Force - 85
Project Number 5940-1000-40

Agent:
Navy - AS



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.