
MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM,
RACK ASSEMBLY, TRACK, FEEDBACK TYPE, SERIES II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the rail described herein shall consist of this document and the latest issue of specification MIL-T-81714.

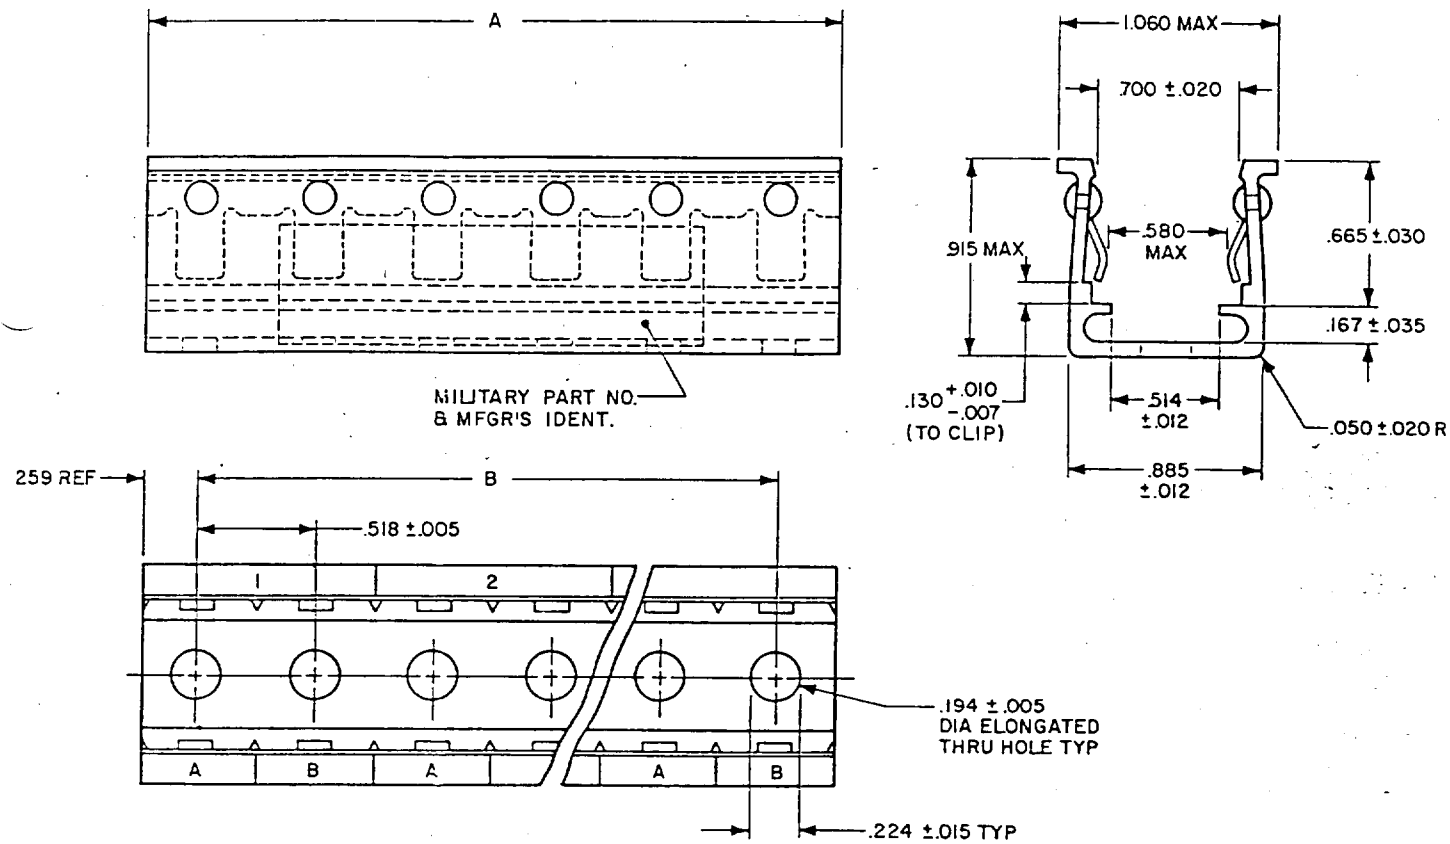

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

Part Number		Quantity of Blocks per Rack	A ± .015	B ± .015
M81714/67-02		2	1.036	.518
M81714/67-03		3	1.554	1.036
M81714/67-04		4	2.072	1.554
M81714/67-05		5	2.590	2.072
M81714/67-06		6	3.108	2.590
M81714/67-07		7	3.626	3.108
M81714/67-08		8	4.144	3.626
M81714/67-09		9	4.662	4.144
M81714/67-10		10	5.180	4.662
M81714/67-12		12	6.216	5.698
M81714/67-13		13	6.734	6.216
M81714/67-14		14	7.252	6.734
M81714/67-15		15	7.770	7.252
M81714/67-16		16	8.288	7.770
M81714/67-18		18	9.324	8.806
M81714/67-19		19	9.842	9.324
M81714/67-20	M81714/67-120	20	10.360	9.842
M81714/67-21		21	10.878	10.360
	M81714/67-125	25	12.950	12.432
	M81714/67-130	30	15.540	15.022
		32	16.576	16.058
	M81714/67-140	40	20.720	20.202

Inch	mm	Inch	mm	Inch	mm	Inch	mm
.005	0.12	.194	4.92	4.662	118.41	10.360	263.14
.007	0.17	.224	5.68	5.180	131.57	10.878	276.30
.010	0.25	.514	13.05	5.698	144.73	12.432	315.77
.012	0.30	.518	13.16	6.216	157.89	12.950	328.93
.015	0.38	1.036	26.31	6.734	171.04	15.022	381.56
.020	0.50	1.554	39.47	7.252	184.20	15.540	394.72
.030	0.76	2.072	52.63	7.770	197.36	16.058	407.87
.035	0.88	2.590	65.79	8.288	210.52	16.576	421.03
.050	1.27	3.108	78.94	8.806	223.67	20.202	513.13
.130	3.30	3.626	92.10	9.324	236.83	20.720	526.29
.167	4.24	4.144	105.26	9.824	249.99		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material:

   Rack - Aluminum alloy, 6061-T4.
   Clip and Rivet - Corrosion-resistant steel in accordance with QQ-S-766.

2. Finish:

   Black anodize in accordance with MIL-A-8625.

3. Rack maintenance aging. The applicable block shall be installed and removed from the same position in the rack for 100 cycles. Removal shall be accomplished by use of the M81714/69 tool. Any damage to the block or rack, such as broken clips, shall be cause for rejection. This test shall be performed prior to salt spray testing.


NOTES:

1. Dimensions are in inches.

2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

3. For applicable blocks see M81714/60, M81714/61 and M81714/62. For applicable block removal tools see M81714/69. Blocks and tools are not part of this rack assembly and shall be ordered separately.

4. The part number consists of the letter M, specification sheet number, and dash number (see Table I).

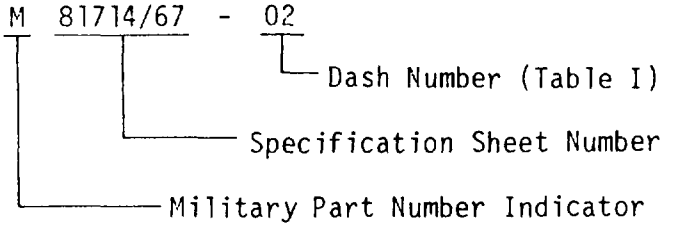

Part Number example:

M81714/67-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Air Force - 85
(Project No. 5940-1000-44)

Agent:
Navy - AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.