MILITARY SPECIFICATION SHEET

TERMINAL JUNCTION SYSTEM,
BLOCK MOUNTING BRACKET, SERIES II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the bracket described herein shall consist of this document and the latest issue of specification MIL-T-81714.

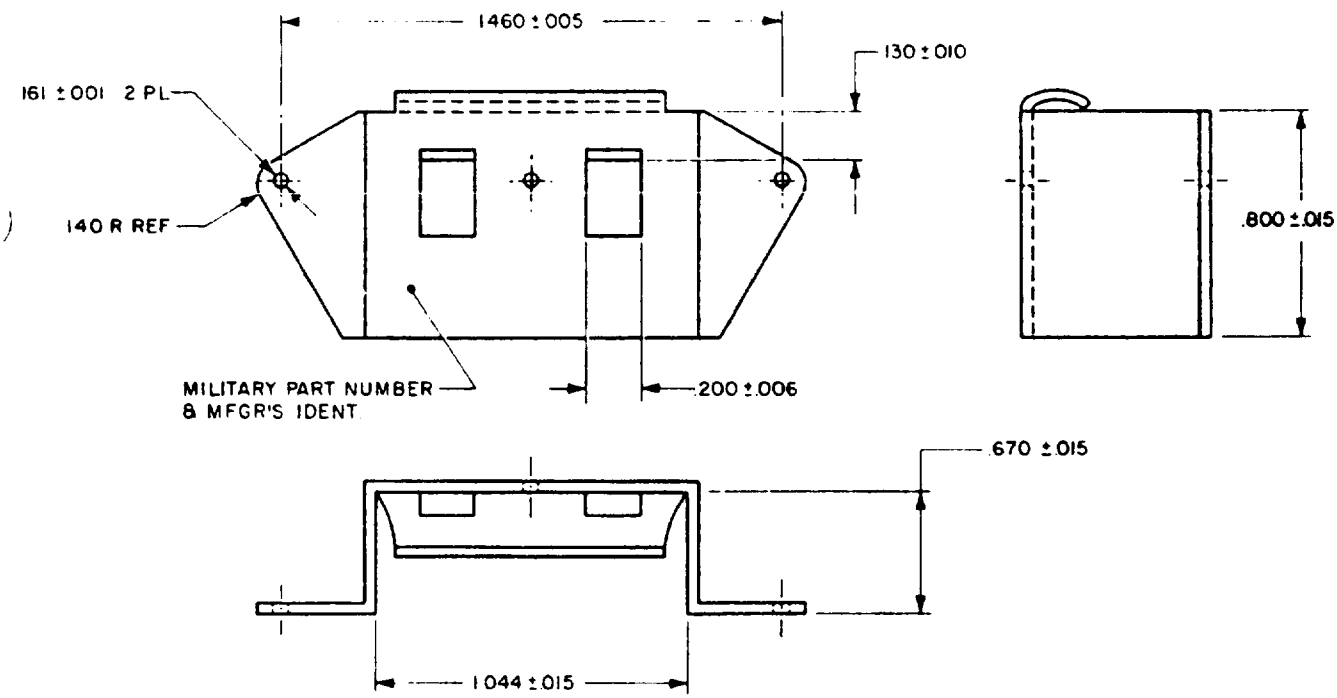


FIGURE 1. Block mounting bracket.

AMSC N/A
FSC 5940

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

INCH	mm	INCH	mm
.001	0.03	.161	4.09
.005	0.13	.200	5.08
.010	0.25	.670	17.02
.015	0.38	.800	20.32
.130	3.30	1.044	26.52
.140	3.56	1.460	37.08

REQUIREMENTS:

1. Materials and finish:

   a. Bracket shall be constructed of aluminum alloy. Finish shall be black anodize.

   b. Brackets with clear cadmium finish shall be limited to +125° temperature ambients.


NOTES:

1. Dimensions are in inches.

2. Metric equivalents (to the nearest .01 mm) are given for information only and are based upon 1 inch = 25.4 mm.

3. Bracket is designed for mounting of MIL-T-81714/60, MIL-T-81714/61 or MIL-T-81714/62 blocks. (Single size 12 block or double size 22, 20 or 16 block acceptance.)

4. The part number consists of the letter M, specification sheet number and dash number.

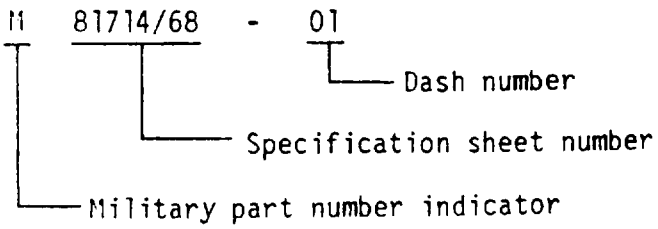

Part Number example:

M81714/68-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review Activities:
Navy - EC, OS
Air Force - 99
DLA - GS

User Activities:
Army - MU, AV, AT, WC, MI
Navy - SH

Preparing Activity:
Air Force - 85
(Project No. 5940-1000-46)

Agent:
Navy - AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:59Z
Check the source to verify that this is the current version before use.