12 August 1974
SUPERSEDING
MIL-C-43558
19 January 1968

MILITARY SPECIFICATION

CHAPLAIN'S KITS, CATHOLIC AND PROTESTANT, LIGHTWEIGHT, FOR ACTIVE COMBAT APPLICATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers Catholic and Protestant lightweight Chaplain's Kits for active combat application (see 6.1).

1.2 Classification. Chaplain's Kits shall be of the following types as specified (see 6.2).

Type I - Catholic Chaplain's Kit
Type II - Protestant Chaplain's Kit

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-1183	-	Plastic Molding Material, Acrylonitrie-Butadiene-Styrene (ABS), Rigid
V-T-285	-	Thread, Polyester
V-T-295	-	Thread, Nylon
QQ-A-200/9	-	Aluminum Alloy, Bar, Rod, Shapes, Tube and Wire, Extruded, 6063
QQ-A-225/1	-	Aluminum Alloy, Bar, Rod and Wire, Rolled, Drawn, or Cold Finished, 1100

QQ-A-250/1 - Aluminum Alloy, 1100, Plate and Sheet
CCC-P-91 - Padding; Rubberized, Curled Hair
DDD-L-20 - Label; For Clothing, Equipage and Tentage, (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-S-1698 - Slings, Carrying, Bag and Case
MIL-T-5038 - Tape, Textile and Webbing, Textile, Reinforcing Nylon
MIL-W-5625 - Webbing, Textile, Nylon, Tubular
MIL-C-7219 - Cloth, Duck, Nylon
MIL-A-8625 - Anodic Coatings for Aluminum and Aluminum Alloys
MIL-L-11075 - Loop, Strap Fastener
MIL-W-17337 - Webbing, Textile, Woven, Nylon
MIL-F-21840 - Fastener Tape, Hook and Pile, Synthetic
MIL-P-26514 - Polyurethane Foam, Rigid or Elastic, for Packaging
MIL-W-27265 - Webbing, Textile, Woven Nylon, Impregnated
MIL-C-40638 - Candles, Ecclesiastical (and Taper, Candle Lighter)
MIL-C-40039 - Cloth, Coated, Nylon, Vinyl Coated
MIL-T-43548 - Thread, Polyester, Cotton Covered
MIL-T-43624 - Thread, Polyester, Spun
MIL-C-43863 - Cloth, Broadcloth, Polyester/Cotton Precured

STANDARDS

FEDERAL

FED-STD-595 - Colors
FED-STD-751 - Stitches, Seams and Stitching

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

ARMY NATICK LABORATORIES

14-1-121 - Chaplain's Kits, Catholic and Protestant, Combat, Lightweight; Assembly Complete
14-1-122 - Carrying Case Assembly and Sections
14-1-123 - Body, End and Cover Assemblies and Details
14-1-124 - Assemblies and Details
14-1-125 - Strap Assemblies
14-1-126 - Tray

14-1-127 - Insert, Nesting
14-1-128 - Stand, Bible and Missal
14-1-129 - Chalice Assembly
14-1-130 - Paten, Chalice
14-1-131 - Communion Paten
14-1-132 - Holder, Candle, W/Flame Protector
14-1-133 - Ciborium
14-1-136 - Bell, Sanctus
14-1-137 - Crucifix, Assembly
14-1-138 - Cross Assembly
14-1-139 - Chalice Insert

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.3 and 6.5).

3.2 Standard design. The cloth components, except the carrying case, of the Chaplain's Kit delivered under this specification shall be the manufacturer's standard design, except for any changes necessary to comply with specification requirements.

* 3.3 Materials and components. Materials and components shall be as specified herein and on the applicable drawings. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial ecclesiastical items provided the completed item complies with all provisions of this specification.

3.3.1 Aluminum.

* 3.3.1.1 Aluminum sheet. The aluminum sheet shall conform to any temper, 1100 series of QQ-A-250/1.

* 3.3.1.2 Aluminum bar. The aluminum bar shall conform to any temper, 1100 or 6063 series of QQ-A-225/1 or QQ-A-200/9, respectively, as applicable.

3.3.2 Brass. The brass shall be in accordance with the manufacturer's standard practice.

* 3.3.3 Cloth, broadcloth, polyester/cotton, precured. The cloth shall conform to the requirements of MIL-C-43863, except that the color shall be white, the weight of the cured cloth shall be a minimum of 2.8 ounces per square yard, the requirements for color fastness, non-fibrous materials and requirements of 4.4.2.2.3 of MIL-C-43863 are not applicable.

* 3.3.4 Nylon, cloth. The nylon cloth shall be 70, plus or minus 4 denier warp and filling, 1.75 ounces to 1.85 ounces per square yard, having a minimum thread count of 100 per inch in the warp and 68 per inch in the filling.

3.3.5 Nylon thread. Nylon thread shall conform to size A, type I, class 1, of V-T-295. The color of the thread shall be U.S.A. white shade AG, cable no. 66049.

* 3.3.6 Polyester thread. The thread for sewing the precured broadcloth items shall be cotton covered polyester thread conforming to MIL-T-43548 or spun polyester thread conforming to class 1 or class 2 of MIL-T-43624, Ticket No. 50, 3-ply, white color.

3.3.7 High impact molding plastic. The high impact molding plastic sheet shall be gray, approximately color chip 36173 of FED-STD-595 and shall conform to type V or type VI of L-P-1183.

* 3.3.8 Polyurethane foam. The polyurethane foam shall be black and shall conform to type I, class 2, molded of MIL-P-26514. The density shall be 3.5 to 4 pounds per cubic foot.

3.4 Components. The components of the type I and type II kits shall conform to the quantities specified in table I.

TABLE I. Components

Nomenclature	Quantity required per kit Type I	Type II	Reference paragraph
Bell	1	-	3.5.1
Bottle, plastic	2	2	3.5.2
Candle	2	2	3.5.3
Candle holder w/flame protector	2	2	3.5.4
Chalice	1	1	3.5.5
Chalice insert	-	1	3.5.5
Chalice paten	1	1	3.5.6
Communion paten	1	1	3.5.6
Ciborium	1	1	3.5.7
Cross	-	1	3.5.8
Crucifix	1	-	3.5.8
Missal	1	-	3.5.9
Host tube	1	1	3.5.10
Host box	1	1	3.5.11
Stand	1	1	3.5.12
Alb	2	-	3.5.13
Altar cloths	3	3	3.5.14
Amice	2	-	3.5.15
Carrying case	1	1	3.5.16
Corporal	3	3	3.5.17
Cincture	1	-	3.5.18
Finger towel	3	-	3.5.19
Pall	2	2	3.5.20
Purificator	3	3	3.5.21
Scarf	-	1	3.5.22
Vestment set	1	-	3.5.23

3.5 Details of components. Details of components shall be as specified herein. Tolerances for overall dimensions on fabric components shall be in accordance with the manufacturer's commercial practice unless otherwise specified herein.

3.5.1 Bell. The bell shall be fabricated of the brass specified in 3.3.2 and shall conform to Drawing 14-1-136.

3.5.2 Bottle, plastic. The bottle shall be a commercial polyethylene "Modern Round" bottle. The bottle shall have a nominal capacity of eight ounces and shall be provided with a screw cap.

3.5.3 Candle. Candle shall conform to type II, size 1, of MIL-C-40638.

3.5.4 Candle holder. The candle holder shall be furnished with a flame protector. The candle holder and flame protector shall be fabricated of the aluminum specified in 3.3.1.1 and shall conform to Drawing 14-1-132.

3.5.5 Chalice and chalice insert. The chalice base shall be fabricated of the aluminum specified in 3.3.1.1. The chalice cup and the chalice insert shall be fabricated of the brass specified in 3.3.2. The chalice shall conform to Drawing 14-1-129. The chalice insert shall conform to Drawing 14-1-139.

3.5.6 Patens. Patens shall be fabricated of the brass specified in 3.3.2. The chalice paten shall conform to Drawing 14-1-130. The communion paten shall conform to Drawing 14-1-131.

* 3.5.7 Ciborium. The ciborium shall be fabricated of the brass specified in 3.3.2 and shall conform to Drawing 14-1-133.

3.5.8 Cross and crucifix. The cross and cross portion of the crucifix shall be fabricated of aluminum bar specified in 3.3.1.2. The cross shall conform to Drawing 14-1-138. The crucifix shall conform to Drawing 14-1-137. The corpus shall be made of zinc aluminum alloy in accordance with the manufacturer's commercial practice.

* 3.5.9 Missal. The missal shall be the latest English version and shall be approved by the Armed Forces Chaplain's Board (see 6.4).

3.5.10 Host tube. The host tube shall be fabricated of clear, odorless, seamless plastic tubing, 1/64 inch thick. The nominal diameter shall be 1-3/8 inches and the overall length shall be 5-7/8 inches plus or minus 1/8 inch. The container shall be provided with two friction fitting plastic caps.

* 3.5.11 Host box. The host box shall be made from clear polystyrene, 2-23/32 inches inside diameter by 5/8 inch deep and have a snug-fitting cover (see 6.6).

* 3.5.12 Stand. The stand for the Missal or Bible shall be fabricated from aluminum specified in 3.3.1.1, except the temper shall be H 14, and shall conform to Drawing 14-1-128.

* 3.5.13 Alb. The alb shall be made from white precured fabric specified in 3.3.3. The finished garment (measured flat) shall be a minimum of 60 inches long, including the neck band, and a minimum of 78 inches in circumference at the bottom. Sleeves shall be tapered from 14 inches at the armhole to 7 inches at the bottom cuff edge. The cuff shall be a double thickness of precured fabric with a tapered width of 5 inches to 3 inches minimum. The bottom shall have a 2

inch hem. The neck band shall consist of one piece of fabric, folded in half along the length and stitched to the neck of the alb to form a tunnel. The top edge of the neck band shall be stitched 1/4 inch from the edge. Precured fabric tape, 1-1/2 yards long, shall be inserted as a drawstring. The front opening from the neckband down shall measure 14 inches and shall be finished with 1 inch facings tapering to a point at the bottom. The shoulder shall have a reinforced patch from the neck band to the armhole seam, 7 inches by 2 inches, minimum. A 3 inch piece of doubled, 3/4 inch precured fabric tape shall form a hanger and shall be sewed in the center insert of the neck band. The fullness at the collar shall be taken in by shirring.

* 3.5.14 Altar cloth. The altar cloth shall be made of unlined white precured fabric specified in 3.3.3. The finished size shall be a minimum of 15 inches by 36 inches and shall have 1 inch hems. The corners shall be mitered and a diagonal under seam shall be stitched to secure each mitered corner. The altar cloth shall be pressed and carefully folded.

* 3.5.15 Amice. The amice shall be made from white precured fabric specified in 3.3.3. The finished size shall be a minimum of 20 inches by 35 inches and shall have 1/2 inch hems. Centered along the top 35-inch length, a suitable 3/8 inch Greek Cross shall be embroidered in color-fast, red thread, at least 2 inches from the hem. The cross shall be located on the front of the amice. At each end of the front, 2 yards of precured fabric tape, 1/4 inch wide shall be attached.

3.5.16 Carrying case. The carrying case shall consist of an outer case, and an inner tray.

* 3.5.16.1 Outer case. The outer case shall conform to Drawings 14-1-121 thru 14-1-125. Stitching shall be as specified in 3.1, except there shall be 6 to 8 stitches per inch. Thread shall be as specified on the drawings. The outer case shall be provided with three labels conforming to type II, class 9, of DDD-L-20. Two labels shall be approximately 7 inches by 5-1/2 inches containing information specified on figures 1 and 2 (for Catholic Kits) and specified on figures 1 and 3 (for Protestant Kits). The third label shall be approximately 5 inches by 5 inches containing information specified on figure 4. Character size shall be a minimum of 10 point for all labels.

3.5.16.2 Inner tray. The inner tray shall be fabricated of the plastic specified in 3.3.7 and shall conform to Drawing 14-1-126. The nest shall be molded of the foam specified in 3.3.8 and shall conform to Drawing 14-1-127.

* 3.5.17 Corporal. The corporal shall be a minimum of 16 inches by 16 inches, made from white precured fabric specified in 3.3.3, and shall have 1/2 inch hems. A 3/8 inch Greek Cross shall be embroidered with color-fast red thread on the center line of one 16 inch dimension, 5 inches plus or minus 1 inch from the edge. The corporal shall be pressed and folded in three, beginning from the front edge to the back edge and folded again from side to side, forming nine squares.

3.5.18 Cincture. The cincture shall be a white cotton cord, 1/4 inch thick with a flat tassel at each end. The minimum overall length shall be 152 inches. The flat tassel at each end shall be 8 inches long with 3 inch length of crochet work at the upper end.

* 3.5.19 Finger towel. The finger towel shall be a minimum of 15 inches by 7 inches, made from white precured fabric specified in 3.3.3. The towel shall have 1/4 inch hems.

* 3.5.20 Pall. The pall shall be a minimum of 5 inches by 5 inches (finished size), made from white precured fabric specified in 3.3.3. The pall shall be sewn on two sides to form an envelope and shall have a 1/4 inch hem at the open end. Centered on the pall shall be a 3/8 inch Greek Cross, embroidered in color-fast, red thread. A plastic liner (the size of the cloth) with rounded corners shall be inserted in the open end.

* 3.5.21 Purificator. The purificator shall be a minimum of 15 inches by 10 inches (finished size), made from white precured fabric specified in 3.3.3. The purificator shall have 1/4 inch hems. Centered in the cloth shall be a 3/8 inch Greek Cross embroidered in color fast, red thread. The purificator shall be pressed and folded into three, beginning from the front edge to the back edge, and folded again from side to side.

3.5.22 Scarf. The scarf shall be a minimum of 9 feet long by a minimum of 6 inches wide, made of fast-color black bengaline cloth having a minimum thread count of 140 in the warp and 36 in the filling. The scarf shall have pinked ends and smooth even pleats at the neck, shaped to fit snugly over the shoulders and to hang evenly. A 4-inch gold Latin Cross shall be embroidered on each end.

* 3.5.23 Vestment set. The vestment set shall be reversible and shall consist of a chasuble, stole, and veil. Each vestment shall be white on one side and purple, matching the standard shade sample (see 6.4) on the other. The chasuble, stole, and veil shall be fabricated from the nylon specified in 3.3.4. Nylon thread, specified in 3.3.5 shall be used in sewing the vestment set. Embroidery shall be done by machine, on both sides of the vestments using color fast gold, rayon thread, matching the standard shade sample (see 6.4). The embroidered designs shall be similar to those shown in figure 4, as applicable.

3.5.23.1 Chasuble. The chasuble shall be a minimum of 39 inches long and 24 inches wide with an irregular pattern. The chasuble shall be provided with fastener tapes conforming to MIL-F-21840. The width shall be 5/6 inch and the cut length shall be 6 inches. The color shall be black. One pile tape shall be sewn on the right and another pile tape shall be sewn on the left of the back of the chasuble and shall be not less than 16-1/4 inches nor more than 16-3/4 inches, measured along the center fold, from the bottom of the chasuble. The hook tapes shall be sewn to the front of the chasuble so as to engage the pile tape when the chasuble is being worn.

3.5.23.2 Stole. The stole shall be a minimum of 78 inches long, joined at the center, tapering from a minimum of 5 inches wide at the end to a minimum of 2 inches wide at the center seam.

3.5.23.3 Veil. The veil shall be a minimum of 18 inches by 17 inches.

* 3.6 Seams and stitching. Unless otherwise specified herein, seams shall by type SSc-1 and stitching shall conform to type 301 of FED-STD-751, 10 to 14 stitches per inch. Thread breaks in stitching shall be overstitched not less than 1 inch at each break. Stitching shall be backtacked not less than 1/2 inch at the ends, except where the ends of stitching are caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tension shall be maintained so that there shall be no loose or tight stitching. All thread ends shall be trimmed. Seam allowance shall be maintained with seams properly sewed so that no runoffs, twists, pleats, puckers, raw edges, or open seams shall result. Unless otherwise specified herein, the tolerance for all hems shall be plus or minus 1/8 inch.

3.7 Finish.

* 3.7.1 Gold plate. The components specified in 3.5.1, 3.5.5 (cup and insert), 3.5.6, 3.5.7 and 3.5.8 (corpus) shall be pleated with 24 carat gold to a minimum thickness of 0.0005 inch. The plated finish shall be a satin finish except when a highly polished finish is specified on the drawings. Satin finish surfaces, except the inside of the chalice insert, shall be coated with clear organic coating in accordance with the manufacturer's commercial proctice. There shall be no visual evidence of chemical reaction such as evolution of gases when tested as specified in 4.5.1.

3.7.2 Anodic coating. The aluminum components specified in 3.5.4, 3.5.5 (base), 3.5.8 (cross and base), and 3.5.12 shall be given a satin finish and shall be anodized a gold color, approximating the color of the gold plated components specified in 3.7.1, in accordance with type II of MIL-A-8625.

3.8 Workmanship. Metallic and plastic components shall be free from sharp edges, burrs and slivers. Plating and finishes, where required, shall be free from areas of no coverage. Soldered joints shall be sound, and where exposed on the outside surface, shall be smoothly blended with surrounding area. Fabric components shall be clean, free from wrinkles and loose threads.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required, it shall be examined for defects in table II, specified dimensions, and tested as specified in 4.5.1. Any visual defect, any dimension not meeting specified requirements or failure to pass the test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with provisions in MIL-STD-105, except as otherwise indicated hereinafter.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 Intermediate testing. Prior to application of organic finish (where required) to gold plated surfaces, components shall be tested as specified in 4.5.1 to determine compliance with 3.8.1. The lot shall be expressed in units of groups of gold plated components submitted for inspection at one time. The sample unit shall be one group of gold plated components. The inspection level shall be S-1. Failure of one or more samples shall be cause for rejection of the lot.

4.4.3 End item inspection. A lot shall consist of all kits of one type offered for inspection at one time. The sample unit for this inspection shall be one complete kit.

4.4.3.1 Visual examination. Examination shall be made of the kits for defects set forth in table II. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II. Visual examination of defects

Examine	Defect	Classification Major	Classification Minor
Cloth components (fabric)	Holes, cuts, tears, any smash, weak place, broken or missing yarns; multiple floats or open place, clearly visible	X	
	Shade bar, fine or coarse filling bar		X
Seams and stitching			
Open seams	Up to 1/4 inch		X
	More than 1/4 inch	X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double-stitched seams, a seam shall be classified as open when either is open.		
End of continuous line of stitching	Less than 1/2 inch		X
Raw edge	Any raw edge		X
	NOTE: Raw edges not securely caught in stitching shall be classified as open seams.		
Seam and stitch type	Wrong seam or stitch type (where specified)	X	
Stitch tension	Loose, resulting in a loosely exposed needle or bobbin thread; tight, resulting in excessive puckering, twisting or pleating of fabric on seams		X

TABLE II. Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Stitches per inch	One stitch less than minimum specified		X
	Two or more stitches less than minimum specified	X	
	One stitch more than maximum specified		X
	Two or more stitches in excess of maximum specified	X	
	NOTE: To be scored when the condition exists on major portion of seam or stitching.		
Stitching ends	Back tacked less than 1/2 inch (except where ends are held down by other seams or stitching)		X
Thread breaks	Overstitched less than 1 inch		X
	Broken ends of stitching not caught in overstitching		X
	NOTE: Thread breaks not overstitched shall be classified as an open seam.		
Workmanship	Mends or darns	X	
	Thread not good match with material		X
	Needle chews	X	
	Seams or hems twisted or pleated		X
	Not folded (when specified)		X
Cleanness	Any spot or stains; thread ends not trimmed throughout		X
Assembly	Component missing or damaged	X	
	Not as specified		X
Chasuble tape	Pile and hook tapes cannot be engaged when chasuble is worn	X	
Label	Does not conform to specified figure; missing	X	

TABLE II. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Embroidery	Missing or not as specified	X	
Plastic components	Evidence of odor		X
Host tube	Cap missing or incorrect size - not seamless	X	
Plastic bottle	Not size specified		X
Metal components			
Patens	Scribed Cross penetrates to top		X
Ciborium	Top not slide fit	X	
Cross assembly	Not pebble grain finish with raised letters		X
Anodic coating	Not color specified	X	
Finish	Not finish specified	X	
	Not highly polished (where required)	X	
	Not uniform or is dirty, stained, discolored, scratched, abraded, peeling, or any foreign matter imbedded in plating	X	
Construction and	Any malformation	X	
	Rough or sharp edges or burrs	X	
	Loose parts		X
	Soldering incomplete or missing	X	
	Solder not flush or outside surfaces	X	
Missal (type I kit only)	Missing or not as specified	X	

4.4.3.2 Dimensional examination. Examiantion shall be made of the kit for defects in overall dimensions. Any dimension not within specification requirements shall be classified as a defect. The inspection level shall be S-3 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.4.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

TABLE III. Examination of preparation for delivery.

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Workmanship	Components improperly secured.

4.4.5 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing and reinforcing shall be made in accordance with the appendix of that specification.

4.5 Test.

4.5.1 Gold plating test. Place several drops of solution containing 50 percent by volume of chemically pure nitric acid (specific gravity 1.42) and an equal quantity of distilled water at 65 degrees Fahrenheit (F) plus or minus 2 degrees F. on the gold plated surface to be tested, for two (2) minutes, to determine compliance with 3.7.1. Tests shall be conducted prior to application of clear organic finish.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Prepackaging. The components of each kit shall be placed in the appropriate compartment within the carrying case as shown on Drawing 14-1-121. Tissue paper or other cushioning material shall be placed around the bell to prevent its contacting the chalice. The cloth items shall be neatly folded and stacked with the Bible stand placed in the middle of the stack, and placed at the top of the carrying case. The case shall be closed with means provided.

5.1.1.2 Packaging. Each kit, prepackaged as specified in 5.1.1.1, shall be packed in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.1.2 Level C. Kits shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Eight kits, of one type only, packaged as specified in 5.1, shall be packed two in length, two in width and two in depth in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing shall be in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Eight kits, of one type only, packaged as specified in 5.1, shall be packed two in length, two in width, and two in depth in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C. Kits, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior boxes and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The Chaplain's Kits covered by this specification are intended to meet minimum requirements for religious services under field and combat conditions. The type I kit is intended for use by Catholic Chaplains. The type II kit is intended for use by Protestant Chaplains.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Type kit required (see 1.2).
(c) When a first article is required (see 3.1, 4.3 and 6.5).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant fiberboard is required for level B pack (see 5.2.2.1).

* 6.3 Standard shade samples. The standard shade sample for nylon cloth, US Army Purple, Cable No. 65009 and rayon yarn, Old Gold, Cable No. 65021, for embroidery specified in 3.5.23 is available from the Color Association of the United States, Inc., 200 Madison Avenue, New York, NY 10016.

* 6.4 Approval of missal. The contracting officer should provide for approval of the missal specified in 3.5.9 by the Armed Forces Chaplain's Board, Washington, DC 20301.

* 6.5 First article. The first article shall be inspected and approved under the provisions of ASPR 7-104.55, pertaining to Government inspections The first article should be a preproduction sample and consist of a complete unit. The contracting officer should make arrangements for inspection and approval of the first article with the Construction, Material and Supplies Advisory Group, Armed Forces Chaplain's Board, Washington, DC 20301 and the US Army Natick Laboratories(GL), Natick, MA 01760.

* 6.6 Host box. The following item has been found to meet the requirements of 3.5.11.
Bradley Industries, Division of Richardson Merrel, Inc., 11040 King Street, Franklin, IL, Item number 32 or equal.

* 6.7 Revision changes. The margins of this specification have been marked with an asterisk (*) to indicate where changes or additons from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - PE

Review activities:

DSA-GS
Armed Forces Chaplain Board

Preparing activity:

Army - GL

Project No. 9925-0221

BAGGAGE ALLOWANCE REFERENCES

AR 220-10

1. Par 42a(4) and 42c(1)(a)6: "In additon to the above items, a demoninational field or flight kit will be permitted in the staterooms of chaplains."

2. Par 43a: "Personal baggage markings. First name, middle initial, last name, full service number, rank and movement code."

3. Par 40a: "not less than 3/4" and not more than 3" in height."

4. Par 41c: "Packages containing TAT equipment will be marked immediately following the movement code with the letters "TAT" encircled in red."

5. Par 41d: "containers which must be accessible to troops at all times during movement will be additionally marked with a 3-inch yellow disk placed near (beside or below) the movement code on two surfaces of the container. TAT marked with the yellow disk will accompany the troops on the same carriers (air or surface) throughout the movement and be stowed so as to be readily accessible at all times."

FIGURE 1 - BAGGAGE ALLOWANCE REFERENCES

CHECK LIST

CHAPLAIN KIT, COMBAT, CATHOLIC

Chalice
Chalice, Paten
Communion Paten
Ciborium
Crucifix
Candle Holders (2) w/candles
Flame Protectors (2)
Bottles (2) (1 filled w/water*, 1 w/wine*)
Bell
Host Box and Host Tube
*Host Wafers, Large and Small
Missal Stand
Missal
Vestment Set
  Chasuble, Stole, Veil
Albs (2)
Altar Cloths (3)
Purificatior (3)
Finger Towels (3)
Corporals (3)
Amices (2)
Palls (2)
Cincture

*Oil Stock
*Small Pyx
*Stole, purple and white
*Ritual
*Manual of Prayers
*Vademecum

*To be furnished by individual Chaplain

NOTE: The Cup Portion of the Chalice, Chalice Paten, Communion Paten, Ciborium, Crucifix Corpus, and Bell are brass, gold plated. USE MILD POLISH ONLY. All other metal components are anodized aluminum. DO NOT POLISH, TO CLEAN - WASH IN MILD SOAP AND WATER.

FIGURE 2 - CHECK LIST FOR TYPE I KIT

CHECK LIST

CHAPLAIN KIT, COMBAT, PROTESTANT

Chalice
Chalice Insert
Chalice, Paten
Communion Paten
Ciborium
Cross
Candle Holders (2) w/candles
Flame Protectors (2)
Bottles (2)
Host Box and Host Tube
*Host Wafers, Large and Small
Bible Stand
*Bible or Prayer Book
Chaplains Scarf
Altar Cloths (3)
Purificators (3)
Corporals (3)
Palls (2)

*To be furnished by individual Chaplain.

NOTE: The Cup Portion of the Chalice, Chalice Insert, Chalice Paten, Communion Paten and Ciborium are brass, gold plated. USE MILD POLISH ONLY. All other metal components are anodized aluminum. DO NOT POLISH. TO CLEAN - WASH IN MILD SOAP AND WATER.

FIGURE 3 - CHECK LIST FOR TYPE II KIT

WASHING INSTRUCTIONS

FOR

PRECURED FABRIC ITEMS

(Alb, altar cloth, amice, corporal, finger towel, pall, purificator)

1. For Machine Washing. Use wash and wear or durable press cycle. Wash with moderately hot water (140°F) using soap or mild detergent.

2. For Hand Washing. Wash in moderately hot water as described above. DO NOT WRING OR TWIST.

3. DO NOT BLEACH OR STARCH.

4. Tumble dry at warm settings. Remove immediately after drying. Shape and hang.

5. If touch up is required, iron at low (synthetic) temperature.

6. May be cry cleaned.

FIGURE 4 - WASHING INSTRUCTIONS FOR PRECURED FABRIC ITEMS

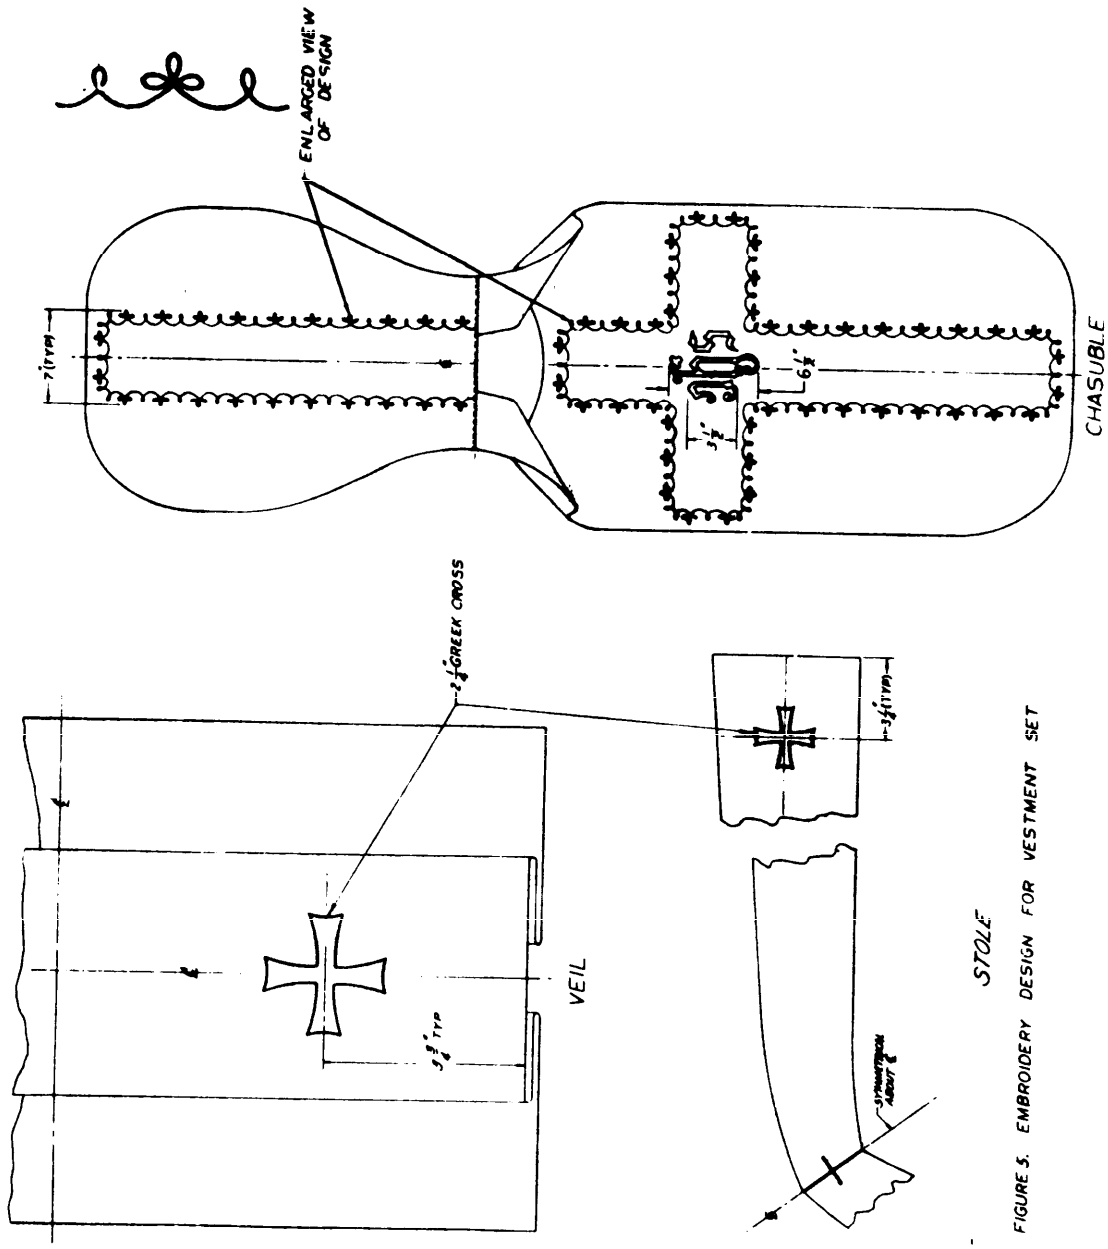


FIGURE 5. EMBROIDERY DESIGN FOR VESTMENT SET

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-C-43558A
CHAPLAIN'S KITS, CATHOLIC AND PROTESTANT, LIGHTWEIGHT, FOR ACTIVE COMBAT APPLICATION

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



STSNL-TD

Commander
US Army Natick Laboratories
ATTN: STSNL-TD
Natick, Massachusetts 01760

FOLD