MIL-C-43570A
13 June 1985
SUPERSEDING
MIL-C-43570(GL)
26 February 1968

MILITARY SPECIFICATION

COVERALLS, SAFETY, INDUSTRIAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the requirements for the manufacture of industrial coveralls.

1.2 Classification. The coveralls shall be of one type in the following sizes (see 6.2):

Schedule of Sizes

X-Small
Small
Medium
Large
X-Large
XX-Large

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research and Development Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole and Button Staple, (Plastic).
V-T-276	-	Thread, Cotton.
V-T-280	-	Thread, Gimp, Cotton Buttonhole.
UU-P-268	-	Paper, Kraft, Wrapping.
DDD-L-20	-	Label: For Clothing, Equipage and Tentage (General Use).
PPP-B-636	-	Boxes, Shipping Fiberboard.

MILITARY

MIL-C-10296	-	Cloth, Sateen, Cotton.

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams and Stitchings.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-1668	-	Provisions for Evaluating Quality of Cloth Coveralls.

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample in which case this document shall govern.

3.2 Materials. (see 6.4)

3.2.1 Basic material. The material for the coverall shall be cotton sateen cloth, bleached white, conforming to class 2 of MIL-C-10296. The colorfastness requirements shall not apply.

3.2.2 Thread. The cotton thread for seaming, stitching buttonholes and attaching buttons shall be type IA2, white, ticket Nos. 30 and 50, 3 ply conforming to V-T-276.

3.2.3 Gimp. The cotton gimp for reinforcing the buttonholes shall be white or natural, size No. 8 conforming to type I or II of V-T-280.

3.2.4 Labels. Each coverall shall have an identification label and a size label or a combination size and identification label conforming to DDD-L-20. Fastness to laundering requirements shall apply.

* 3.2.4.1 Identification label. The identification label shall conform to type VI, class 1.

* 3.2.4.2 Size label. The size label shall conform to type VI, class 2.

* 3.2.4.3 Combination label. The identification and size label may be combined into one label conforming to type VI, classes 1 and 2 combined.

3.2.5 Buttons. The buttons shall be type II, class D, style 26, 30-line, of V-B-871. The buttons shall be white and have a dull finish.

3.3 Design. The coveralls shall have a button and buttonhole fly type front closure, shirt style collar, long sleeves and a right hip pocket and left chest pocket, and two front patch pockets.

3.4 Patterns. Standard patterns which provide an allowance of 1/2 inch for double-lapped and double-stitched seams and 3/8 inch for all other seams will be furnished by the Government. The standard patterns shall not be altered in any

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

way and are to be used only as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.4.1 List of pattern parts. The components of the coverall shall be cut from the material specified in accordance with the pattern parts indicated.

Material	Pattern nomenclature	Cut parts
	Jacket parts	
Cotton sateen cloth	Back	1
	Front	2
	Collar	2
	Sleeve	2
	Front fly	1
	Chest patch pocket	1
	Trouser parts	
	Back	2
	Front	2
	Hip pocket	1
	Front patch pocket	2

3.5 Construction.

3.5.1 Stitches, seams and stitching. Stitch, seam and stitching types, as specified in table I, shall conform to FED-STD-751. When two or more methods of seams or stitches are given for the same operation, either one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the coveralls. The gage of stitching for double stitched seams shall be 3/16 to 5/16 inch unless otherwise specified herein with the first row of stitching 1/32 to 1/16 inch from turned edge.

3.5.1.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

* 3.5.1.2 Seam type. Seam type shall be as specified in table I with seam allowances maintained and seams properly sewn so that no raw edges, run-offs, twists, pleats, puckers or open seams shall result.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

* 3.5.1.3 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/4 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

* 3.5.1.3.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-out occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks, two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

* 3.5.1.4 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.5.1.3.1a and 3.5.1.3.1b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn.

* 3.5.1.5 Bartacking. Bartacking shall be 1/2 ± 1/16 inch long, 1/8 ± 1/32 inch wide and shall contain 28 stitches. Bartacks shall be free from thread breaks and loose stitching.

* 3.5.1.6 Automatic stitching. Automatic machines may be used to perform any of the stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three tying, overlapping or backstitches are used to secure the ends of stitching.

* 3.5.1.7 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

3.5.2 Buttonholes. The buttonholes shall be the eyelet end taper bar type worked over gimp with the ends of the buttonholes tacked, the purling finishing toward the outside of coveralls and the cut lengths shall be 3/4 to 7/8 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

3.6 Manufacturing operation requirements. The coveralls shall be manufactured in accordance with operations specified in table I. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching may be used providing the stitching is removed or is not visible on the finished coverall.

3.6.1 Figures. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall control.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut coveralls. a. Cut the coveralls in strict accordance with patterns furnished which show size, directional lines, shape and placement of pockets, fly and notches for proper assembly. b. Lay the fronts and backs of trousers so that the directional line is in the warp direction. The directional line may vary from the warp direction by not more than 2-1/2 inches on both fronts and backs. Measurement shall be taken from the top and bottom of the directional line on pattern to the selvage edge of the fabric and the difference between two measurements shall not exceed the tolerance specified. c. Cut all component parts of the coveralls from one piece of material except fly and undercollar which may be cut from ends. Parts cut from ends shall approximate the shade of the garment. d. The reinforcement strips for pocket facings shall be cut from the basic material in the warp direction to finish 7/16 to 1/2 inch in width and 9-1/2 ± 1/8 inches in length. The strips may be cut from ends and placed on rolls.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE I (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Replacement of damaged parts. a. Replace at time of cutting any part containing a damage such as a hole, smash or multiple float. b. Replace any part damaged during the manufacturing process by a needle chew, cut, tear, mend, burn, hole, or exposed drill hole.						
3.	Marking. a. Mark, ticket or bundle all component parts of the coverall except those parts cut from ends to insure correct size, proper assembly and a uniform shade throughout the coverall. b. Any method of marking may be used except: (1) Metal fastening devices. (2) Sew-on tickets. (3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets. c. The use of ink pad numbering machine, rubber stamp or pencil will be acceptable provided the numbers do not show through the outside of the coverall and the numbers are covered by the seam allowance.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Labels.						
	a. Sew labels on all four sides not more than 3/16 inch from edges to inside center of back (1 inch tolerance) as follows:						
	(1) Size label - The top edge caught in the stitching of the top collar to neck.	301	LSbj-1	10-14	30-3	30-3	
	(2) Identification label - The top edge may abut or be caught in the bottom line of stitching of size label.	301	LSbj-1	10-14	30-3	30-3	
	NOTE: When a combination size and identification label is used, the label shall be positioned as in (1) above.						
5.	Make collar.						
	Finished appearance. The points and edges of the collar shall be neatly and completely forced out and uniform in width. The plies shall be smooth and flat without distortion and with the edge stitching uniform in width.						
	Join top and undercollar plies along top and side edges. Turn collar, force out points and single stitch 3/16 to 1/4 inch from edge.	301 or 401 and 301	SSe-2(a)	10-14	30-3	30-3	
			SSe-2(a)	10-14	30-3	50-3	
			SSe-2(b)	10-14	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

Table I (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make pockets						
	a. Turn in top edges of chest and hip pockets 1/2 to 3/4 inch with raw edges turned in, and single stitch 1/16 to 3/32 inch from edge.	301	EFb-1	10-14	30-3	30-3	
	b. Position edges of reinforcement strips to fold line of front pocket (trouser) facings on the inside and single stitch 1/8 to 3/16 inch from fold mark. Turn in pocket facings with the raw edges turned under the reinforcement strips and single stitch 1/16 to 1/8 inch from edge through pocket.	301 and 301	LSbj-1	10-14 10-14	30-3 30-3	30-3 30-3	
	Note: All pockets may be creased on a creasing machine.						
7.	Make fly.						
	Fold fly in half lengthwise and single stitch ends. Turn, force out points, and raise stitch 3/16 to 1/4 inch from edge with the stitching continued along front folded edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b) and OSf-1	10-14 10-14 10-14	30-3 30-3 30-3	30-3 50-3 30-3	
8.	Set pockets.						
	Position hip, chest and front patch pockets to fronts and back respectively, as indicated by marks	301	LSd-2	10-14	30-3	30-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Set pockets. (cont'd)						
	on pattern, and double stitch. The top and back raw edges of front patch pockets may be stitched to seam allowance of trouser prior to joining of the outseams and waist seam.						
9.	Join shoulders.						
	Join shoulders with a double lapped and double stitched seam with the back lapping the fronts.	301 or 401	LSc-2 LSc-2	10-14 10-14	30-3 30-3	30-3 50-3	
10.	Set sleeves.						
	Finished appearance. The sleeves shall be carefully set without twists, pleats, puckers or raw edges. The gage of stitch shall be uniform.						
	Set sleeves to armhole with a double lapped and double stitched seam with the back and front parts lapping the sleeve.	301 or 401	LSc-2 LSc-2	10-14 10-14	30-3 30-3	30-3 50-3	
*11.	Join side and underarm seams.						
	Join the side and underarm seams in one continuous operation with a double lapped and double stitched seam. The seam may lap in either direction, and seams at base of armhole may be staggered 3/8 inch (center to center).	301 or 401	LSc-2 LSc-2	10-14 10-14	30-3 30-3	30-3 50-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*12.	Hem sleeves.						
	Turn in bottoms of sleeves with raw edges in and single stitch 1/16 to 3/32 inch from edge. The hems shall finish 1 ± 1/8 inches.	301	EFb-1	10-14	30-3	30-3	
13.	Join crotch seam.						
	a. Turn crotch seam of the right front to the outside and single stitch 1/16 to 1/8 inch from edge.	301	EFa-1	10-14	30-3	30-3	
	b. Turn edge of left front crotch seam to the inside and double stitch catching the right front crotch seam with both rows of stitching.	301	LSb-2	10-14	30-3	30-3	
14.	Join seat seam.						
	Join the seat seam with a double lapped and double stitched seam. The right back shall lap the left back.	301 or 401	LSc-2 LSc-2	10-14 10-14	30-3 30-3	30-3 50-3	
*15.	Join outseams						
	Join outseams with a double lapped and double stitched seam catching the back edge of the front patch pockets in the lines of stitching. The seam may lap in either direction.	301 or 401	LSc-2 LSc-2	10-14 10-14	30-3 30-3	30-3 50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Join inseams.						
	Join inseams in one continuous operation with a double lapped and double stitched seam. The fronts shall lap the backs and a 3/8 inch stagger at seat and crotch seams is permitted (measured from center to center).	301	LSc-2	10-14	30-3	30-3	
		or					
		401	LSc-2	10-14	30-3	50-3	
17.	Join trouser to jacket.						
	Join trouser to jacket with a double lapped and double stitched seam with the jacket lapping the trouser and the top edges of front patch pockets caught in the lines of stitching. Seams of side and outseams may be staggered 3/8 inch (center to center).	301	LSc-2	10-14	30-3	30-3	
		or					
		401	LSc-2	10-14	30-3	50-3	
18.	Make facings.						
	a. Turn up bottom edge of left facing 3/8 to 1/2 inch and single stitch 1/16 to 3/32 inch from edge.	301	EFa-1	10-14	30-3	30-3	
	b. Turn facings to outside, as indicated on pattern, and single stitch across lapel steps and bottom edge of right facing. Turn facings to inside, force out points and single stitch along lapel steps, fronts, and bottom edge of right facing 1/16 to 3/32 inch from edge.	301	SSe-2(a)	10-14	30-3	30-3	
		or					
		401	SSe-2(a)	10-14	30-3	50-3	
		and					
		301	SSe-2(b)	10-14	30-3	30-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE I (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Finish right front facing.						
	Turn in back raw edge and single stitch 1/16 to 3/32 inch from edge through front.	301	LSd-1	10-14	30-3	30-3	
20.	Attach fly.						
	a. Position fly to left front in accordance with marks on pattern. Turn in back raw edges of front and fly and single stitch 1/16 to 3/32 inch from edge through front.	301		10-14	30-3	30-3	
	-or-						
	b. The raw edges of fly and left front may be stitched together, as indicated on pattern, prior to the forming of the left front facing.	301	SSa-1	10-14	30-3	30-3	
21.	Finish front opening.						
	Finished appearance. The fly shall finish smooth and flat without twists, gathers, puckers, pleats or raw edge. The left and right front shall be equal length.						
	Box stitch base of front opening with the bottom line of stitching superimposed on the stitching at bottom ends of facings. The box stitching shall measure 2-1/2 to 2-3/4 inches in length and 3/8 to 1/2 inch in width.	301		10-14	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
22.	Attach collar.						
	Finished appearance. The collar shall be uniform in appearance and placement with edges smooth and flat.						
	Stitch undercollar along neck edge. Turn collar to inside and with the raw edge of top collar turned in, single stitch 1/16 to 1/8 inch from edge the full length, catching the size label in the stitching of top collar.	301 and 301	SSa-1 LSb-1	10-14 10-14	30-3 30-3	30-3 30-3	
23.	Hem bottoms.						
	Turn in leg bottoms with raw edges turned in and single stitch 1/16 to 3/32 inch from edge. The hem shall finish 1 ± 1/8 inches.	301	EFb-1	10-14	30-3	30-3	
24.	Buttonholes.						
	a. Make 4 horizontal buttonholes in fly, as indicated on pattern, with the nearest inside edge of buttonhole 5/8 ± 1/8 inch from finished front edge.	Buttonhole		56-62 per buttonhole including tack(s)	30-3	30-3	
	b. Make 1 horizontal buttonhole at neck through front and fly with the nearest inside edge of buttonhole 5/8 ± 1/8 inch from finished front edge and 1-1/4 to 1-3/8 inches from lapel step.	Buttonhole		56-62 per buttonhole including tack(s)	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
25.	Buttons.						
	Sew 5 buttons to right front to correspond with the 5 buttonholes. The top button shall be positioned so that the ends of collar at neck edge are 1/4 to 3/8 inch apart when buttoned.	301 or 101		14-16 per button 20-24 per button	30-3 30-3	30-3	
26.	Bartacks.						
	a. Place a vertical bartack at each end of chest and hip pocket openings superimposed on the inside line of stitching.	Bartack		28 per bartack	30-3	30-3	
	b. Bartack bottom ends of front patch pocket openings with the bartacks positioned at right angles to pocket openings and extending into the outseams.	Bartack		28 per bartack	30-3	30-3	
	c. Place 4 vertical bartacks through front and fly centered (1/4 inch tolerance) between buttonholes 3/8 to 1/2 inch from front edge.	Bartack		28 per bartack	30-3	30-3	
	d. Bartack the base of front opening with 2 horizontal bartacks (one each end) in line with top row of box stitching.	Bartack		28 per bartack	30-3	30-3	
27.	Clean coveralls.						
	a. Trim all thread ends and remove loose threads.						
	b. Remove all spots, stains, shade and size markings.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

3.7 Measurements. The finished coveralls shall conform to measurements as shown in table II.

TABLE II. Table of measurements (inches)

Size	X-Small	Small	Medium	Large	X-Large	XX-Large	Tolerance
1/2 chest 1/	20-1/2	22-1/2	24-1/2	26-1/2	28-1/2	30-1/2	± 1/2
1/2 Waist 2/	17	19	21	23	25	27	± 1/2
Sleeve inseams 3/	23	23	23	23	23	23	± 1/2
Leg inseam 4/	32	32	32	32	32	32	± 1/2
Overall length 5/	64-1/2	65-1/2	66-1/2	67-1/2	68-1/2	69-1/2	± 1/2

1/ The coverall shall be buttoned smooth and flat and measured across the front from base of armhole to base of armhole.

2/ The coverall shall be buttoned smooth and flat and measured across waist from side seam to side seam.

3/ The sleeve inseam shall be measured from the base of armhole along inseam to bottom of sleeve hem.

4/ The leg inseam shall be measured from crotch seam along inseam to bottom of leg hem.

5/ Measure from base of neck along center back to bottom of leg.

3.8 Workmanship. The finished coveralls shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase documents.

4.2.2 Point count inspection. Sampling and inspection provisions for end item examination, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1668.

* 4.2.3 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect, illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each pair of buttoned coveralls shall be folded to approximate 17 by 13 inches in such a manner that the size label is clearly visible to permit ready identification. Ten folded coveralls of one size only shall be neatly stacked in a bundle and cross-tied with cotton tape or twine.

5.1.2 Commercial. Coveralls shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Twenty coveralls of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, two in length, one in width, and one in depth within a shipping container. Inside dimensions of each container shall approximate 26-1/4 inches in length, 17-1/4 inches in width and 14 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed, in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.2. Toward the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B packing. Twenty coveralls of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat two in length, one in width and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 26-1/4 inches in length, 17-1/4 inches in width, and 14 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B, of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.2.2. Toward the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification except that the inspection shall be in accordance with 4.2.2.

5.2.3 Commercial packing. Coveralls, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), coveralls packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type IA of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or film bonding means O or P. Pallet pattern number ninety shall be used as found in the appendix of MIL-STD-147.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Labels, mixed sizes. Each shipping container or palletized unit loads, packed with mixed sizes, only, shall have securely attached to the end and side, directly under the printing or stencilling, a white paper label 5-by 4-inches with the words "MIXED NSN's" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The coveralls are intended for wear by civilian and military personnel of the Department of the Army.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Size(s) required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
e. When palletization is required (see 5.3).

6.3 Sample. For access to the sample, address the contracting office issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.5 Changes from previous issue. The margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activity:

Navy - MC

Preparing activity:

Army - GL

Project No. 8415-0443

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

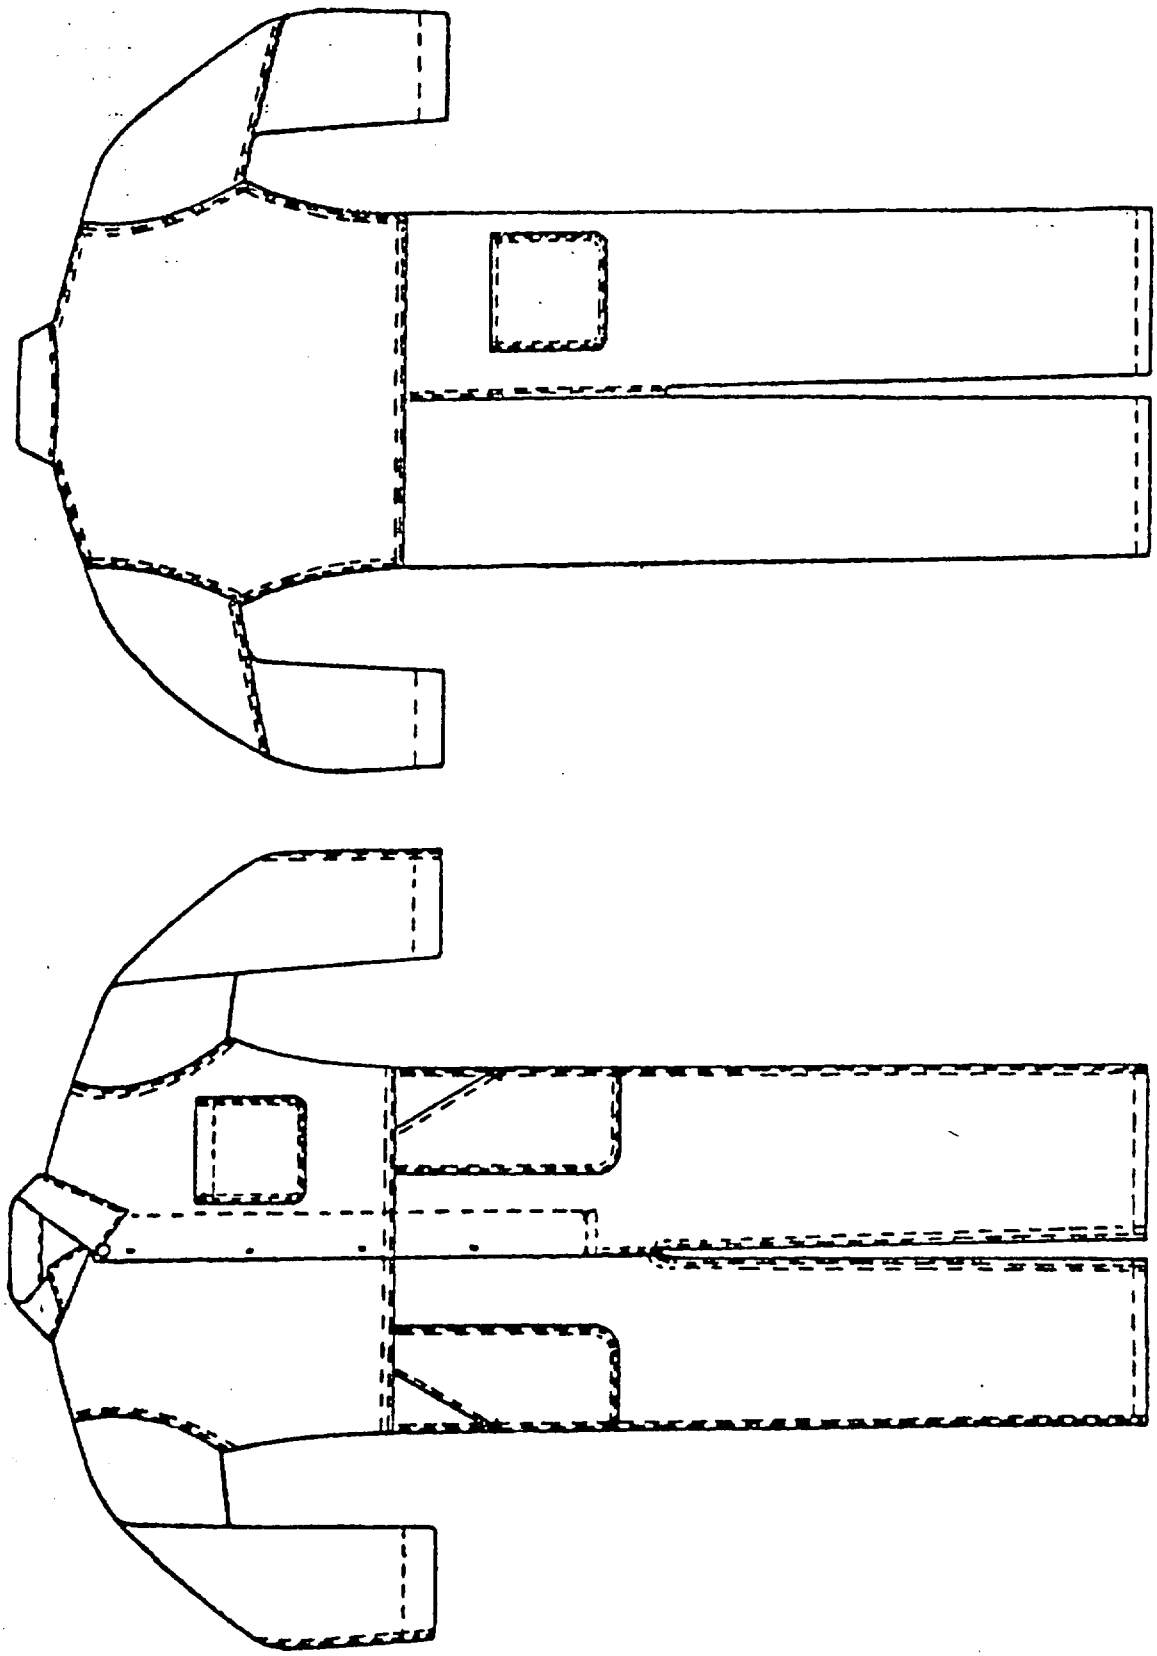


FIGURE 1 COVERALLS, SAFETY INDUSTRIAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
Army Natick Research and Development Center
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Center
ATTN: STRNC-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-43570A	Coveralls, Safety, Industrial

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION (Mark one)
	☐ VENDOR
b. ADDRESS (Street, City, State, ZIP Code)	☐ USER
	☐ MANUFACTURER
	☐ OTHER (Specify): _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER (Last, First, MI) – Optional	b. WORK TELEPHONE NUMBER (Include Area Code) – Optional
c. MAILING ADDRESS (Street, City, State, ZIP Code) – Optional	8. DATE OF SUBMISSION (YYMMDD)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:44Z
Check the source to verify that this is the current version before use.