INCH-POUND

MIL-C-43549C
23 June 1989
SUPERSEDING
MIL-C-43549B
21 January 1983

MILITARY SPECIFICATION

CAP, COLD WEATHER, INSULATING, HELMET LINER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a fully lined cap cold weather, insulating helmet liner, with adjustable forehead flap.

1.2 Classification. The cap shall be of the following classes and sizes as specified (see 6.2).

Class 1 - Olive Green 107
Class 2 - Woodland Camouflage Pattern

Schedule of sizes

6-1/2 6-3/4 7 7-1/4 7-1/2 7-3/4

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-203	- Paper, Kraft, Untreated
V-T-280	- Thread, Gimp, Cotton, Buttonhole
JJ-W-155	- Webbing, Textile, (Cotton, Elastic)
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-T-3530	- Thread and Twine; Mildew Resistant or Water Repellent Treated
MIL-C-3924	- Cloth, Oxford, Cotton Warp and Nylon Filling, Quarpel Treated
MIL-W-5664	- Webbing, Textile, Elastic
MIL-C-17155	- Cloth, Knitted, Nylon, Fleece
MIL-F-21840	- Fastener Tapes, Hook and Loop, Synthetic
MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-C-43234	- Cloth, Plain Weave, Acrylic
MIL-C-43247	- Cloth, Knitted, Nylon, Tubular, Stretch Type
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card of America

(Standard shades may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If standard shades are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

3.3.1 Basic material. The basic material for the outer shell (crown, earlap, forehead flap, and binding) shall be in accordance with 3.3.1.1 and 3.3.1.2.

3.3.1.1 Class 1 cap. Basic material for the class 1 cap shall be cotton warp and nylon filling oxford cloth, Olive Green 107, conforming to class 2 of MIL-C-3924. The cloth for the sweatband may be dyed seconds of the class 2, Olive Green 107 dyed cloth of MIL-C-3924. Dyed seconds shall be cloth which has been rejected only for defects cited in MIL-C-3924 pertaining to shade, and the shade shall approximate Olive Green 107.

3.3.1.2 Class 2 cap. Basic material for the class 2 cap shall be cotton warp and nylon filling oxford cloth, conforming to class 3 of MIL-C-3924. The cloth for the sweatband shall be either class 3 or class 2 dyed Olive Green 107 material of MIL-C-3924. As an alternative, the cloth may be printed seconds, or dyed the ground shade prior to printing of class 3 material of MIL-C-3924, or dyed seconds of class 2 material of MIL-C-3924. Printing seconds shall be cloth which has been rejected only for defects cited in MIL-C-3924 pertaining to shade, infrared reflectance, or pattern of camouflage print. Dyed seconds shall be cloth which has been rejected only for defects cited in MIL-C-3924 pertaining to shade, and the shade shall approximate Olive Green 107.

3.3.2 Lining for crown. The material for lining the crown shall be plain weave acrylic cloth conforming to MIL-C-43234.

3.3.3 Lining for earlap and forehead flap. The material for lining the earlap and forehead flap shall be knitted nylon fleece cloth conforming to type I of MIL-C-17155 except that the color shall be Olive Green 106. There shall be a minimum of 24 wales per inch, and the minimum colorfastness to laundering (after 3 cycles) shall be "fair."

3.3.4 Gusset material. The material for the gusset shall be nylon knitted stretch type cloth, Olive Green 106, conforming to class 2 of MIL-C-43247.

3.3.5 Back adjustment strap. The strap for outside back of earlap shall be cotton elastic webbing, 1 inch wide, Olive Drab 7, conforming to type I, class 7 of JJ-W-155, or class 1 of MIL-W-5664.

3.3.6 Earlap fasteners. The material for the adjustable closure system shall be nylon fastener tape, 1-1/2 inch wide loop tape and 1-1/2 inch hook tape, conforming to type II of MIL-F-21840. The color shall be Olive Green 106.

3.3.7 Thread, polyester core. The thread for stitching shall be cotton-covered or polyester-covered polyester thread conforming to MIL-T-43548. The thread size shall be Ticket Nos. 50-2 and 70-2. The thread shall be dyed B-1, C.A. 66022 and water repellent treated in accordance with type II, classes 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

and 3 respectively of MIL-T-3530. Lubrication of the quarpel treated thread by any means in the end item fabricators plant prior to or during sewing is prohibited.

3.3.8 Gimp. The gimp for reinforcing the buttonholes shall conform to type I or II, size No. 8, conforming to V-T-280. The gimp shall be dyed S-1, C.A. 66022.

3.3.9 Labels. Each cap shall have a combination identification-size label and an instruction label conforming to DDD-L-20. Label color shall be Medium Green Cable No. 70034, 70130, or 70131 and shall show fastness to laundering in accordance with DDD-L-20 requirements.

3.3.9.1 Identification-size label. The identification-size label shall conform to type VI, class 4.

3.3.9.2 Instruction label. The instruction label shall conform to type VI, class 3, and shall contain the following information:

CAP, COLD WEATHER, INSULATING, HELMET LINER

1. Wear straight on head with forehead flap up or down.
2. Fasten earlaps under or over chin, at back of neck, or over head.
3. When worn under helmet with earlaps over helmet, thread helmet chin strap through buttonholes.
4. Launder by the Wool Method, Formula II, FM 10-16 except dry tumble heat shall not exceed 130°F; or hand wash in lukewarm water.

DO NOT REMOVE THIS LABEL

3.4 Design. The cap is a fully lined cold weather head covering having a turndown forehead flap (sinus protector), three-piece crown, a stretch gusset with an elastic strap at center back and earlaps with nylon fastener hook and pile tape overlap closure (see figure 1).

3.5 Patterns. Standard patterns, which provide a 3/16 inch seam allowance for joining forehead flap to flap lining and 3/8 inch for all other seams, will be furnished by the Government. The Government patterns, which show directional lines and markings for proper assembly, shall not be altered in any way and are to be used as a guide for cutting contractor's working patterns. The working patterns shall be identical to the Government patterns except that additional notching to facilitate manufacture is permissible.

3.5.1 Pattern parts. The pattern parts and applicable material for cutting the cap parts shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Cotton warp and nylon filling oxford cloth	Top crown	1
	Side crown	2
	Earlap	2
	Forehead flap	1
	Sweatband 1/	1
Acrylic cloth	Top crown lining	1
	Side crown lining	2
Nylon fleece knitted cloth	Earlap lining	2
	Forehead flap lining	1
Nylon stretch type knitted cloth	Gusset	2
Nylon fastener tape	Loop tape (inside left earlap - upper portion)	1
	Loop tape (inside left earlap - lower portion)	1
	Hook tape (outside right earlap - upper portion)	1
	Hook tape (outside right earlap - lower portion)	1

1/ When the sweatband material is strip cut and put on rolls, disregard this pattern piece.

3.6 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the document appear in figure 1, the document shall govern.

3.6.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used. Where stitch type 401 is used, the chain or underside of the stitch shall be on the inside of the cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

3.6.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/4 inch, except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.6.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during sewing, except prestitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Except for prestitching, thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be reported by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.6.1.2 Type 401, 504, and 505 stitching. Thread tension shall be maintained so that there will be no loose or excessively tight stitching. All repairs shall be in accordance with 3.6.1.1.1a and b. Type 301 stitching may be used to repair type 401 stitching.

3.6.2 Buttonhole. The buttonholes shall be eyelet end, taper bar type, worked over gimp (see 3.3.8) with not less than four tacking stitches at bar end (not counting crossover stitch). The purling shall be on the outside. The finished cut lengths shall be 1 to 1-1/8 inches. The buttonholes shall be clean cut with the stitching securely caught in the fabric. Additive treatments or materials used to secure the ends of the stitching or to stiffen the fabric, prior to stitching the buttonholes are prohibited.

3.6.3 Bartacking. Bartacking shall be 1/2 ± 1/16 inch long, 1/8 ± 1/32 inch wide and shall contain a minimum of 28 stitches. Bartacks shall be free from thread breaks and loose stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

3.6.3.1 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements of the stitch pattern, stitches per inch, and size and type of thread are met, and at least three tying, overlapping, or back stitches are used to secure the ends of the stitching.

3.6.3.1.1 Thread ends. All thread ends that are visible on the finished item shall be trimmed to a length of not more than 1/4 inch.

3.6.4 Repairs. Repairs such as mends, darns, patches, or splices are not permitted on the cap.

3.7 Manufacturing operations requirements. The cap shall be manufactured in accordance with operations requirements specified in table II. Unless otherwise specified in table II, the contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching to facilitate manufacture is permissible provided the thread is removed or does not show on the finished cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the material in strict accordance with patterns furnished which show size, shape, warp or filling directional lines, and notches for proper assembly. The side crown pieces and the side crown lining pieces may be cut in either the warp or filling direction. The napped side of the crown lining pieces shall face the outer shell in the finished cap. b. Cut the basic material parts from the same piece of material except the forehead flap and binding, which may be cut from ends. Parts cut from ends shall be shade matched. Cut the lining for forehead flap and earlaps from the same piece of material. c. Cut binding for earlap from the basic material, on the bias and sufficiently wide to finish as specified in operation 9. The sweatband material may be strip cut (on the bias) to the proper width and placed on rolls. It may be pieced with no more than one joining seam in the finished cap. When applicable, the joining seam shall be stitched 5/16 to 1/2 inch, using stitch type 301 or 401 and seam type SSa-1. d. Cut the gusset pieces so that wales run the length of the gusset (vertically). (The wales of the knitted fabric are equivalent to warp yarns of a woven fabric.) e. Cut the forehead lining (fleece) in either the warp or filling direction.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) f. Cut the 1-inch wide elastic webbing for the back adjustment strap (one each) of sufficient length to finish 2 to 2-1/4 inches when attached to cap (see operation 14). g. Cut the nylon fastener tapes by patterns.						
2.	Replacement of damaged parts. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.4.3 shall be removed from production and replaced with non-defective and properly matched components.						
3.	Component marking. a. Mark, ticket or bundle all parts, to ensure a uniform shade, size, and proper assembly throughout the cap. b. Any method of marking may be used except: 1. Corrosive metal fastening devices. 2. Sew-on tickets. 3. Adhesive tickets which leave an impression or traces of paper or adhesive on the material after removal of the ticket.						
4.	Make forehead flap. Finished appearance. The forehead flap shall be smooth and free of wrinkles and puckers. Raised stitching shall be neat and evenly gaged.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make forehead flap. (cont'd)						
	a. Superimpose the forehead flap and flap lining, face to face, and stitch the plies together along the curved edge; turn; force out edge and raise stitch 1/8 to 1/4 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	50-2 50-2 50-2	50-2 70-2 50-2	
	b. Overedge the bottom raw edges together. The gage shall be 3/16 to 1/4 inch wide, and a 1/2 to 1 inch chain shall be left at each end.	504 or 505	SSa-1 SSa-1	10-14 10-14	70-2 70-2	70-2 70-2	
5.	Make outer shell.						
	Finished appearance. The outer shell shall be neatly joined without twists, puckers, or pleats and with joining seams matching. Darts shall be equal in length ± 1/8 inch on each side, and crown shall be shaped. Raised stitching shall be neat and evenly gaged.						
	a. Stitch the cutout darts of the side crown pieces and earlaps, tapering to nothing 1/2 to 5/8 inch beyond the end of cutout.	301	SSa-1	10-14	50-2	50-2	
	b. Stitch the folded darts on the earlaps tapering to nothing 1/2 to 5/8 inch beyond end of dart.	301	OSf-1	10-14	50-2	50-2	
	c. Seam side crowns to earlaps leaving the seam open at the front ends 1/2 to 1 inch to allow for binding.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-2 50-2	50-2 70-2	
	d. Stitch top crown to outer gusset; turn seam toward crown and raise stitch 1/8 to 3/16 inch from folded edge.	301 or 401 and 301	LSq-2(a) LSq-2(a) LSq-2(b)	10-14 10-14 10-14	50-2 50-2 50-2	50-2 70-2 50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make outer shell. (cont'd)						
	e. Stitch top crown, with gusset attached, to side crowns and back edges of earlaps.	301 or 401	LSq-2(a) LSq-2(a)	10-14 10-14	50-2 50-2	50-2 70-2	
	f. Slash seam at top of gusset; turn crown seam toward center; turn gusset seams toward front of crown. Raise stitch around the crown (1/8 to 3/16 inch from folded edge beginning at face opening, extending to and across gusset seam, ending at opposite crown seam face opening. or Raise stitch crown 1/8 to 3/16 inch from folded edges, then raise stitch gusset seam 1/8 to 3/16 inch from folded edge.	301 301	LSq-2(b) LSq-2(b)	10-14 10-14	50-2 50-2	50-2 50-2	
6.	Make perforations in earlap linings. Make perforations in each earlap lining as indicated by marks on pattern. The perforations shall be free of ridges and rough or hard edges.						
7.	Make lining and attach labels. Finished appearance. The lining pieces shall be neatly joined without twists, puckers, or pleats and with joining seams matching the outer crown pieces. The top and side pieces shall be well shaped. The labels shall be centered, straight, and the stitching shall not be through the printing.						
	a. Stitch folded darts of side crown tapering to nothing 1/2 to 5/8 inch beyond end of dart.	301	OSf-1	10-14	50-2	50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make lining and attach labels. (cont'd)						
	b. Center instruction label on right side crown lining and the combination identification-size label on the left side crown lining and stitch on all four sides 1/8 ± 1/16 inch from edge. The labels shall be on the unnapped surface. The stitching shall not be through the printing.	301	LSbj-1	8-14	50-2	50-2	
	c. Stitch gusset lining piece to top crown lining piece.	301 or 401	LSq-2(a) LSq-2(a)	10-14 10-14	50-2 50-2	50-2 70-2	
	d. Precrease sweatband 3/8 ± 1/16 inch along top edge and 5/8 ± 1/16 inch along bottom edge. The sweatband shall measure 1 ± 1/8 inch wide on the finished cap.						
	e. Stitch top crown lining and attached gusset to side crown lining pieces and earlap linings with each end of the sweatband caught in the seaming. The bottom edge of the side crown lining pieces shall be inserted between the 5/8 inch fold of the sweatband. The earlap linings shall overlap the bottom edge of sweatband 3/8 inch. The ends of the sweatband and earlaps may be tacked to hold in position. The side crown darts shall be turned toward the center of crown.	301 or 401	LSq-2(a) LSq-2(a)	10-14 10-14	50-2 50-2	50-2 70-2	
	f. Turn seams toward top crown and raise stitch 1/8 to 3/16 inch across back and both sides of top crown. The raised stitching may extend to bottom of sweatband.	301	LSq-2(b)	10-14	50-2	50-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Attach sweatband.						
	a. Stitch the top folded edge of sweatband to the crown lining 1/16 to 1/8 inch from folded edge.	301	LSd-1	10-14	50-2	50-2	
	b. Insert the bottom edge of crown lining between the 5/8 inch fold of sweatband and stitch to crown lining 1/16 to 1/8 inch from raw edge of sweatband.	301	SSw-2(a)	10-14	50-2	50-2	
	NOTE: The sweatband need not be precreased (operation 7.d) if conformance to all other requirements has been met.						
9.	Attach earlap lining to earlap shell.						
	Finished appearance. The earlap shall finish without pleats or puckers. Binding shall be neat and uniform in width with stitching evenly gaged.						
	a. Place earlap lining on the inside of earlap shell and stitch raw edges together 1/8 to 3/16 inch from edge along sides and across bottom.	301, 401, 504, or 505	SSa-1 SSa-1	10-14 10-14	50-2 50-2	50-2 70-2	
	NOTE: When an overedge stitch is used, the guides and knives shall be set to trim only the ravelled ends of the fabric.						
	b. Turn in raw edges of bias bindings (see operation 1.c) and bind sides and bottom.	301	BSc-1	10-14	50-2	50-2	
	- or -						
	c. Stitch one side of the bias binding to sides and bottom edges on the inside of cap.	301	BSg-2(a)	10-14	50-2	50-2	

Source: https://assist.dla.mil/ -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Attach earlap lining to earlap shell. (cont'd)						
	- and -						
	d. Fold binding to the outside, turn in raw edges and stitch 1/16 to 3/32 inch from edge.	301	BSg-2(b)	10-14	50-2	50-2	
	NOTE: The binding shall finish 5/16 ± 1/16 inch wide.						
10.	Join top of earlap lining to earlap shell.						
	Seam earlap to crown at front ends catching the binding securely in the stitching (see operation 5.c). Continue the stitching, seaming the earlap lining to the earlap crown joining seam, with the row of stitching superimposed or adjacent to the stitching of the earlap-to-crown joining seam (see operation 5.c).	301 or 401	SSa-1 SSa-1	10-14 10-14	50-2 50-2	50-2 70-2	
11.	Finish sweatband.						
	Using the earlap-to-lining joining seam as a guide, place the lower (folded) edge of sweatband on top of earlap. Turn in the raw edge of sweatband on top of earlap. Turn in the raw edge at front, and on outside stitch sweatband to cap through all plies 1/16 to 1/8 inch from edge (from gusset seam to gusset seam), securely tacking each end of sweatband. Do not distort the fabric on the inside of the cap.	301	LSe-1	10-14	50-2	50-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Attach forehead flap.						
	a. Center forehead flap (loop side up) on outside front of crown, so that the overedged straight edge of flap is 1/4 to 3/8 inch up from crown edge at center and each end is even with crown-to-earlap joining seam. Stitch flap to crown through all plies, 1/4 to 5/16 inch from bottom edge, with the chain ends (see operation 4.b) folded under the flap and caught in the stitching.	301		10-14	50-2	50-2	
	b. Bartack each end of flap with 1/2 inch horizontal bartacks which shall superimpose the ends of the stitching of operation 12.a.	Bartack		28 per bartack	50-2	50-2	
13.	Make earlap buttonholes.						
	Make buttonhole in each earlap with eyelet end toward the front, positioned parallel to the sweatband stitching (canting ± 3/16 inch) with eyelet 2 inches ± 1/8 inch from the face opening and 1-5/8 inches ± 1/4 inch from the sweatband stitching.	Buttonhole		76-80 per buttonhole including tack	50-2 or B	50-2 or B	
14.	Attach back elastic.						
	Center elastic webbing on back of earlap (over gusset) at marks, as indicated on pattern; turn in each raw end 3/16 to 5/16 inch and box stitch. The box pattern shall measure 13/16 to 7/8 inch in length by 3/16 to 1/4 inch in width. Ends of stitching shall be overlapped with not less than 3 stitches. This operation may be performed on an automatic stitching machine.	301		10-14	50-2	50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil-- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Attach fastener tapes to earlaps. Position the loop portions of the fastener tape on the inside of the left earlap and the hook portions on the outside of the right earlap as indicated by marks on the pattern. Stitch each piece to the earlaps along all edges (including each abutted edge) with the stitching not less than 1/16 inch from the edge. Continue stitching through the center (1/8 inch tolerance off center) with the stitching parallel to the sides (see figure 1). The end(s) of the stitchings shall be overlapped not less than 1/2 inch. One side of the fastener tape shall be tangent to the binding on face opening. The line of stitching through the center of the hook tapes may be continuous by pivoting one inch from the bottom of the diagonally positioned tape.	301	LSbj-1	10-14	B	B	
16.	Clean cap. a. Trim all thread ends to 1/4 inch maximum and remove loose threads on inside and outside of cap. b. Remove all shade markings or tickets. c. Clean all spots and stains.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. The finished caps shall conform to measurements for each respective size, as shown in table III.

TABLE III. Finished measurements

	Cap size (inches)						Tolerance
	6-1/2	6-3/4	7	7-1/4	7-1/2	7-3/4	
Inside circumference 1/	21	21-3/4	22-1/2	23-1/4	24	24-3/4	± 1/2
Gusset width 2/	2	2	2	2	2	2	± 1/4

1/ Measure the inside circumference at center of sweatband without stretching.

2/ Measure across the top of gusset at top crown joining seam.

3.9 Workmanship. The end item shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection. Inspection of sub-assemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with specified requirements. The Government reserves the right to exclude from consideration for acceptance, any material or service for which in-process inspection has indicated nonconformance.

4.4.3 End item visual examination. The end items shall be examined for the defects listed in table IV. The lot size shall be expressed in units of caps. The sample unit shall be one cap. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 6.5 for major and minor A combined defects, and 15.0 for total (major, minor A, and minor B combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Material defects and damages	Any hole, cut, tear, or needle chew on outside:			
	-up to 1/8 inch in diameter or length			301
	-more than 1/8 inch but not more than 1/4 inch		201	
	- more than 1/4 inch	101		
	Any hole, cut, tear, or needle chew on inside (except required holes around buttonholes):			
	-up to 1/4 inch in diameter or length			302
	- more than 1/4 inch but not more than 1/2 inch		202	
	-more than 1/2 inch	102		
	Any mend, darn, patch, or splice	103		
	Friction burn:			
	-when fibers are broken use "hole, cut, tear, or needle chew" classification			
	-more than 1/4 inch in length			303
	Drill hole exposed on outside			304
	Weakening defects:			
	Smash	104		
	Multiple float or loose slub:			
	-on outside		203	
	-on inside			305
	Unsightly slub or shade bar:			
	-on outside		204	
	-on inside			306
Shaded parts	Outside part shaded			307
	Forehead flap lining and earlap linings shaded			308
Cleanness	Any spot or stain on outside			309
	One or more shade tickets not removed			310
	Any shade marking visible on outside			311
	Thread ends not trimmed, or loose threads not removed throughout cap			312

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein)	105		
	Any part or required operation not as specified		205	
Cutting	Any component part not cut in conformance with directional lines indicated on patterns or not in accordance with specification requirements	106		
Seams and stitching	Accuracy of seaming:			
	-seam twisted, puckered, or pleated		206	
	-part of material caught in unrelated operation or stitching	107		
	-stitching overlapping end(s) of thread break less than 1/2 inch			313
	-ends of stitching not secured as specified		207	
	Gage of stitching:			
	-irregular, i.e., unevenly gaged or corresponding stitching not uniform (to be scored only when condition exists along major portion of seam)		208	
	-not within range of gage specified or varies more than 1/16 inch when no range is specified			314
	Stitches broken or missing (all stitching except buttonholes):			
	-up to 1/4 inch inclusive			315
	-more than 1/4 inch but not more than 1/2 inch		209	
	-more than 1/2 inch	108		
	Skipped stitches:			
	-1/4 inch to 1/2 inch long		210	
	-more than 1/2 inch long	109		
	Run-offs:			
	-1/4 inch to 1/2 inch long			316
	-more than 1/2 inch long		211	
	Raw edge more than 1/8 inch long			317

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Seam or stitch type not as specified			318
	Stitches per inch (except on elastic webbing) more than maximum or less than minimum specified			319
	Stitches per inch on elastic webbing: -more than maximum specified	110		
	-less than minimum specified			320
	Stitch tension (except on bartacks): -loose tension resulting in a loose seam	111		
	Loose tension (exposed loops of top or bottom threads): -on outside		212	
	-on inside			321
	Tight tension (stitches break when strain is applied in the direction of the seam or stitching		213	
	Loose tension or bartacks			322
	Overedge stitching exposed beyond finished edges of binding: -on inside			323
	-on outside	112		
Labels	Missing, incorrect, or illegible: -combination identification-size label	113		
	-instruction label		214	
	Either label not stitched on all four sides			324
	Any label not positioned as specified			325
	Stitching through the printing on any label			326
	Ends of stitching overlapping less than three stitches			327
Outside crown	Fleece side of forehead flap on the underside, when flap is in the "up" position	114		
	Straight edge of forehead flap less than 1/4 inch or more than 3/8 inch from center front edge of cap		215	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Outside crown (cont'd)	One or both ends of forehead flap not even with crown-to-earlap joining seam by more than 1/8 inch			328
	One or both bartacks at ends of forehead flap omitted		216	
	Bartack(s) at ends of forehead flap less than 3/8 or more than 1/2 inch long			329
	Bartack(s) not superimposed on ends of stitching joining forehead flap to cap		217	
	Forehead flap not stitched to cap through all plies	115		
	Forehead flap not centered over face opening by more than 1/4 inch		218	
	Chain ends of overedge stitching on forehead flap not turned under flap and caught in the stitching		219	
Earlaps	Buttonhole stitching(s) not securely caught in the fabric causing stitches to pull away from fabric	116		
	Buttonhole purling(s) not on outside or ends not securely tacked		220	
	Buttonhole(s) not specified type or uncut		221	
	Buttonhole(s) omitted	117		
	One or more broken stitches or more than two skipped stitches in buttonhole		222	
	Inside edge of buttonhole eyelet(s) less than 1-7/8 or more than 2-1/8 inches from bound edge of face opening		223	
	Inside edge of buttonhole eyelet(s) less than 1-3/8 inches or more than 1-7/8 inches from sweatband stitching		224	
	Ragged edges on buttonhole(s)			330
	Gimp omitted in buttonhole(s)		225	
	Cut length of buttonhole(s):			
	-less than 1 inch long	118		
	-more than 1-1/8 inches long			331
	Binding twisted or stretched (wavy)			332
	Binding not securely caught in fabric (binding can be pulled from fabric)	119		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Earlaps (cont'd)	Binding less than 1/4 or more than 3/8 inch wide			333
	Row of stitching through the center of the hook or loop fastener tape(s) omitted	120		
	End(s) of stitching on fastener tape(s) overlapped less than 1 inch		226	
	Fastener tape stitching(s) not across each piece at abutted ends	121		
	Elastic webbing misplaced or crooked			334
	Ends of elastic webbing not box stitched		227	
	Elastic webbing stitched to cap without stretching, or gusset material stretched		228	
	Elastic webbing less than 2 inches or more than 2-1/4 inches long			335
	Loop portion of fastener tape not on inside of left earlap	122		
	Hook portion of fastener tape not on outside of right earlap	123		
	Rounded end of hook tape more than 1/8 inch from binding or the abutted end(s) more than 1/8 inch apart		229	
	Side of fastener tape(s) not tangent to binding at face opening by more than 1/8 inch			336
	Ear perforations missing		230	
	Edges or hard edges on ear perforations	124		
	Outside ply(s) tight or full	125		
Inside cap	Napped surface of crown lining faces out		231	
	Lining(s) (crown and earlap) tight or full		232	
	Sweatband twisted or puckered	126		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Inside cap (cont'd)	Sweatband less than 7/8 inch or more than 1-1/8 inches wide			337
	Sweatband extending below crown at front of cap by 1/16 inch or more			338
	More than one seam splice in the sweatband piece		233	

4.4.4 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of caps. The sample unit shall be one cap. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling
	Bulged or distorted container

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

Examine	Defect
Content	Number of bundles per container is more or less than required Number of caps per bundle is more or less than specified Size shown on one or more caps not as specified on outer container 1/

1/ For this defect, two bundles from each container in the sample shall be examined.

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each cap shall be laid flat on its side with the unfastened earlap extensions superimposed. The earlap extensions shall be folded together back over on the earlap. Ten folded caps of one class and size only shall be neatly stacked in a bundle, with every other one reversed (bottom to crown), and securely crosstied with cotton tape or twine.

5.1.2 Commercial. The caps shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Eighty caps of one class and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A bundles shall be packed flat two in length, two in width, and two in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Eighty caps of one class and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bundles shall be packed flat two in length, two in width, and two in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. The caps, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

5.3 Palletization. When specified (see 6.2), caps, packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The cap is intended for wear by military personnel of the Department of Defense. It is worn alone or as a liner for the helmet assembly.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Class and size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article is required (see 3.1, 4.3, and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

6.5 International standardization agreements. Certain provisions of this specification are the subject of international standardization agreement as cited in NATO, STANAG No. 2333. When amendment, revision, or cancellation of this specification is proposed which will modify the international agreement concerned, the preparing activity will take appropriate action through international standardization channels, including departmental standardization offices, to change the agreement or make other appropriate accommodations.

6.6 Subject term (key word) listing.

Equipment, cold climate
Hat, Arctic
Headwear

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes, with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

(Project 8415-0678)

Review activities:

Army - MD
Navy - MC
Air Force - 11, 82
DLA - CT

User activity:

Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

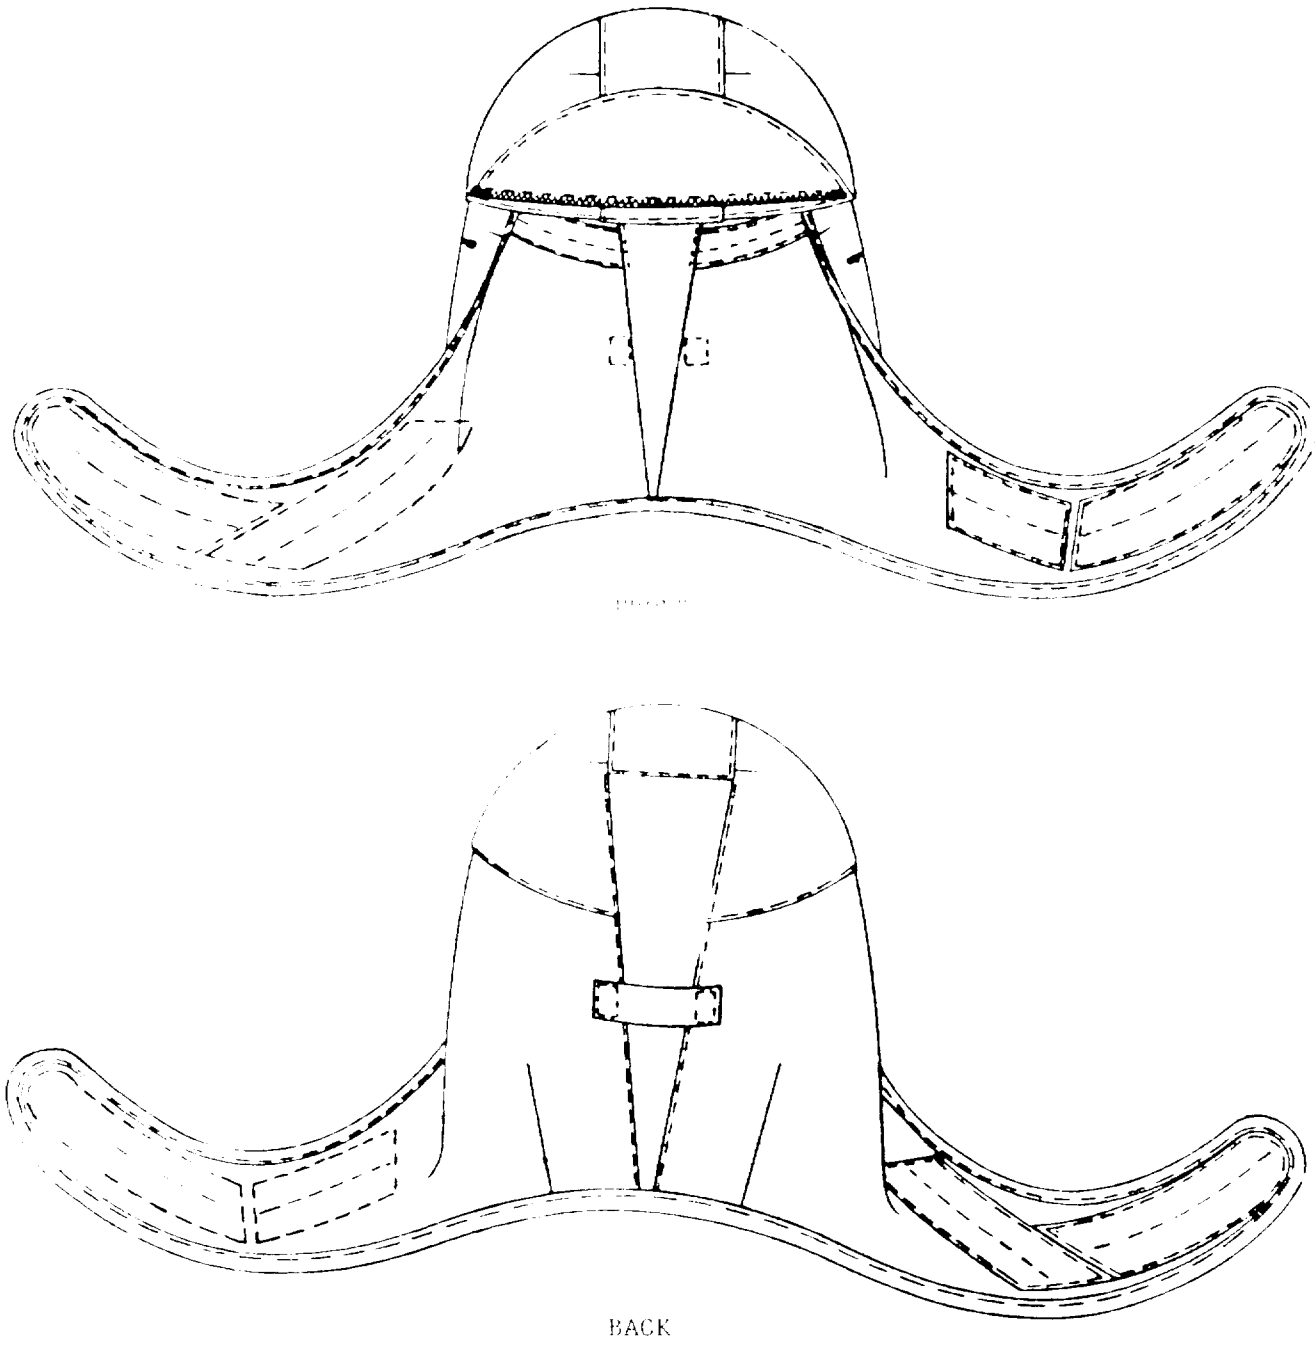


FIGURE 1. Cap, cold weather, insulating helmet liner.

☆U.S. GOVERNMENT PRINTING OFFICE: 1989 - 604-033/13730

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-43549C	Cap, Cold Weather, Insulating, Helmet Liner

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:40Z
Check the source to verify that this is the current version before use.