MIL-I-43561A(GL)
9 March 1977
SUPERSEDING
MIL-I-43561(GL)
24 January 1968

MILITARY SPECIFICATION

INSECT NET, HEAD AND HAND, SET

This specification is approved for use by the Natick Research and Development Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and size of insect net, head and hand, set consisting of one headnet and two handnets.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

PPP-B-676 - Boxes, Setup
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Seaming

MILITARY

MIL-C-43352 - Cloth, Netting, Nylon, Tulle, Tricot

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads for 40" X 48" Pallets

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Guide samples when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.3 Materials.

3.3.1 Cloth, nylon tulle. The cloth for the insect net set shall conform to class 1 of MIL-C-43352 except the color shall be black.

3.3.2 Cord, braided nylon. The nylon cord for the headnet shall be braided nylon cord (fish line), 16 filament, 45-pound (20.4 kg) test, color black.

3.3.3 Cord, rubber core. The elastic cord for the handnet shall be 1/16 inch (0.2 cm) diameter, core of 2 strands of 24-gage rubber, nylon covered, color black.

3.3.4 Thread, polyester. The polyester thread for the insect net set for seaming and stitching shall be black and shall conform to type I, class 1, subclass A, size A of V-T-285.

3.4 Design. The design shall be as shown on figure 1.

3.5 Patterns. Standard patterns will be furnished by the Government. The Government patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the Government patterns.

3.6 Construction. The construction shall conform to the requirements specified in table I and herein. The insect net set shall consist of one headnet and two handnets.

3.6.1 Stitches, seams, and stitching. All stitches, seams and stitching shall conform to FED-STD-751. The type of seam, stitching and stitches per inch shall be as specified in table I.

3.6.1.1 Type 301 stitching. Ends of all stitching except when caught in other seams or stitching shall be backstitched or overstitched one inch (2.5 cm) minimum. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

3.6.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of one inch (2.5 cm) back of the end of the stitching. 1/

b. Thread breaks, two or more consecutive skipped stitches or run-offs noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of one inch (2.5 cm) in back of the defective area, continue over the defective area and continue a minimum of one inch (2.5 cm) beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the material, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

3.6.1.2 Types 502 and 503 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.1.1.1a and 3.6.1.1.1b except substitute 3/4 inch (1.9 cm) for one inch (2.5 cm) wherever one inch (2.5 cm) appears.

3.6.1.3 Thread ends. All thread ends shall be trimmed to a length of not more than 1/4 inch (0.6 cm).

3.6.2 Repairs. Except as otherwise specified herein, repairs are not allowed to be made to the insect net.

3.6.3 Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.3.1 shall be removed from production and replaced with non-defective components.

3.7 Manufacturing operation requirements. The insect net set shall be made in accordance with the manufacturing operations listed in table I. The contractor is not required to follow the exact sequence of operations listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. The headnet and handnets shall be cut in accordance with the patterns. Finished dimensions specified in table II shall be achieved without stretching the cloth.						
2.	Seaming. Join the respective headnet and handnet parts by overedge stitching as shown on figure 1 with 1/8 to 3/16 inch (0.3 to 0.5 cm) gage.	502 or 503	SSa-1	6-8	A	A	
3.	Hem bottom of headnet and install braided cord. The overall hem shall be 11/16 ± 1/16 inch (1.7 ± 0.2 cm) and shall be stitched 1/2 ± 1/16 inch (1.3 ± 0.2 cm) from turned outer edge. The braided nylon cord shall be inserted before hemming. The cut length of the braided cord shall be 48 ± 1/2 inches (122 ± 1.3 cm). A 2-inch (5.1 cm) loop shall be securely formed by a slip knot at each end. The tunnel formed by the hem shall be left with a 1 ± 1/8 inch (2.5 ± 0.3 cm) opening in the approximate center of the headnet as shown in figure 1. The stitching at the opening shall be backstitched not less than one inch (2.5 cm).	301	EFa-1	8-10	A	A	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Hem bottom of handnets and install elastic cord. The overall hem shall be 11/16 ± 1/16 inch (1.7 ± 0.2 cm) and shall be stitched 1/2 ± 1/16 inch (1.3 ± 0.2 cm) from turned outer edge. The elastic cord shall be inserted before hemming. The cut length of the elastic cord shall be 16-1/2 ± 1/4 inches (41.9 ± 0.6 cm) in length. The elastic cord shall be folded in half and the ends joined with a knot securely tied, 1/2 ± 1/16 inch (1.3 ± 0.2 cm) from the ends. The ends of the knotted cord shall be caught in the hem stitching at the end of one of the side seams.	301	EFa-1	8-10	A	A	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished insect net set shall conform to the measurements in table II. Measurements A and B shall be made as indicated in figure 1.

TABLE II. Measurements of finished set

	Width (A) (inches)	Length (B) (inches)
Headnet (1 each)	17-1/4 ± 1/2 (43.8 ± 1.3 cm)	17-1/4 ± 1 (43.8 ± 2.5 cm)
Handnet (2 each)	10-1/4 ± 1/2 (26 ± 1.3 cm)	22 ± 1 (55.9 ± 2.5 cm)

3.9 Workmanship. The finished set shall conform to the quality of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the preproduction sample submitted in accordance with 3.2, shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.4.1.1 Certification. The contractor shall furnish a certificate of compliance certifying that the nylon cord and elastic cord specified in 3.3.2 and 3.3.3 conform to the specified requirements.

4.4.2 In-process inspection. In-process inspection shall be performed to verify that the working patterns conform to the Government patterns in all respects and that the cut lengths of the nylon cord and elastic cord are as specified. Whenever nonconformance is noted, corrections shall be made to the items affected and lot in-process. Items which cannot be corrected shall be removed from production.

4.4.3 Examination of the end item. The end item shall be examined in accordance with 4.4.3.1 and 4.4.3.2. The inspection levels and acceptable quality levels (AQLs) shall be as specified in 4.4.3.3. The sample unit shall be one insect net set consisting of one headnet and two handnets. The lot size shall be expressed in units of one insect net set.

4.4.3.1 Visual examination. Defects found during visual examination shall be classified in accordance with the list below:

Examine	Defect	Classification Major	Minor
Cloth, nylon, tulle	Any hole, cut, tear, abraded area or burn	X	
	Any broken or missing yarns or multiple floats	X	
	Any mend, darn or patch	X	
	Any needle chew	X	
Nylon cord	Cut or abraded area	X	
Seams and stitching:			
Open seams	Any open seam exclusive of hems	X	
	On hems:		
	- Up to and including 1/4 inch (0.6 cm)		X
	- Over 1/4 inch (0.6 cm)	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Seams and stitching: (cont'd)			
Open seams (cont'd)			
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped stitches or runoffs occur.		
Seam and stitch type	Seam type or stitch type not as specified	X	
	Any seam excessively pleated or puckered		X
Stitches per inch	One or two stitches per inch less than minimum specified		X
	Three or more stitches per inch less than specified	X	
	Two or more stitches in excess of maximum specified		X
	NOTE: Defects for stitches per inch shall be scored only when condition exists on major portion of seam, i.e., more than half the length of the seam or stitch pattern.		
Stitching ends	Ends of stitching not secured as specified (except when caught in other stitching or turned under in a hem)		X
Thread breaks, skipped stitches or runoffs	Overstitched less than specified in each direction beyond the defective stitching area		X
	NOTE: On all types of stitching, thread breaks, or two or more consecutive skipped stitches or runoffs not overstitched shall be classified as open seams.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Stitch tension	Loose, resulting in loose needle or bobbin thread or excessively tight resulting in excessive puckering of material		X
Rows of stitching	Any row omitted	X	
Components and assembly	Any component caught in any unrelated operation of stitching (not otherwise classified herein)	X	
	Any component part omitted or not attached as specified (not otherwise classified herein)	X	
	Any unauthorized repair	X	
	Ends of knotted cord on handnet not caught in hem stitching		X
	Ends of cord on handnet not tied (check by feel)	X	
	Loops not formed on ends of cord on headnet		X
Cleanness	Grease or oil stains clearly noticeable; thread ends not trimmed throughout, as specified		X

4.4.3.2 Dimensional examintaion. Examination shall be made for compliance with all dimensions specified in table I, including stitch margins and gauge, and table II. Any dimension that is not within the specified tolerance shall be classified as a defect.

4.4.3.3 Inspection levels and acceptable quality levels (AQLs). The inspection levels and acceptable quality levels expressed in defects per 100 units shall be as follows:

Examination	Inspection level	AQLs Major	Total
For defects applicable to 4.4.3.1, visual	II	2.5	10.0
For defects applicable to 4.4.3.2, dimensional	S-3	-	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

4.4.4 Packaging inspection. An examination shall be made to determine that the preservation-packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Examination for closure defects listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling, open and noncontinous heat sealed seams of polyethylene bag. Dimensions of polyethylene bag are greater than specified. Bulged or distorted container.
Content	Number of intermediate packages per container is more or less than required. Number of unit packages per intermediate package is more or less than required. 1/

1/ For this defect two intermediate packages shall be examined from each container in the sample.

4.4.5 Palletization inspection. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. One complete insect net set consisting of one headnet and two handnets shall be folded and compressed into a rectangular shape, and packaged in a snug fitting clear polyethylene bag of 0.003-inch (0.076 mm) thickness (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The compression process shall not damage, tear, or cause any other defect to the headnet or handnets. The polyethylene bag shall be closed by heat sealing. Prior to or during the final heat sealing closure operation, excess air within the bag shall be expelled. The final package dimension shall not exceed 2-9/16 inches (6.5 cm) in length, 2-5/16 inches (5.9 cm) in width, and 3/4 inches (1.9 cm) in depth.

5.1.1.2 Intermediate packaging. Forty-eight unit packages, packaged as described in 5.1.1.1, shall be placed in a snug-fitting paperboard box conforming to variety 1, style III, type G, class 1, of PPP-B-566; set up paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676; or fiberboard box conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 125 of PPP-B-636. Box closure shall be secured with minimum 2-inch (5.1 cm) width gummed tape conforming to type III, grade A of PPP-T-45.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial packaging. The insect net sets shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A packing. Five hundred and seventy-six insect net sets, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSc, grade V2s of PPP-B-636. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.4.4.

5.2.2 Level B packing. Five hundred and seventy-six insect net sets, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the box specification, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Insect net sets, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Palletization. When specified (see 6.2), insect net sets, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

5.4 Marking. In addition to any special marking required by the contract, interior packages, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.4.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

6. NOTES

6.1 Intended use. The insect net, head and hand, set is a component of the reserve packet, the latter of which is a component of the Survival Kit, Individual, Hot-Wet Environment. The survival kit contains survival items intended for use by individuals under survival or evasive conditions.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article sample is required (see 3.2).
(c) Selection of applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(e) When palletization is required (see 5.3).

6.3 Guide samples. For access to guide samples, address the procuring office issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample consisting of one insect net set. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

Custodian:

Army - GL

Review activities:


Army - MD
DLA - CT

Preparing activity:


Army - GL

Project No. 8415-A590

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

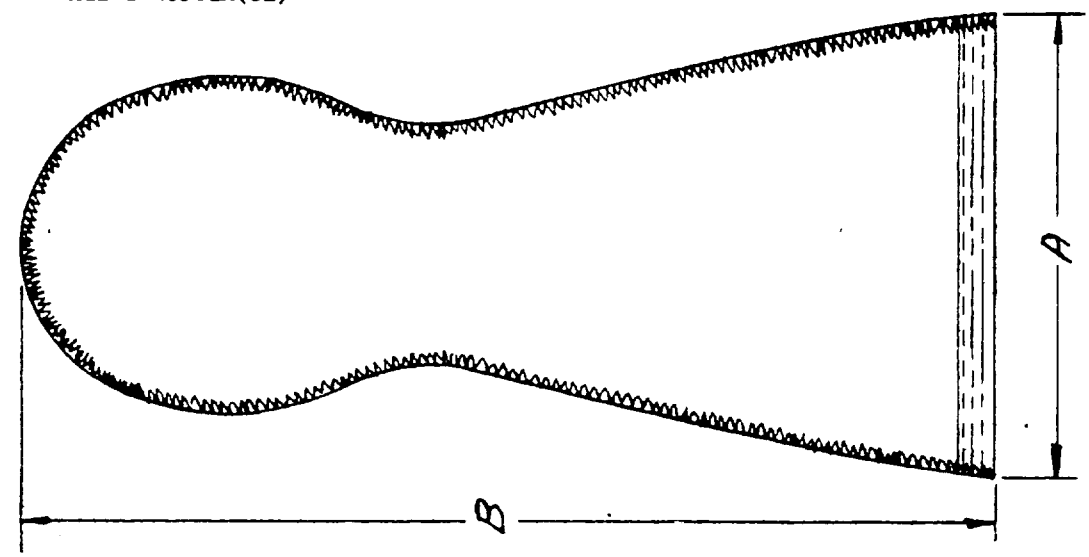

HANDNET

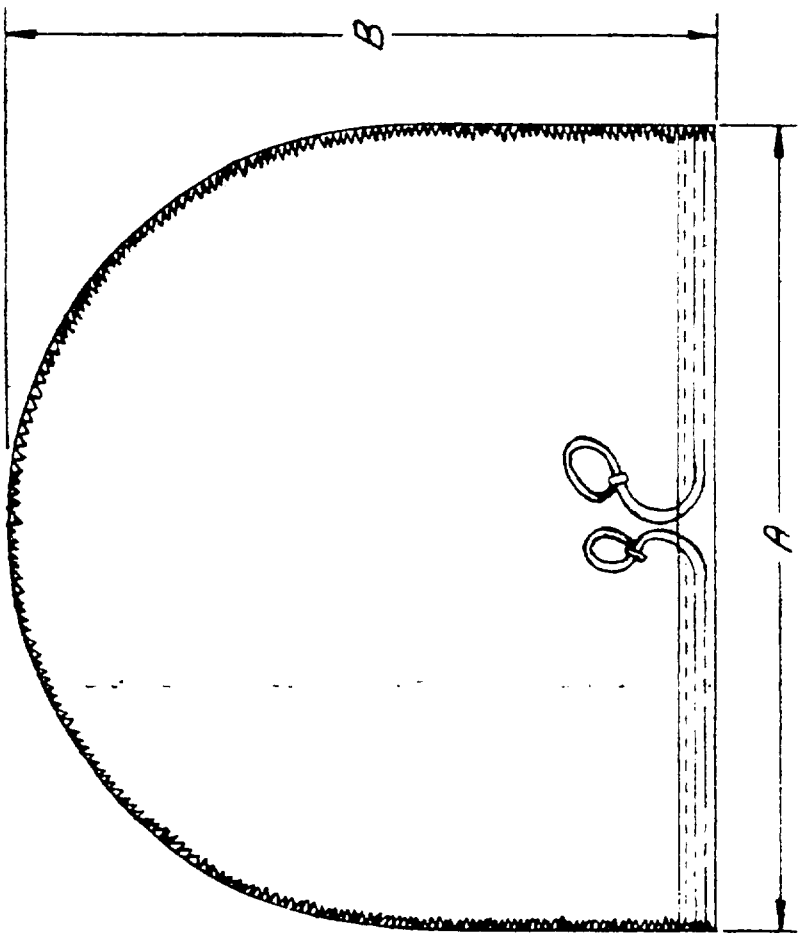

HEADNET

FIGURE 1 INSECT NET, HEAD-HAND SET 2-1-503

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

US Army Natick Research &
Development Command
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:42Z
Check the source to verify that this is the current version before use.