NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/12E
1 May 1997
SUPERSEDING
MIL-D-3943/12D
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, LEGION OF MERIT, CHIEF COMMANDER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

OBVERSE

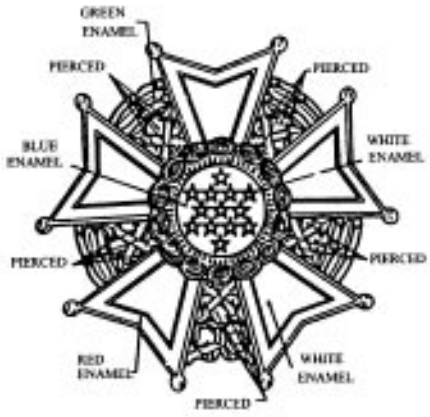

REVERSE

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
DIAMETER:
BASE: 2-15/16 inches (7.46 cm) (REF)
CENTER DEVICE: 1-1/8 inches (2.86 cm) (REF)

THICKNESS (At thickest point):
BASE: 0.185 inch ± 0.005 inch (0.470 cm ± 0.012 cm)
DEVICE: 0.140 inch ± 0.005 inch (0.356 cm ± 0.012 cm)
OVERALL: 0.325 inch ± 0.010 inch (0.826 cm ± 0.025 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be the pin and catch type.

3. The attaching device shall be located and soldered on a horizontal line 1-1/8 inch + 1/32 inch - 0 (2.86 cm + 0.08 cm - 0) below the top of the decoration. The pin shall be formed from 0.057 inch ± 0.002 inch (1.45 cm ± 0.005 cm) diameter nickel silver wire and shall be 2-1/32 inches ± 1/32 inch (5.16 cm ± 0.08 cm) in finished length.

4. Pierced areas shall be as indicated.

5. Enamel colors shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample. The white enamel areas of the five (5) rays shall be convex within the dikes.

COLOR	CHIP NO.
Red	4
Green	11
Blue	20
White	28

6. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

7. The base shall be spherically dapped to a radius of 3-1/32 inch ± 1/16 inch (7.70 cm ± 0.16 cm). The center device shall be dapped so as to fit flush on the base.

8. The center device shall be secured to the base by means of two brass tubular rivets.

9. Unless otherwise specified, the finished decoration shall be wrapped in three thicknesses of tissue paper and placed in a unit box. The dimensions of the unit box shall be determined by the contractor.

10. Decoration set shall consist of a chest pin, a service ribbon with a ribbon attachment and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VI, Style 5 with a Class 1 or 1A pad.

11. The ribbon for the service ribbon shall conform to MIL-DTL-11589/80.

12. The lapel button shall conform to MIL-DTL-11484/10.

13. The ribbon attachment shall conform to MIL-DTL-41819/1.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.