NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/12K
13 July 2026
SUPERSEDING
MIL-DTL-3943/12J
29 April 2021

DETAIL SPECIFICATION SHEET


DECORATION, LEGION OF MERIT, CHIEF COMMANDER


This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

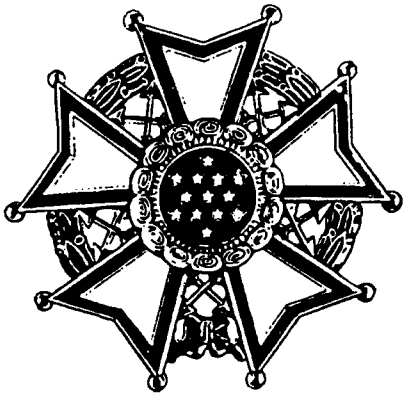

OBVERSE

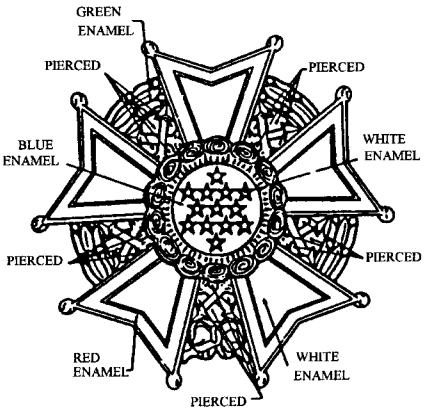

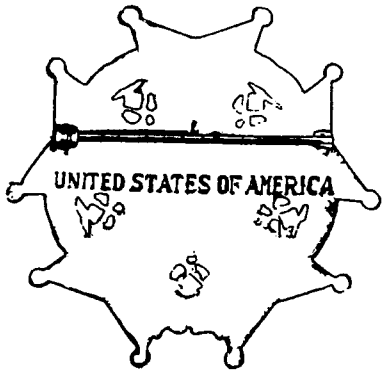

REVERSE

MATERIAL: Gilding Metal 95/5 (UNS Alloy No. C-210)

FINISH: Epoxy resin, 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8

DIMENSIONS:
DIAMETER:
BASE: 2-15/16 inches (REF)
CENTER DEVICE: 1-1/8 inches (REF)
THICKNESS (At thickest point):
BASE: 0.185 inch ± 0.005 inch
DEVICE: 0.140 inch ± 0.005 inch
OVERALL: 0.325 inch ± 0.010 inch

ATTACHING DEVICE:
1: Attaching device shall be the pin and catch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:45Z
Check the source to verify that this is the current version before use.

2: The attaching device shall be located and soldered on a horizontal line 1-1/8 inch + 1/32 inch - 0 below the top of the decoration. The pin shall be formed from 0.057 inch 0.002 inch diameter nickel silver wire and shall be 2-1/32 inches ± 1/32 inch in finished length.

DECORATION SET: Decoration set shall consist of a chest pin, a service ribbon with a ribbon attachment and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VI, Class 1 pad.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. The base shall be spherically dapped to a radius of 3-1/32 inch ± 1/16 inch. The center device shall be dapped so as to fit flush on the base.

4. The center device shall be secured to the base by means of two brass tubular rivets.

5. Unless otherwise specified, the finished decoration shall be wrapped in three thicknesses of tissue paper and placed in a unit box. The dimensions of the unit box shall be determined by the contractor.

6. The specification slash sheet for the ribbon for the service ribbon is MIL-DTL-11589/80.

7. The specification slash sheet for the lapel button is MIL-DTL-11484/10.

8. The specification slash sheet for the ribbon attachment is MIL-DTL-41819/1.

EPOXY: Epoxy resin shall be applied to the Decoration as indicated above and shall match TIOH Hard Epoxy Color Chip Numbers listed below.

TIOH HARD EPOXY COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#4
Green	#11
Blue	#20
White	#28

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:45Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Navy - MC
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - CG1
DLA - CT

(Project No. 8455-2026-415)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:45Z
Check the source to verify that this is the current version before use.