NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/13N
10 July 2025
SUPERSEDING
MIL-DTL-3943/13M
31 May 2022

DETAIL SPECIFICATION SHEET


DECORATION, LEGION OF MERIT, OFFICER AND LEGIONNAIRE


This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

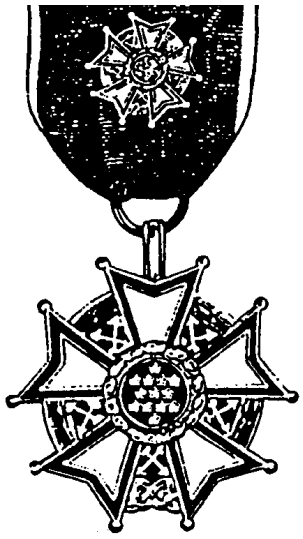

OBVERSE

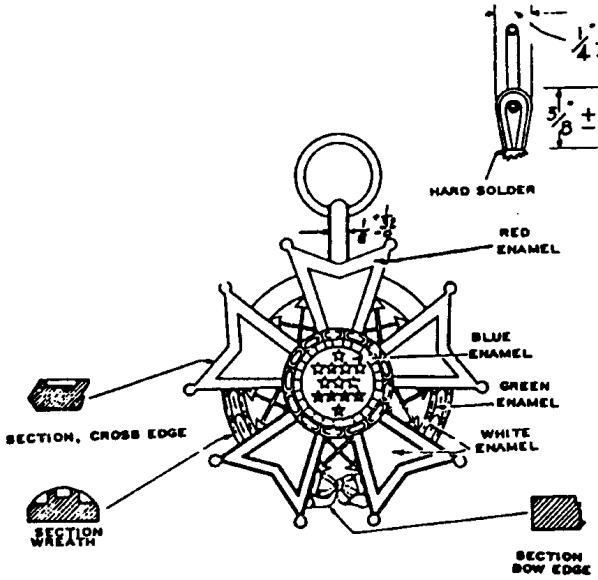

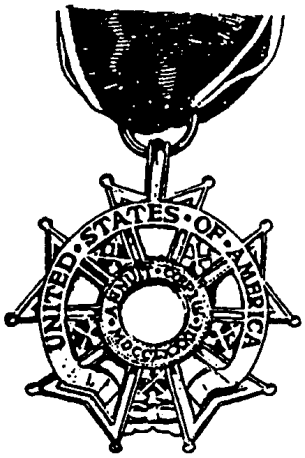

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
OBVERSE: Epoxy resin, 24K Gold Plated, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.
REVERSE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DIAMETER:
-1: 1-7/8 inches (REF)
-2: 15/16 inch (REF)
HEIGHT (including lug):
-1: 2 inches (REF)
-2: 1 inch (REF)
THICKNESS (overall):
-1: 0.215 inch ± 0.010 inch
-2: 0.140 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal with ribbon attachment, miniature medal with ribbon attachment, service ribbon, and lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type IV, Class 5 pad.

EPOXY:

1. Epoxied areas shall be as shown. Epoxy resin (stoning epoxy) may be at the option of the manufacturer. When hard enamel is used, the material requirement shall be gilding metal. When epoxy is used, the material requirement shall be either red brass or gilding material. Colors shall conform to TIOH Hard Enamel Color Chip Numbers listed below:

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#20
Red	#4
Green	#11
White	#28

2. The white enameled areas in the five (5) rays on the obverse side of the pendant shall be convex within the dikes.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. No piercing required.

3. The center portion of the reverse of the pendant shall be smooth, flat, and suitable for engraving.

4. The finished pendant ribbon length for -1 shall be 1-7/8 inches ± 1/8 inch.

5. The design of the Officer and Legionnaire are identical except the Officer shall have the 3/4 inch diameter pendant ribbon device conforming to MIL-DTL-41819/2 centered on the pendant ribbon as shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.

6. The service ribbon for the Legion of Merit, Officer shall have the 3/8 inch diameter pendant ribbon device conforming to MIL-DTL-41819/2 centered on the service ribbon.

7. On an optional basis, the lug may be fabricated with one end an integral part of the pendant. Care should be taken that no sharp edges result from the bending and closure operation.

8. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/80.

9. The specification slash sheet for the lapel button is MIL-DTL-11484/10.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Navy - NU
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2025-205)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:46Z
Check the source to verify that this is the current version before use.