NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/6D
1 May 1997
SUPERSEDING
MIL-D-3943/6C
24 June 1994

DETAIL SPECIFICATION SHEET

DECORATION, AIR FORCE CROSS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

OBVERSE

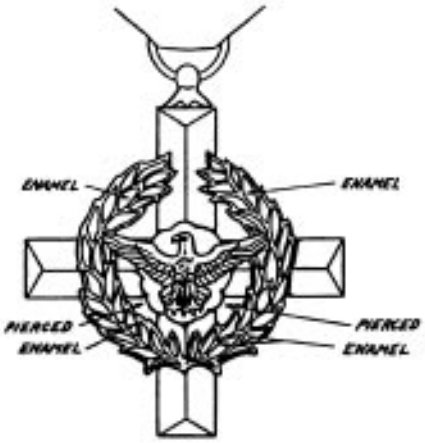

REVERSE

MATERIAL:
CROSS: Red Brass
WREATH: Gilding Metal

DASH NO.
-1: Regular Size
-2: Miniature Size

FINISH:
CROSS: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 4.
WREATH: Soft Baked Enameled, Gold Plated, Rose Gold Plated, Relieved.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:42Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (Overall):
-1: 2-3/16 inches (5.56 cm) (REF)
-2: 1-1/8 inches (2.86 cm) (REF)

WIDTH (Overall):
-1: 1-29/32 inches (4.84 cm) (REF)
-2: 15/16 inch (2.38 cm) (REF)

THICKNESS (At Thickest Point):
CROSS:
-1: 0.190 inch ± 0.005 inch (0.483 cm ± 0.012 cm)
-2: 0.130 inch ± 0.005 inch (0.340 cm ± 0.012 cm)

WREATH:
-1: 0.070 inch ± 0.005 inch (0.178 cm ± 0.012 cm)
-2: 0.040 inch ± 0.005 inch (0.102 cm ± 0.012 cm)

ASSEMBLED (At Eagle's Breast):
-1: 0.310 inch ± 0.010 inch (0.787 cm ± 0.025 cm)
-2: 0.200 inch ± 0.010 inch (0.508 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The cloud and wreath shall be superimposed on the cross and shall be secured to the cross by soft soldering or by use of two solid brass drive rivets.

3. If drive rivets are used, the length of the rivets shall be controlled to insure no deformation occurs on the reverse side of the decoration.

4. Enamel color shall be green as indicated. The enamel color shall conform to TIOH chip number 12 or the standard sample.

5. Pierced areas shall be as indicated.

6. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type IV, Style 4 with a Class 1 or 1A pad.

7. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/2.

8. The lapel button shall conform to MIL-DTL-11484/3.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99

(Project No. 8455-0887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:42Z
Check the source to verify that this is the current version before use.

DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:42Z
Check the source to verify that this is the current version before use.