NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/6E
11 May 1999
SUPERSEDING
MIL-DTL-3943/6D
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, AIR FORCE CROSS

Inactive for new design after 14 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

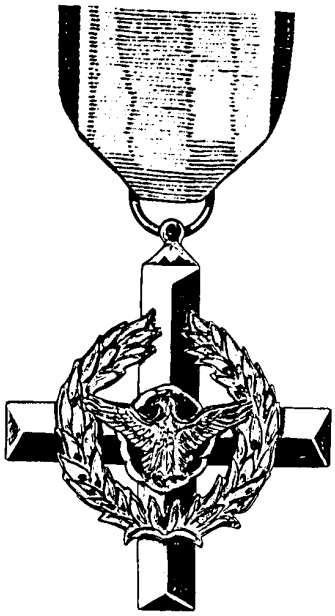

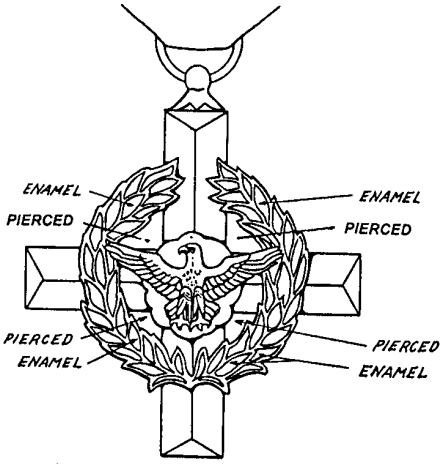

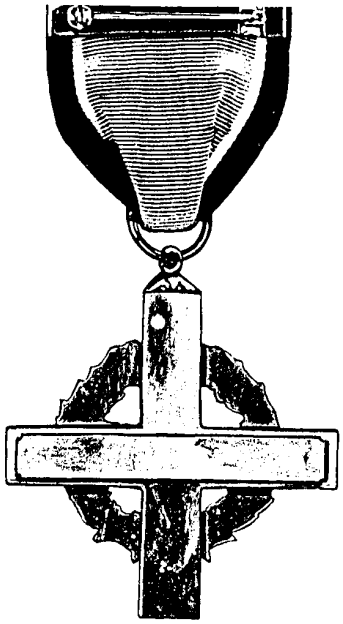

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:

CROSS: Red Brass
WREATH: Gilding Metal

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:42Z
Check the source to verify that this is the current version before use.

FINISH:

CROSS: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 4.
WREATH: Soft Baked Enameled, Gold Plated, Rose Gold Plated, Relieved.

DIMENSIONS:

HEIGHT (overall):
-1: 2-3/16 inches (REF)
-2: 1-1/8 inches (REF)
WIDTH (overall):
-1: 1-29/32 inches (REF)
-2: 15/16 inch (REF)

THICKNESS (at thickest point):
CROSS:
-1: 0.190 inch ± 0.005 inch
-2: 0.130 inch ± 0.005 inch
WREATH:
-1: 0.070 inch ± 0.005 inch
-2: 0.040 inch ± 0.005 inch
ASSEMBLED (at eagle's breast):
-1: 0.310 inch ± 0.010 inch
-2: 0.200 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The cloud and wreath shall be superimposed on the cross and shall be secured to the cross by soft soldering or by use of two solid brass drive rivets.

3. If drive rivets are used, the length of the rivets shall be controlled to insure no deformation occurs on the reverse side of the decoration.

4. Enamel color shall be green as indicated. The enamel color shall conform to TIOH Hard Enamel Color Chip Number 12.

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

6. Pierced areas shall be as indicated.

7. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type IV, Style 4 with a Class 1 or 1A pad.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:42Z
Check the source to verify that this is the current version before use.

8. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/2.

9. The lapel button shall conform to MIL-DTL-11484/3.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0978)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:42Z
Check the source to verify that this is the current version before use.