INCH-POUND

MIL-DTL-3943/6H
27 June 2016
SUPERSEDING
MIL-DTL-3943/6G
29 May 2007

DETAIL SPECIFICATION SHEET


DECORATION, AIR FORCE CROSS

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943.



OBVERSE

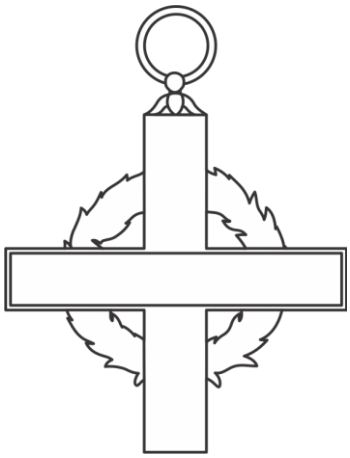

REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
CROSS: Red Brass 85/15 (UNS Alloy No. C-230)
WREATH: Gilding Metal 95/5 (UNS Alloy No. C-210)

FINISH:
CROSS: Oxidized, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 4.
WREATH: Epoxy resin, 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:41Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall):
-1: 2-3/16 inches (REF)
-2: 1-1/8 inches (REF)
WIDTH (Overall):
-1: 1-29/32 inches (REF)
-2: 15/16 inch (REF)
THICKNESS (At thickest point):
CROSS:
-1: 0.190 inch ± 0.005 inch
-2: 0.130 inch ± 0.005 inch
WREATH:
-1: 0.070 inch ± 0.005 inch
-2: 0.040 inch ± 0.005 inch
ASSEMBLED (At eagle's breast):
-1: 0.310 inch ± 0.010 inch
-2: 0.200 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type IV, Style 4 with a Class 1 or 1A pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The cloud and wreath shall be superimposed on the cross and shall be secured to the cross by soft soldering or by use of two solid brass drive rivets.

3. If drive rivets are used, the length of the rivets shall be controlled to insure no deformation occurs on the reverse side of the decoration.

4. Pierced areas shall be as indicated.

5. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/2.

6. The specification slash sheet for the lapel button is MIL-DTL-11484/3.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Green	#12

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:41Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2016-527)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:41Z
Check the source to verify that this is the current version before use.