NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/6L
10 March 2023
SUPERSEDING
MIL-DTL-3943/6K
21 June 2017

DETAIL SPECIFICATION SHEET

DECORATION, AIR FORCE CROSS

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943.

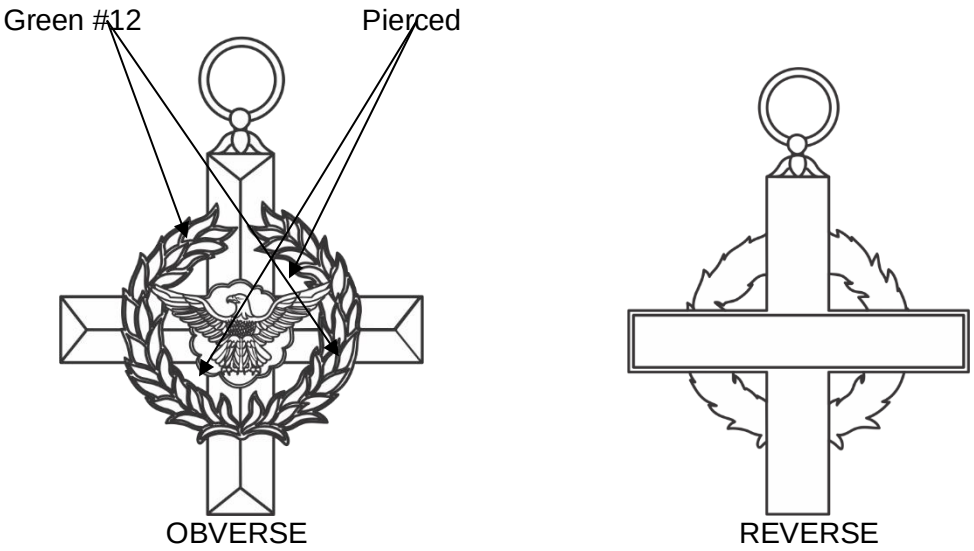

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
CROSS: Red Brass 85/15 (UNS Alloy No. C-230)
WREATH: Gilding Metal 95/5 (UNS Alloy No. C-210)

FINISH:
CROSS: Oxidized, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 4.
WREATH: Epoxy resin, 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:41Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall):
-1: 2-3/16 inches (REF)
-2: 1-1/8 inches (REF)
WIDTH (Overall):
-1: 1-29/32 inches (REF)
-2: 15/16 inch (REF)
THICKNESS (At thickest point):
CROSS:
-1: 0.190 inch ± 0.005 inch
-2: 0.130 inch ± 0.005 inch
WREATH:
-1: 0.070 inch ± 0.005 inch
-2: 0.040 inch ± 0.005 inch
ASSEMBLED (At eagle's breast):
-1: 0.310 inch ± 0.010 inch
-2: 0.200 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type IV, Style 4 with a Class 1 or 1A pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The cloud and wreath shall be superimposed on the cross and shall be secured to the cross by soft soldering or by use of two solid brass drive rivets.

3. If drive rivets are used, the length of the rivets shall be controlled to insure no deformation occurs on the reverse side of the decoration.

4. Pierced areas shall be as indicated.

5. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/2.

6. The specification slash sheet for the lapel button is MIL-DTL-11484/3.

7. For commercial sale only may be manufactured using 24K Gold Plate Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:41Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Green	#12

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2023-103)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:41Z
Check the source to verify that this is the current version before use.