NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/7N(IH)
14 September 2023
SUPERSEDING
MIL-DTL-3943/7M(IH)
14 November 2018

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

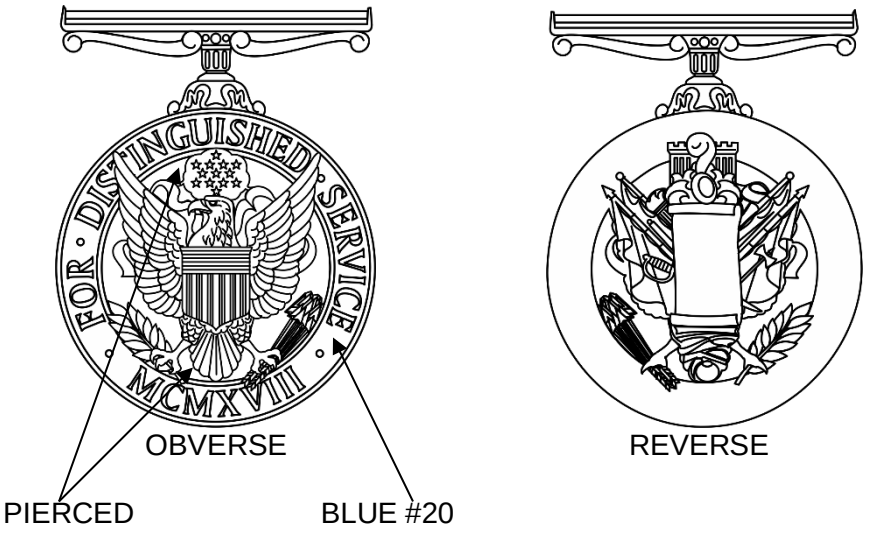

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1: PENDANT: Epoxy resin, 24KGold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
SUSPENSION BAR: 24KGold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

-2: Epoxy resin, 24KGold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:42Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
PENDANT:
HEIGHT (Pendant and suspension bar):
-1: 1-31/32 inches (REF)
-2: 1 inch (REF)
DIAMETER:
-1: 1-1/2 inches (REF)
-2: 3/4 inch (REF)
THICKNESS:
-1: 0.215 inch ± 0.010 inch
-2: 0.110 inch ± 0.010 inch
SUSPENSION BAR (-1 only):
HEIGHT (overall): 9/32 inch (REF)
WIDTH (overall): 1-3/8 inches (REF)
THICKNESS (at thickest point): 0.160 inch ± 0.010 inch

SUSPENSION RIBBON BAR: The suspension ribbon bar for -1 shall be made from brass wire 0.045 inch ± 0.002 inch in diameter and shall be riveted to the suspension bar at each end.

PENDANT: The pendant shall be secured to the suspension bar by a swivel joint formed by a round bar from the pendant passing completely through the suspension bar and the end peened.

DECORATION SET: Decoration set shall consist of a regular size medal, a miniature size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Style III, Type V with a Class 1 or 2 pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. For -2 is one piece construction.

3. When hard enamel is used, the material requirement shall be Gilding Metal 95/5 (UNS Alloy No. C-210).

4. Pierced areas shall be as indicated.

5. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/52.

6. The specification slash sheet for the lapel button is MIL-DTL-11484/4.

7. For commercial sale only may be manufactured using 24K Gold Plate Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:42Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#20

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2023-212)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:42Z
Check the source to verify that this is the current version before use.