NOT MEASUREMENT SENSITIVE


MIL-D-3943/8C
7 August 1991
SUPERSEDING
MIL-D-3943/8B
31 March 1987

MILITARY SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

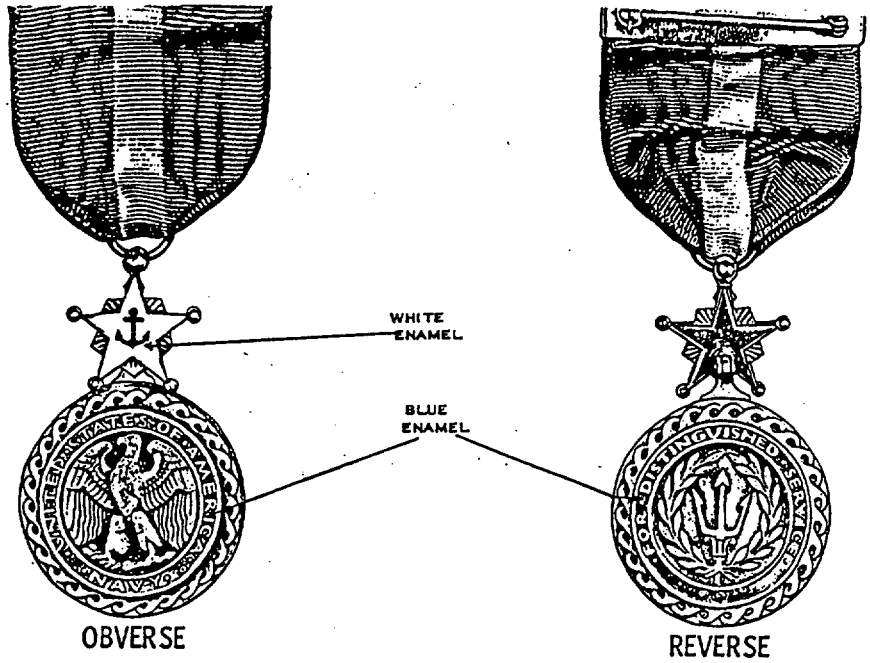

MATERIAL: Gilding Metal

DASH NO.
-1: Regular size
-2: Miniature size

DIMENSIONS:
PENDANT:
HEIGHT (INCLUDING HINGE ROTOR):
-1: 1-1/2 inch (3.81 cm) (REF)
-2: 27/32 inch (2.14 cm) (REF)

WIDTH (OVERALL):
-1: 1-1/4 inch (3.18 cm) (REF)
-2: 5/8 inch (1.59 cm) (REF)

THICKNESS (AT THICKEST POINT):
-1: .190 inch ± .010 inch (0.482 cm ± 0.025 cm)
-2: .130 inch ± .010 inch (0.330 cm ± 0.025 cm)

AMSC N/A
FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:43Z
Check the source to verify that this is the current version before use.

SUSPENSION STAR:
HEIGHT (INCLUDING LUG):
-1: 29/32 inch (2.30 cm) (REF)
-2: 7/16 inch (1.11 cm) (REF)
WIDTH (OVERALL):
-1: 25/32 inch (1.98 cm) (REF)
-2: 3/8 inch (0.95 cm (REF)
THICKNESS (AT THICKEST POINT):
-1: .125 inch ± .010 inch (0.317 cm ± 0.025 cm)
-2: .075 inch ± .010 inch (0.190 cm ± 0.025 cm)

FINISH:
PENDANT: Hard enameled, rose gold plated, matte finish, relieved highlights, lacqured
STAR: Hard enameled, rose gold plated, matte finish, lacqured

NOTES:
1. Suspension star shall be secured to the pendant by a hinge joint.

2. The hinge shall be 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm) high by 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm) wide by 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm) deep for Dash No. 1 and 1/16 inch ± 1/64 inch (0.16 cm ± 0.04 cm) high by 1/16 inch ± 1/64 inch (0.16 cm ± 0.04 cm) wide by 3/32 inch ± 1/64 inch (0.24 cm ± 0.04 cm) deep for Dash No 2. Hinges shall be soldered to the vertical centerline of the star 5/32 inch ± 1/64 inch (0.40 cm ± 0.04 cm) up from the lower edge for Dash No. 1 and 5/64 inch ± 1/64 inch (0.20 cm ± 0.04 cm) up from the lower edge for Dash No. 2.

3. The enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NO.
WHITE	28
BLUE	20

4. Type I decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, style 6, Type VIII with class 1 or 1A pad.

5. The ribbon for the pendant drape and service ribbon shall conform to MIL-R-11589/102.

6. The lapel button shall conform to MIL-L-11484/5.

7. The use of any type of plastic packaging material is prohibited.

Custodians:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-N611)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:43Z
Check the source to verify that this is the current version before use.