NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/8F
1 May 1997
SUPERSEDING
MIL-D-3943/8E
24 June 1994

DETAIL SPECIFICATION SHEET

# DECORATION, DISTINGUISHED SERVICE MEDAL, NAVY AND MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

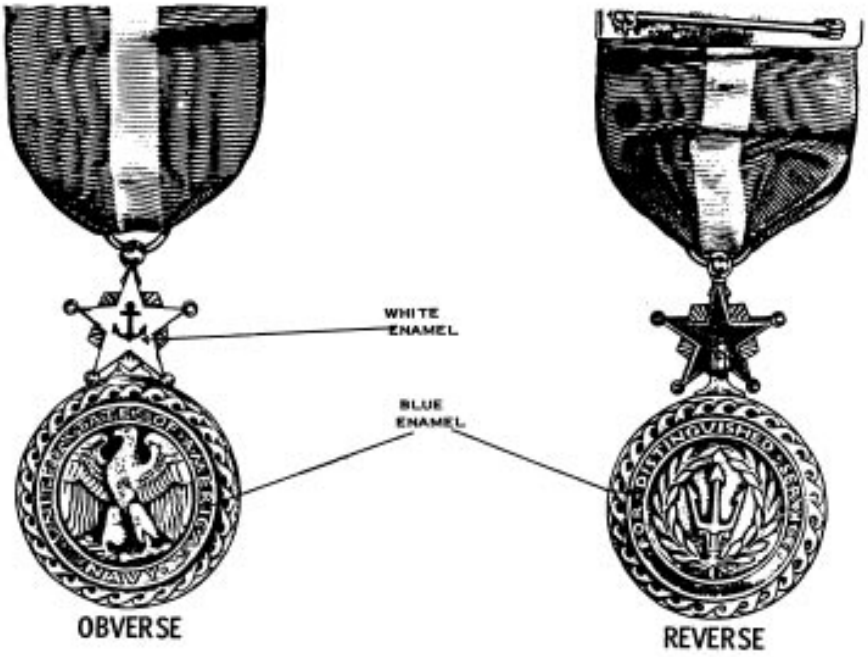


MATERIAL: Gilding Metal

DASH NO.
-1: Regular Size
-2: Miniature Size

FINISH:
PENDANT: Hard Enameled, Gold Plated, Rose Gold Plated, Matte Finish, Relieved Highlights.
STAR: Hard Enameled, Gold Plated, Rose Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 19.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:43Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:

HEIGHT (Including Hinge Rotor):
-1: 1-1/2 inches (3.81 cm) (REF)
-2: 27/32 inch (2.14 cm) (REF)

DIAMETER:
-1: 1-1/4 inches (3.18 cm) (REF)
-2: 5/8 inch (1.59 cm) (REF)

THICKNESS (At thickest Point):
-1: 0.190 inch ± 0.010 inch (0.482 cm ± 0.025 cm)
-2: 0.130 inch ± 0.010 inch (0.330 cm ± 0.025 cm)

SUSPENSION STAR:

HEIGHT (Including Lug):
-1: 29/32 inch (2.30 cm) (REF)
-2: 7/16 inch (1.11 cm) (REF)

WIDTH (Overall):
-1: 25/32 inch (1.98 cm) (REF)
-2: 3/8 inch (0.95 cm) (REF)

THICKNESS (At thickest Point):
-1: 0.125 inch ± 0.010 inch (0.317 cm ± 0.025 cm)
-2: 0.075 inch ± 0.010 inch (0.190 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enamel colors shall be as indicated. The colors shall conform to TIOH Color Chip numbers listed below or the standard sample.

| COLOR | CHIP NO. |
|---|---|
| Dark Blue | 20 |
| White | 28 |

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Suspension star shall be secured to the pendant by a hinge joint.

5. The hinge for Dash No. -1 shall be 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm) high by 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm) wide by 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm) deep. The hinge for Dash No. -2 shall be 1/16 inch ± 1/64 inch (0.16 cm ± 0.04 cm) high by 1/16 inch ± 1/64 inch (0.16 cm ± 0.04 cm) wide by 3/32 inch ± 1/64 inch (0.24 cm ± 0.04 cm) deep.

6. Hinges for Dash No. -1 shall be soldered to the vertical center line of the star 5/32 inch ± 1/64 inch (0.40 cm ± 0.04 cm) up from the lower edge. Hinges for Dash -2 shall be soldered to the vertical center line of the star 5/64 inch ± 1/64 inch (0.20 cm ± 0.04 cm) up from the lower edge.

7. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type V, Style 5 with a Class 1 or 1A pad.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:43Z
Check the source to verify that this is the current version before use.

8. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/102.

9. The lapel button shall conform to MIL-DTL-11484/5.

10. The use of any type of plastic packaging material is prohibited.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0887)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:43Z
Check the source to verify that this is the current version before use.