NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/8G
11 May 1999
SUPERSEDING
MIL-DTL-3943/8F
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, NAVY AND MARINE CORPS

Inactive for new design after 14 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

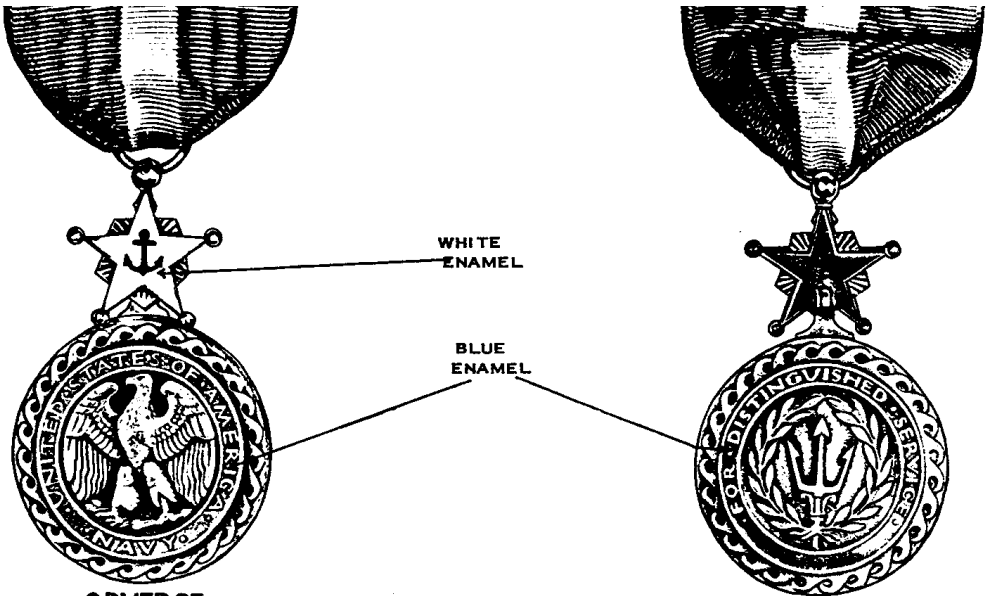

OBVERSE REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH:

PENDANT: Hard Enameled, Gold Plated, Rose Gold Plated, Matte Finish, Relieved Highlights.
STAR: Hard Enameled, Gold Plated, Rose Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 19.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:43Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:
HEIGHT (including hinge rotor):
-1: 1-1/2 inches (REF)
-2: 27/32 inch (REF)
DIAMETER:
-1: 1-1/4 inches (REF)
-2: 5/8 inch (REF)
THICKNESS (at thickest point):
-1: 0.190 inch ± 0.010 inch
-2: 0.130 inch ± 0.010 inch

SUSPENSION STAR:
HEIGHT (including lug):
-1: 29/32 inch (REF)
-2: 7/16 inch (REF)
WIDTH (overall):
-1: 25/32 inch (REF)
-2: 3/8 inch (REF)
THICKNESS (at thickest point):
-1: 0.125 inch ± 0.010 inch
-2: 0.075 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enamel colors shall be as indicated. The colors shall conform to TIOH Hard Enamel Color Chip Numbers listed below.

COLOR	CHIP NUMBER
Dark Blue	20
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

4. Suspension star shall be secured to the pendant by a hinge joint.

5. The hinge for Dash No. -1 shall be 1/8 inch ± 1/64 inch high by 1/8 inch ± 1/64 inch wide by 3/16 inch ± 1/64 inch deep. The hinge for Dash No. -2 shall be 1/16 inch ± 1/64 inch high by 1/16 inch ± 1/64 inch wide by 3/32 inch ± 1/64 inch deep.

6. Hinges for Dash No. -1 shall be soldered to the vertical center line of the star 5/32 inch ± 1/64 inch up from the lower edge. Hinges for Dash -2 shall be soldered to the vertical center line of the star 5/64 inch ± 1/64 inch up from the lower edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:43Z
Check the source to verify that this is the current version before use.

7. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type V, Style 5 with a Class 1 or 1A pad.

8. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/102.

9. The lapel button shall conform to MIL-DTL-11484/5.

10. The use of any type of plastic packaging material is prohibited.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-0978)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:43Z
Check the source to verify that this is the current version before use.