

MILITARY SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-D-3943.

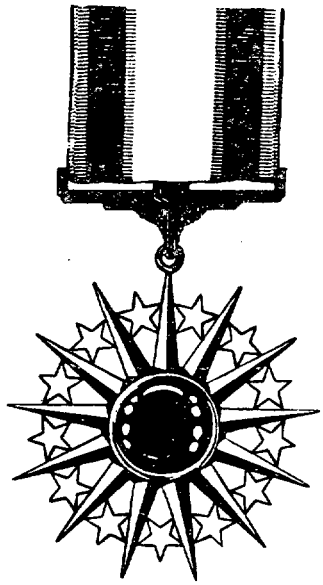


OBVERSE

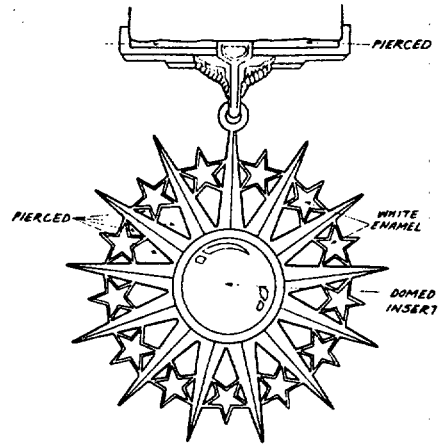

DASH NO.

-1: Regular Size
-2: Miniature Size

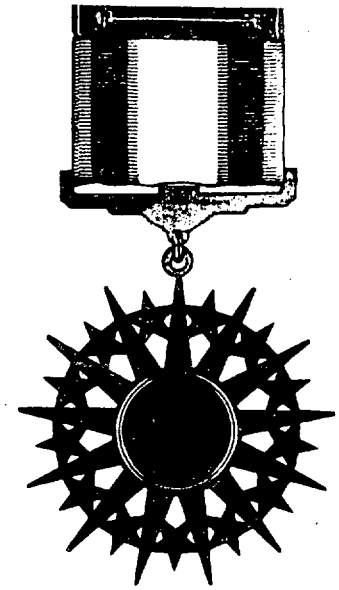

REVERSE

MATERIAL: BRONZE

DIMENSIONS (INCHES):

PENDANT

HEIGHT:
-1 (INCLUDING LUG): 2-1/4 (REF)
-2 (INCLUDING LUG): 1-3/16 (REF)

WIDTH (OVERALL):
-1: 2-1/8 (REF)
-2: 1-1/16 (REF)

THICKNESS (AT THICKEST POINT):
-1: .190 ± .005
-2: .115 ± .005

SUSPENSION BAR:

HEIGHT (OVERALL):
-1: 19/32 (REF)
-2: 5/16 (REF)

WIDTH (OVERALL):
-1: 1-19/32 (REF)
-2: 25/32 (REF)

THICKNESS (AT THICKEST POINT):
-1: .095 ± .005
-2: .065 ± .005

FINISH: ENAMELED, GOLD PLATED, MATTE FINISH

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:44Z
Check the source to verify that this is the current version before use.

NOTES:

1. THE CENTER DEVICE SHALL CONSIST OF A PLASTIC INSERT CEMENTED TO THE PENDANT USING A CELLULOSE ESTER CEMENT. THE PLASTIC INSERT SHALL BE 43/64 INCH IN DIAMETER FOR DASH NO. 1 AND 21/64 INCH IN DIAMETER FOR DASH NO. 2. PRIOR TO CEMENTING THE INSERT IN PLACE, THE ENTIRE BOTTOM OF THE RECESS IN THE PENDANT SHALL BE COVERED WITH AN ALUMINUM REFLECTING SHIELD .010 ± .002 INCH IN THICKNESS.

2. THE PLASTIC INSERT SHALL HAVE A CONSTANT MINIMUM THICKNESS OF .060 AND SHALL BE DOMED TO A RADIUS OF .720 FOR DASH NO. 1 AND .400 FOR DASH NO. 2. THE COLOR OF THE PLASTIC SHALL BE BLUE AND SHALL MATCH THE COLOR OF THE PLASTIC OF THE STANDARD OR APPROVED SAMPLE.

3. THE ENAMEL FOR THE STARS SHALL BE WHITE CONFORMING TO TIOH COLOR CHIP NUMBER 28 AND SHALL MATCH THE COLOR OF THE ENAMEL ON THE STANDARD OR APPROVED SAMPLE.

4. A RING FORMED FROM BRONZE WIRE SHALL BE SOLDERED ON THE VERTICAL CENTERLINE OF THE SUSPENSION BAR. THE CENTER OF THE RING SHALL BE LOCATED 7/64, +1/32, -0 INCH FROM THE BOTTOM OF THE SUSPENSION BAR FOR DASH NO. 1 AND 1/16, +1/32, -0 INCH FOR DASH NO. 2. THE RING FOR DASH NO. 1 SHALL BE FORMED FROM .065 ± .002 INCH WIRE AND SHALL HAVE AN OUTSIDE DIAMETER OF 7/32 ± 1/64 INCH. THE RING FOR DASH NO. 2 SHALL BE FORMED FROM .031 ± .002 INCH DIAMETER WIRE AND SHALL HAVE AN OUTSIDE DIAMETER OF 1/8 ± 1/64 INCH.

5. FOR DASH NO. 2 THE AREA AROUND THE STAR IS NOT PIERCED.

6. TYPE I DECORATION SET SHALL CONSIST OF A REGULAR SIZE MEDAL, A SERVICE RIBBON, A ROSETTE AND A LAPEL BUTTON ALL PACKAGED IN A PRESENTATION CASE CONFORMING TO MIL-C-14633, STYLE 6, TYPE VIII WITH CLASS 1 OR 1A PAD.

7. THE RIBBON FOR THE PENDANT DRAPE AND SERVICE RIBBON SHALL CONFORM TO MIL-R-11589/51.

8. THE ROSETTE SHALL CONFORM TO MIL-R-14649/19 AND THE LAPEL BUTTON SHALL CONFORM TO MIL-L-11484/70.

Custodian:
Army - IH
Air Force - 11

Review activity:
Other - CT
Air Force - 82,99

User activity:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455 - 0251)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:44Z
Check the source to verify that this is the current version before use.