
MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, COAXIAL, RADIO FREQUENCY, SERIES SSMB, PRINTED CIRCUIT BOARD MOUNT, RIGHT ANGLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39012.

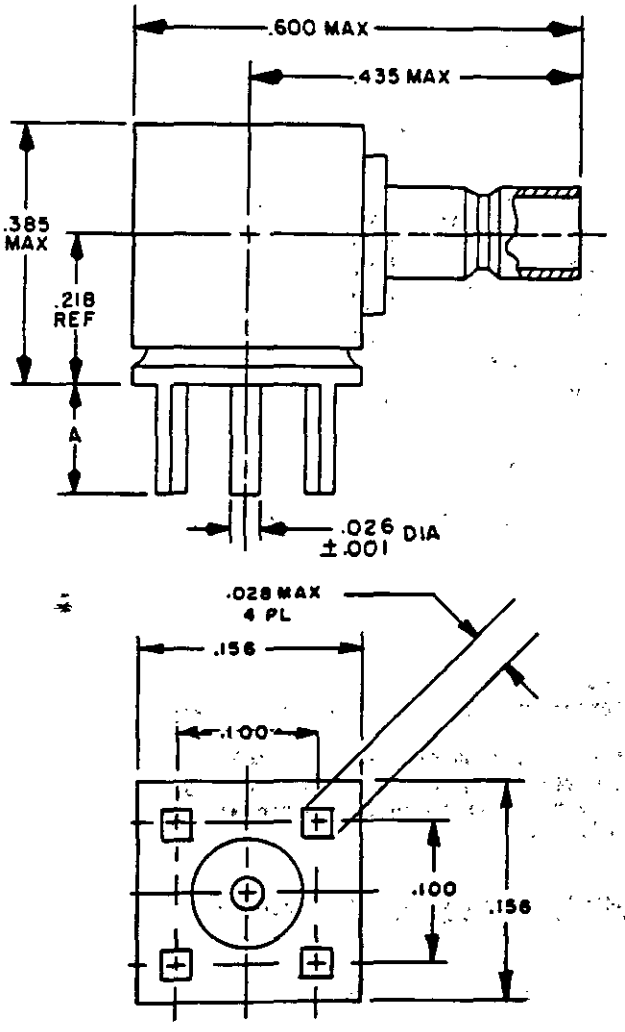

Dash number	Dimension A
See note 5 0001	.155 ±.010
See note 5 0002	.125 ±.010
See note 5 0003	.093 ±.010
0004	.155 ±.010
0005	.125 ±.010
0006	.093 ±.010

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:20Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.001	0.02	.155	3.94
.010	0.25	.156	3.96
.026	0.66	.218	5.54
.028	0.71	.385	9.78
.093	2.36	.435	11.05
.100	2.54	.600	15.24
.125	3.18		

NOTES:
1. Dimensions are in inches.
2. All undimensioned pictorial representations are for reference purposes only.
3. Unless otherwise specified, tolerances shall be ±.005.
4. Metric equivalents are given for general information only.
5. Connector bodies shall be gold plated in accordance with MIL-G-45204, type II, class I.

FIGURE 1. General configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:20Z
Check the source to verify that this is the current version before use.

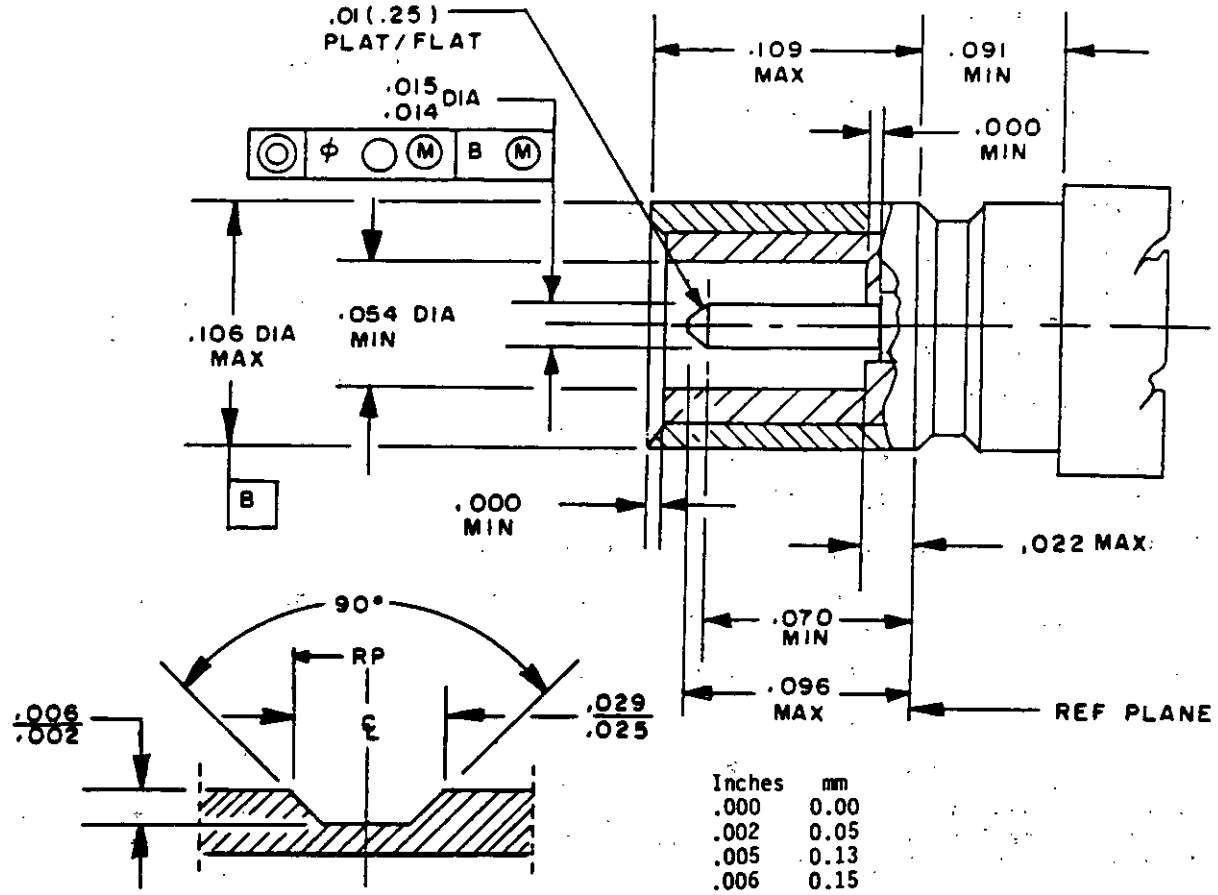

GROOVE DETAIL

Inches	mm
.000	0.00
.002	0.05
.005	0.13
.006	0.15
.014	0.36
.015	0.38
.022	0.55
.029	0.74
.054	1.37
.070	1.77
.091	2.31
.096	2.43
.106	2.69
.109	2.76

NOTES:
1. Dimensions are in inches.
2. All undimensioned pictorial represetations are for reference purposes only.
3. Unless otherwise specified, tolerances shall be ±.005.
4. Metric equivalents are given for general information only.

FIGURE 2. Interface dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:20Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Nominal impedance: 50 ohms.

Frequency range: 0 to 12.4 GHz.

Voltage rating: 250 V rms at sea level, 60 V rms at 70,000 feet.

Temperature rating: -65°C to +165°C.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Force to engage and disengage:

Longitudinal force: 6 pounds maximum engage, 2 pounds minimum disengage.

Torque: Not applicable.

Coupling proof torque: Not applicable.

Mating characteristics: See figure 2 for dimensions.

Hermetic seal: Not applicable.

Leakage (pressurized connectors): Not applicable.

Insulation resistance: Method 302, test condition B, in accordance with MIL-STD-202. 1,000 megohms minimum.

Center contact retention: 2 pounds minimum, axial force.

Solderability: Method 208 of MIL-STD-202. 1/

Voltage standing wave ratio (VSWR): Not applicable.

Connector durability: 500 cycles minimum, at 12 cycles per minute maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Initial: 6.0 pounds maximum engagement.

Final: 6.0 pounds maximum engage and disengage.
1.0 pound minimum disengagement.

Contact resistance: In milliohms, maximum:

	Initial	After environment
Center contact	4.0	6.0
Outer contact	1.0	1.5
Braid to body	Not applicable	Not applicable

1/ For quality conformance inspection, the test shall be performed in group B following VSWR; test five samples with no failures permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:20Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage: 500 V rms at sea level.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202, 15 G's.

Shock: Method 213, test condition B, MIL-STD-202, 75 G's at 6 milliseconds, 1/2 sine.

Thermal shock: Method 107, test condition B, MIL-STD-202.

Contact current rating: 1.0 ampere dc.

Moisture resistance: Not applicable.

Corona level: 125 V up to 75,000 feet.

RF high potential withstanding voltage:

Voltage and frequency: 400 volts rms at 5.0 MHz.

Leakage current: Not applicable.

Cable retention force: Not applicable.

Coupling mechanism retention force: Not applicable.

RF leakage: Not applicable.

Insertion loss: Not applicable.

NOTE: This specification sheet supersedes DESC drawing 86006 when a QPL source is obtained.

Part or Identifying Number (PIN): M39012/135- (dash number from figure 1).

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA


Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 17, 99

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3665-03)

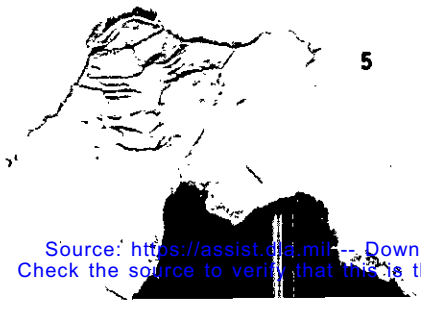

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:20Z
Check the source to verify that this is the current version before use.