INCH-POUND

MIL-PRF-39012/135C
w/AMENDMENT 1
15 July 2016
SUPERSEDING
MIL-PRF-39012/135C
2 July 2012

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, COAXIAL, RADIO FREQUENCY, SERIES SSMB, PRINTED CIRCUIT BOARD MOUNT, RIGHT ANGLE

Inactive for new design after, 02 July 2012.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39012.

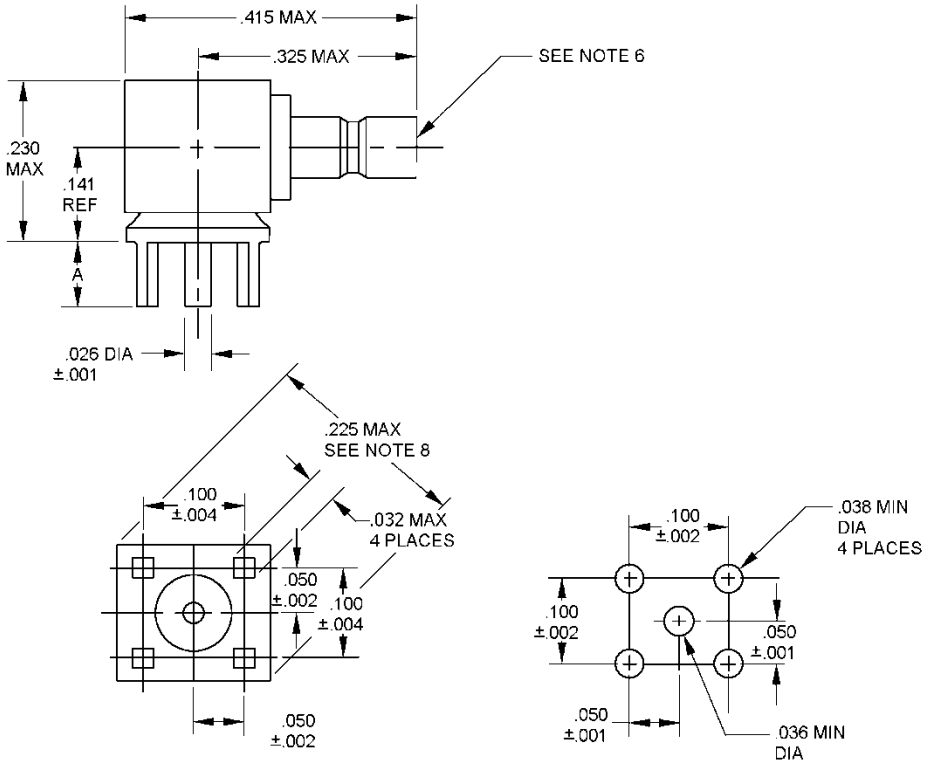

FIGURE 1. General configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

Dash number	Dimension A
0001 (see note 5)	.155(3.94) ± .010 (0.25)
0002 (see note 5)	.125 (3.18) ± .010 (0.25)
0003 (see note 5)	.093 (2.36) ± .010 (0.25)
0004 (see note 7)	.155 (3.94) ± .010 (0.25)
0005 (see note 7)	.125 (3.18) ± .010 (0.25)
0006 (see note 7)	.093 (2.36) ± .010 (0.25)

Inches	mm	Inches	mm
.001	0.02	.050	1.27
.002	0.05	.100	2.54
.004	0.10	.218	5.54
.026	0.66	.221	5.61
.030	0.76	.385	9.78
.036	0.91	.435	11.05
.038	0.97	.600	15.24

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. All undimensioned pictorial configurations are for reference purposes only.
4. Unless otherwise specified tolerances shall be ± .005 (0.13mm).
5. Connector bodies shall be gold plated in accordance with ASTM B488, type II, code C, class 1.27.
6. Series SSMB pin contact interface shall be in accordance with MIL-STD-348.
7. Connector bodies shall be silver plated in accordance with MIL-PRF-39012.
8. Configuration of base optional. Dimension .225 is the maximum envelope diameter.
9. Center contact shall be one piece or shall be manufactured in such a way that it is not damaged during normal manufacturing operations when the connector is soldered to a printed wiring board.

FIGURE 1. General configuration – Continued.

ENGINEERING DATA:

Nominal impedance: 50 ohms.
Frequency range: 0 to 12.4 GHz.
Voltage rating:
250 volts rms, maximum working voltage at sea level.
60 volts rms, maximum at 70,000 feet (4.437 kPa).
Temperature rating: - 65°C to + 165°C.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and MIL-STD-348.
Force to engage and disengage:
Longitudinal force: Not applicable.
Torque : Not applicable.
Coupling proof torque: Not applicable.
Inspection conditions: Not applicable.
Mating characteristics: In accordance with MIL-STD-348.
Hermetic seal: Not applicable.
Leakage (pressurized connector): Not applicable.
Insulation resistance: In accordance with MIL-STD-202-302, test condition B, 1,000 mega ohms minimum.
Center contact retention:
Minimum axial force : 2 pounds from mating end.

Solderability: For quality conformance inspection, the test shall be performed in group B following VSWR; test 5 samples with no failures permitted. In accordance with MIL-STD-202-208.

Corrosion (salt spray): In accordance with MIL-STD-202-101, test condition B.
Voltage standing wave ratio (VSWR): Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

Connector durability: 500 cycles minimum at 12 cycles/minute maximum.
Initial: 6.0 pound maximum engage.
Final: 6.0 pound maximum engage and disengage.
1.0 pound minimum disengagement.

Contact resistance: In milliohms maximum:

	Initial	After environment
Center contact	4.0	6.0
Outer contact	1.0	1.5
Braid to body	Not applicable	Not applicable

Dielectric withstanding voltage: In accordance with MIL-STD-202-301, 500 volts rms minimum at sea level.
Vibration, high frequency: In accordance with MIL-STD-202-204, test condition B, 15 G's.
Shock: In accordance with MIL-STD-202-213, test condition B, 75g's at 6 milliseconds, ½ sine.
Thermal shock: In accordance with MIL-STD-202-107, test condition B.
Moisture resistance: Not applicable.
Corona Level: 125 V up to 75,000 feet.
RF high potential withstanding voltage:
Voltage and frequency: 400 volts rms at a frequency at 5 MHz.
Leakage current: Not applicable.
Cable retention force: Not applicable.
Coupling mechanism retention force: Not applicable.
RF leakage: Not applicable.
Insertion loss: Not applicable.

Part or Identifying Number (PIN): M39012/135 – (dash number from figure 1).

Group qualification: See table I.

TABLE I. Group qualification and retention testing.

Group	Submission and qualification of any of the following connectors 1/	Qualifies the following connectors
I	M39012/133-0001 M39012/133-0002 M39012/133-0003 M39012/134-0001 M39012/134-0002 M39012/134-0003	M39012/133-0001 M39012/133-0002 M39012/133-0003 M39012/134-0001 M39012/134-0002 M39012/134-0003
II	M39012/133-0004 M39012/133-0005 M39012/133-0006 M39012/134-0004 M39012/134-0005 M39012/134-0006	M39012/133-0004 M39012/133-0005 M39012/133-0006 M39012/134-0004 M39012/134-0005 M39012/134-0006

1/ For qualification retention, where more than one part is listed in a group in this column, data may be supplied on any of these parts in order to retain qualification for those parts in the corresponding right hand column. The part used for qualification retention does not have to be the part initially qualified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-39012, this document references the following:

MIL-STD-348	MIL-STD-202-204	MIL-STD-202-301
MIL-STD-202-101	MIL-STD-202-208	MIL-STD-202-302
MIL-STD-202-107	MIL-STD-202-213	ASTM B488

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Review activities:
Army - AR, AT, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-2016-108)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:19Z
Check the source to verify that this is the current version before use.